

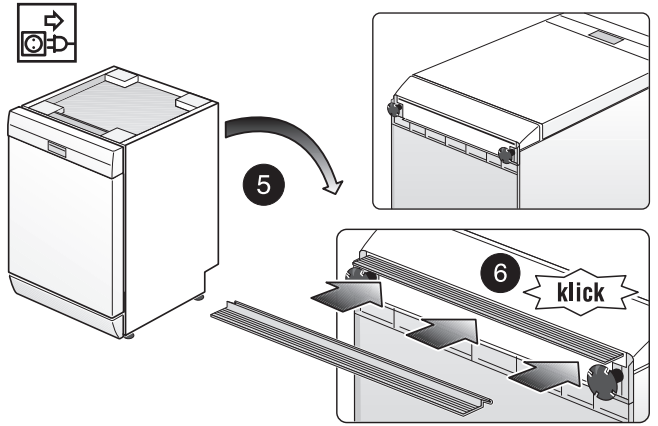
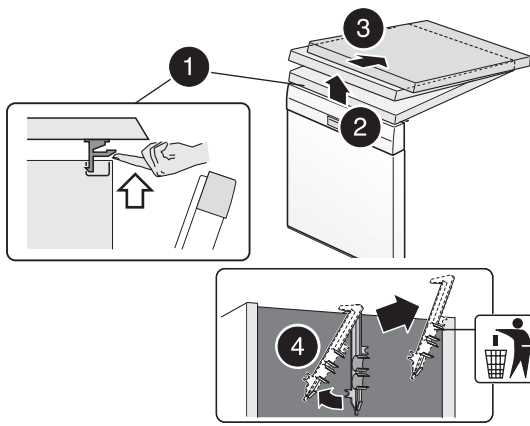


1

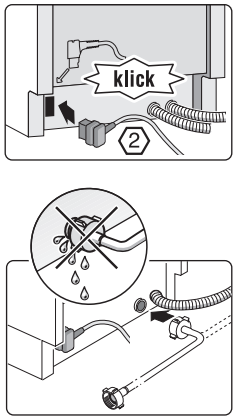


2

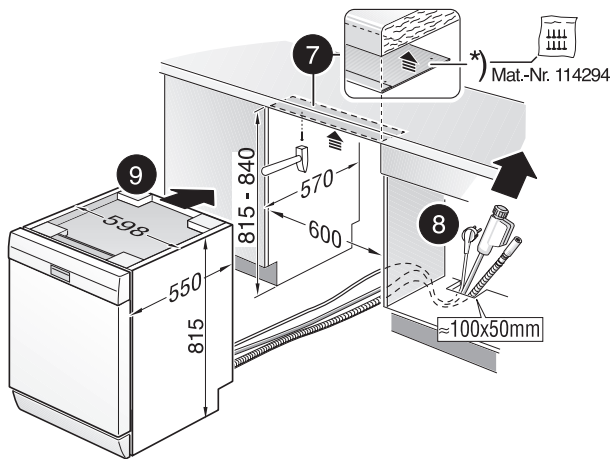


3

nicht einklemmen
do not pinch
ne pas coincer
No doblar


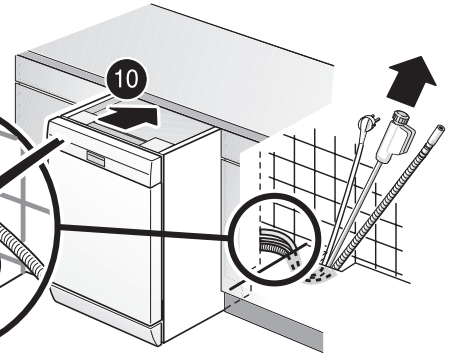


4

verspannen
brace
calar verticalment
Ajustar


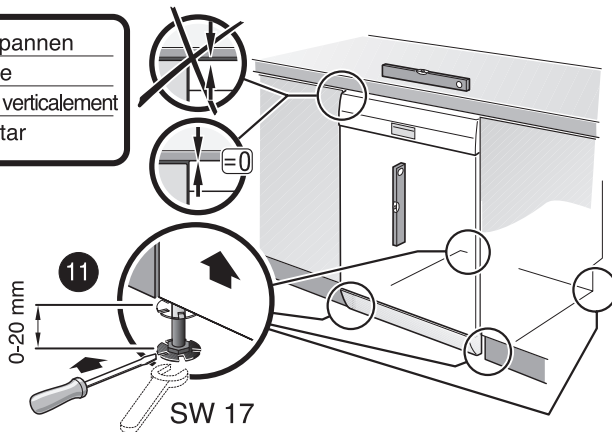


5

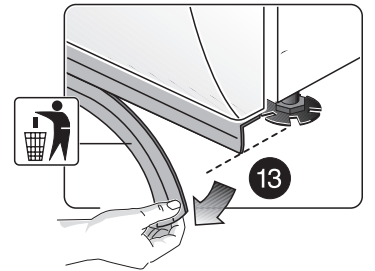



6

Scheibe entfernen
remove disc
enlever le disque
Eliminar disco




max. 10 Nm

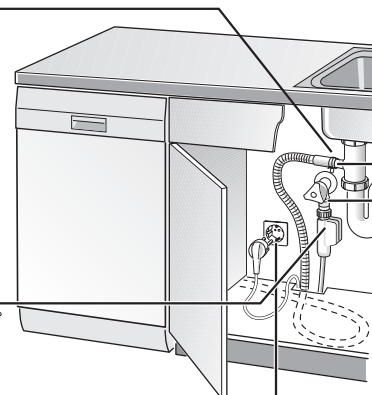

GB → → → GB


Ø 38 mm
min. 280 mm
max. 1,1 m



26,4 mm 20,9 mm
(G 3/4") (G 1/2")

DK
SE
NO
FI

0,05 - 1 MPa
(0,5 - 10 bar)
max. 60°C



Dichtheit nach einem Spülgang prüfen.
Check for leaks after one wash cycle.
Vérifiez l'étanchéité après un lavage.
Verificar la estanqueidad tras un ciclo de lavado.