



DEY21

X-Sign Player Box Pro



Edit, manage, and customise content through the **X-Sign Content Management** Software by using the 150+ templates available.



Remotely manage all screens, and display different contents across various locations. Monitor real-time performance, and get instant notifications about displays' status.



The DEY21 can be wired to the network (LAN) or via Wi-Fi, through the **360° adjustable antenna** for a strong and stable signal.


BenQ

SPECIFICATIONS

System	Processor	Dual Cortex-A72 + Quad Cortex-A53
	Graphics	Mali-T864
	Memory	4G
	Storage	32G
	Platform	Android 7.1
I/O	HDMI out	x1 (up to 4K@25Hz)
	USB	Type A (3.0 x 1, 2.0 x 3), Type C x 1 (video/data)
	LAN (Gigabit Ethernet)	x1
	TF slot (Micro SD)	x1
	Line in & Line out (3.5mm jack)	x1 (2 in 1)
	Antenna	x2
Wireless Connection		WiFi 802.11 ac/b/g/n + BT4.1
Codec	Video	H.264/AVC, Base/Main/High/High10 profile@level 5.1; up to 3840x2160@ 30fps; H.265/HEVC, Main/Main10 profile@level 5.1 High-tier; up to 3840x2160@ 60fps; VP9, profile 0, up to 3840x2160@ 60fps; MPEG-1 up to 1080P @ 60fps; MPEG-2 SP@ML, MP@HL, up to 1080P @ 60fps; MPEG-4 SP@L0-3, ASP@L0-5, up to 1080P @ 60fps; VC-1, SP@ML, MP@HL, AP@L0-3, up to 1080P @ 60fps
	Image	BMP/PNG/JPG up to 3840x2160
Power (adaptor)		12V DC in
Dimension (L x W x H)		28 mm x 128 mm x 30 mm
Environment	Operating temperature	-0°~45°
	Storage temperature	-20°~70°
Relative humidity		10%~95% (non-condensing)

→ Specifications are subject to change without notice. For the most up to date information, please visit benq.eu/en-eu/business.

INPUT/OUTPUT TERMINALS

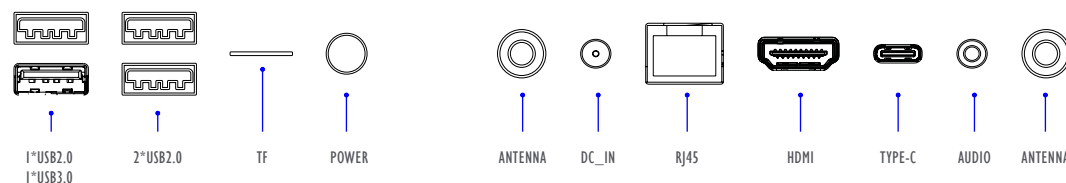

www.benq.eu/en-eu/business/index.html

© 2021 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.