

19in Universal Swivel VESA LCD Mounting Bracket for Server Racks

RKLCDBKT

DE: Bedienungsanleitung - de.startech.com

FR: Guide de l'utilisateur - fr.startech.com

ES: Guía del usuario - es.startech.com


IT: Guida per l'uso - it.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

Packaging Contents



- 1 x LCD Swivel bracket
- 1 x Rack Mounting back plate
- 4 x M5 Cabinet Screws
- 4 x M5 Cage Nuts
- 2 x M4 Screws
- 4 x LCD Mounting Screws
- 1 x Installation Guide

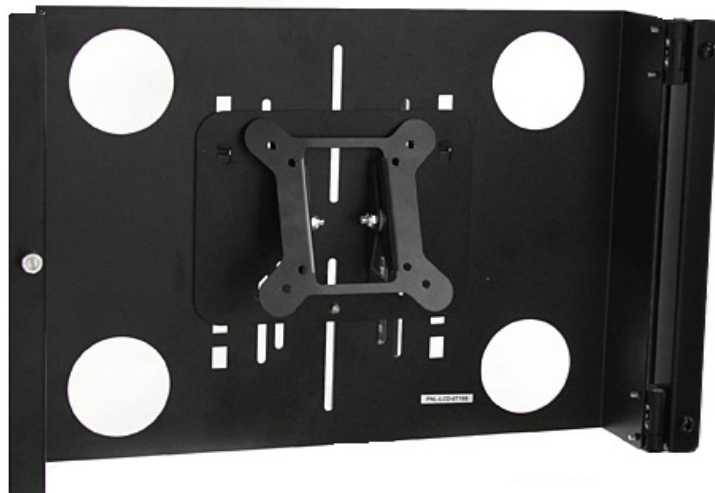


*actual product may vary from photos

Installation

1. Place the LCD monitor face-down, so the VESA MIS-D mounts are facing up.
2. Place the swivel mount on top of the LCD monitor, making sure the two hooks on the rear plate are towards the top of the LCD panel. Align the VESA mounting points on the monitor with the mounting points on the swivel mount and fasten with the provided LCD mounting screws.

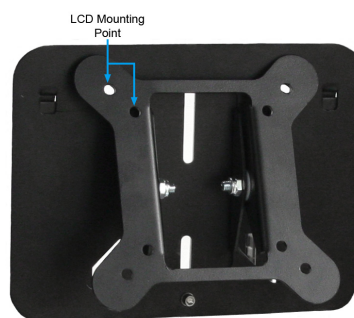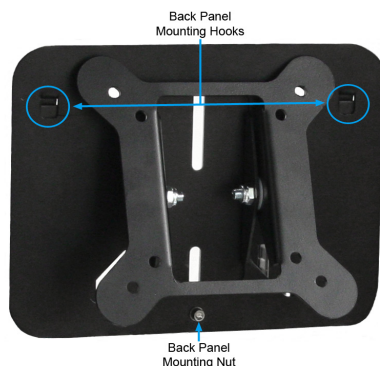

3. Mount the back plate into a 19" wide rack using the provided M5 cabinet screws and cage nuts. The hinged side has two mounting points and the locking screw on the other side requires the M5 cage nut.

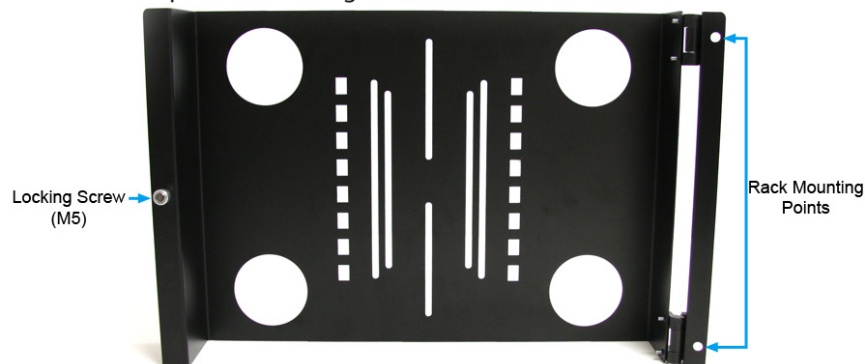

- Once the back plate is securely installed into the rack/cabinet, the hooks on the rear plate of the swivel mount should fit into the square holes on the back plate. An M4 nut is pre-installed at the bottom of the swivel mount, where the screw should be installed from the rear of the back plate to fasten them together.
- Connect any required video and power cables, which can be run through any of the 4 large cable openings in the back plate.

Specifications

Description	Universal Swivel VESA LCD Mounting Bracket for 19in Rack or Cabinet
Mounting Height	4U
Material	SPCC
Color	Black
Weight Capacity	16kg
Internal Width	425.45mm / 16.75in
Dimensions (WxHxD)	485.6mm x 311.0mm x 122.0mm
Net Weight	2.74kg
Standards	EIA-310D, MIS-D 75, MIS-D 100

*Compatible with 19" or smaller 4:3 monitors and 17" or smaller widescreen monitors.



FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty Information

This product is backed by a lifetime warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.