

### KVR133X72C2/256

#### 256MB 32M x 72-Bit PC133

#### CL2 ECC 168-Pin DIMM Module

#### DESCRIPTION:

This document describes ValueRAM's 32M x 72-bit (256MB) CL2 PC133 SDRAM (Synchronous DRAM) ECC DIMM module. The components on this module include nine 32M x 8-bit (8M x 8-bit x 4 Bank) PC133 SDRAM in TSOP packages. This 168-pin DIMM uses gold contact fingers and requires +3.3V. The electrical and mechanical specifications are as follows:

#### FEATURES:

|                          |                                                |
|--------------------------|------------------------------------------------|
| ✓ CLK Cycle Time (tCC)   | min. = 7.5ns (CAS Latency = 2) / max. = 1000ns |
| ✓ Row Cycle Time (tRC)   | 60ns                                           |
| ✓ CLK to Output (tSAC)   | max. = 5.4ns (CAS Latency = 2)                 |
| ✓ Single Power Supply of | +3.3V (+/- .3V)                                |
| ✓ Power                  | 2.970 W (operating)                            |
| ✓ UL Rating              | 94 V - 0                                       |

**Note:** The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.375" (34.92mm).

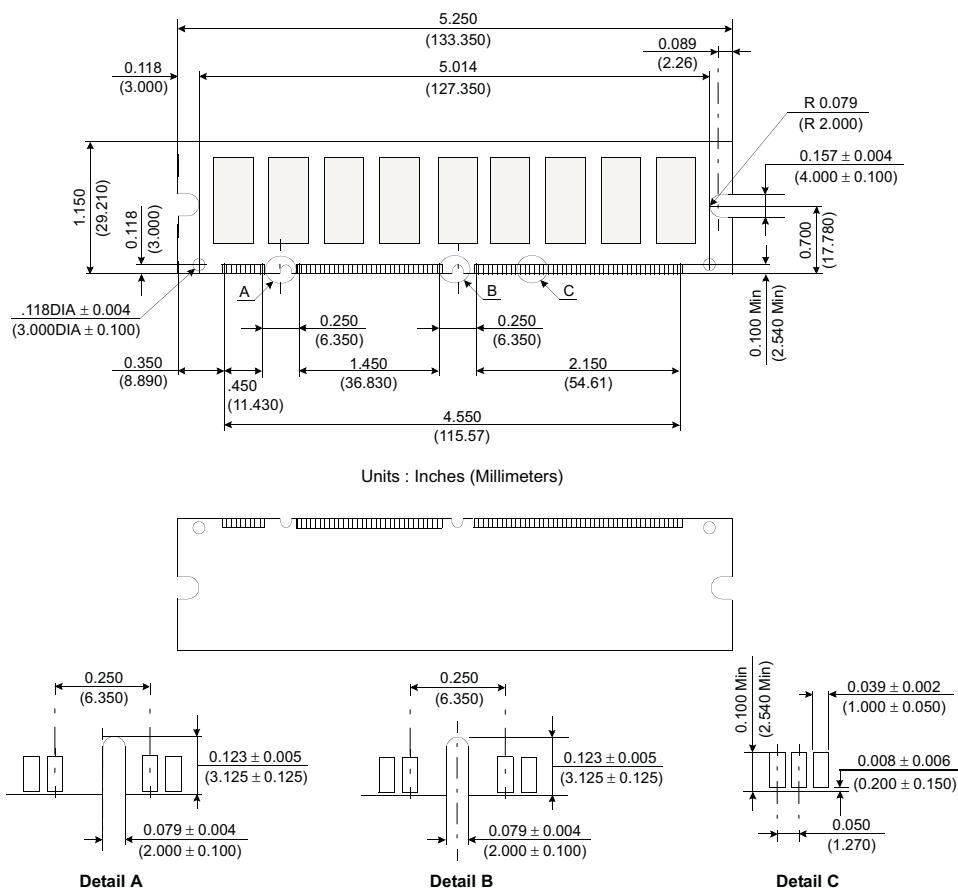


Figure 1: KVR133X72C2/256 168-Pin SDRAM Module