



Siemens
LC96KA540
Chimney hood

Predecessor:

Successor:

EAN code:
4242003535127

sales programme:
I21

LC96KA540 stainless steel

Chimney hood
Inclined design
90 cm wide

Variant:

Design:

Operating and power:


Environment and safety:

Comfort:


Measures:

- 90 cm Chimney hood
- Appliance colour: stainless steel
- Suitable for ducted or re-circulated extraction
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Wall mounted hood
- wall fixing system
- Innerframe
- electronic controls
- Push button controls with 7-segment display
- 3 speeds plus intensive setting
- Automatic revert setting
- light conception white/blue
- Twin channel high performance fan motor
- 3 x 20 W halogen lights
- Stainless steel filter covers, dishwasher safe
- Metal grease filter, dishwasher safe
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 430 m³/h
Intensive 650 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
Max. normal use: 55 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
Intensive: 64 dB(A) re 1 pW (50 dB(A) re 20 µPa sound pressure)
- Additional noise insulation
- Dimensions exhaust air (HxWxD): 865-1153 x 900 x 417 mm
- Dimensions recirculating (HxWxD): 865-1263 x 900 x 417 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Power rating: 270 W
- Special chimney solutions possible


Included accessories



Optional accessories



Alternative colors available



Technical Data


Characteristics

Color chimney : Stainless steel
Typology : Chimney
Approval certificates : CE, VDE
Length electrical supply cord (cm) : 130.0
Height of the chimney (mm) : 582-920/582-1030
Height of product, without chimney (mm) : 387
Dimensions of the product, with chimney (if exists) (mm) : 865-1263 x 900 x 417
Net weight (kg) : 28.00
Type of control : electronical
Number of speed settings : 3-stage + intensive
Maximum output air extraction (m3/h) : 430
Boost position output recirculating (m3/h) : 440
Maximum output recirculating air (m3/h) : 330
Boost position air extraction (m3/h) : 650
Number of lights : 3
Diameter of air outlet (mm) : 120 / 150
Grease filter material : Metal grease filter


Consumption and connection features

Connection Rating (W) : 270
Current (A) : 10
Voltage (V) : 220-240
Frequency (Hz) : 50
Plug type : Gardy plug w/ earthing
Installation typology : Wall-mounted



LC96KA540 stainless steel
Chimney hood
Inclined design
90 cm wide

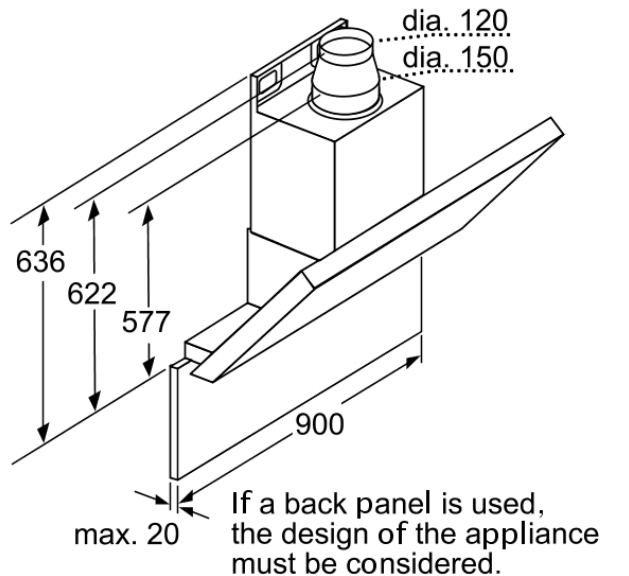


Measurements in mm

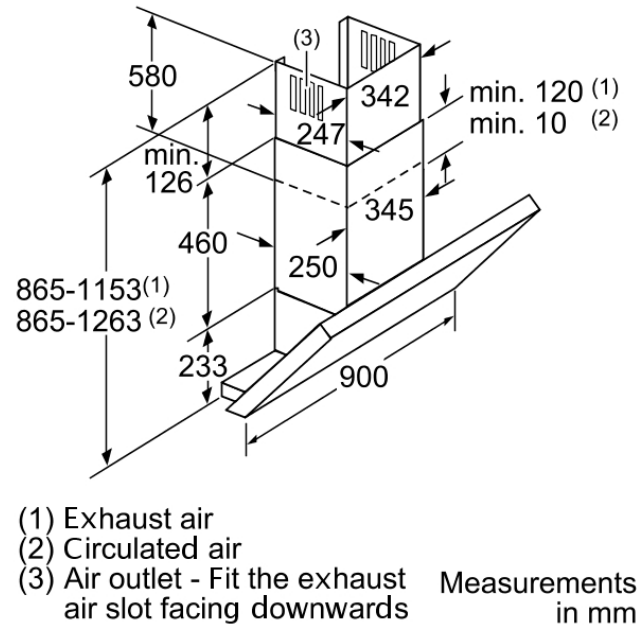

Measurements
in mm

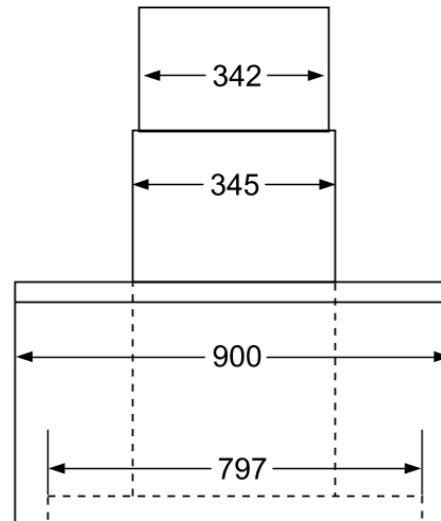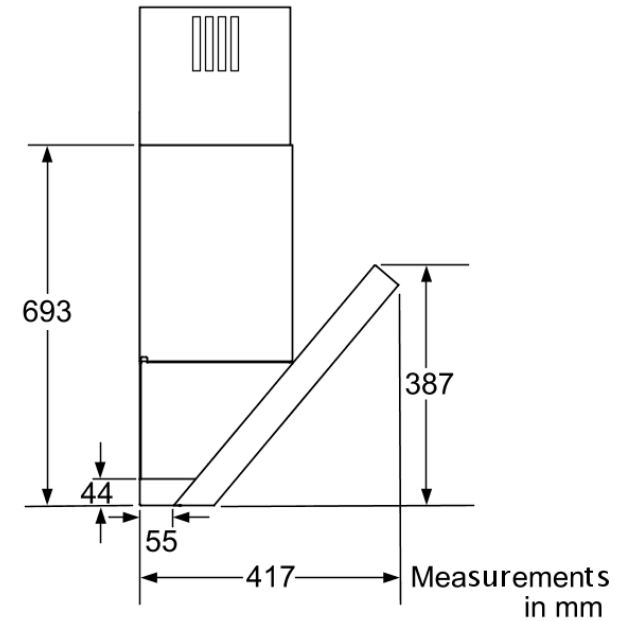

Measurements in mm

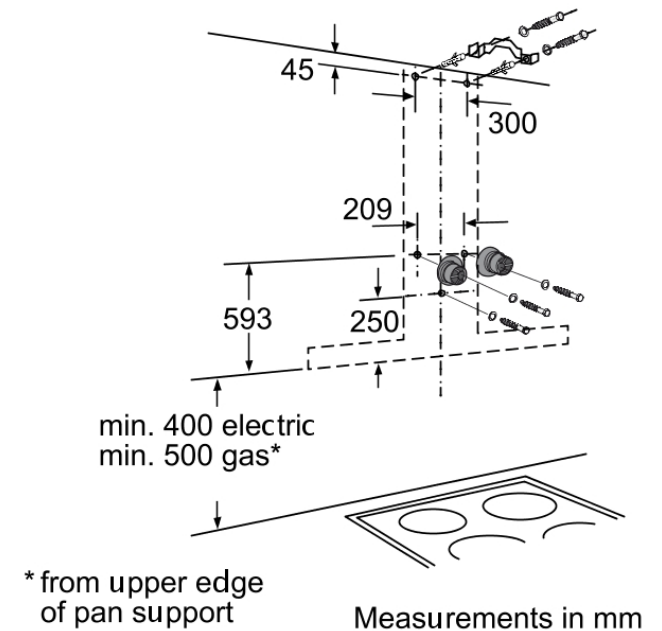

LC96KA540 stainless steel
Chimney hood
Inclined design
90 cm wide

