



Wiper Blades

Information Pack




Installation Advice

Aerotwin

Quick and easy installation with our Quick-Clip connector system


- 1** Open top bracket lock by pressing the sides of the clip and pulling up

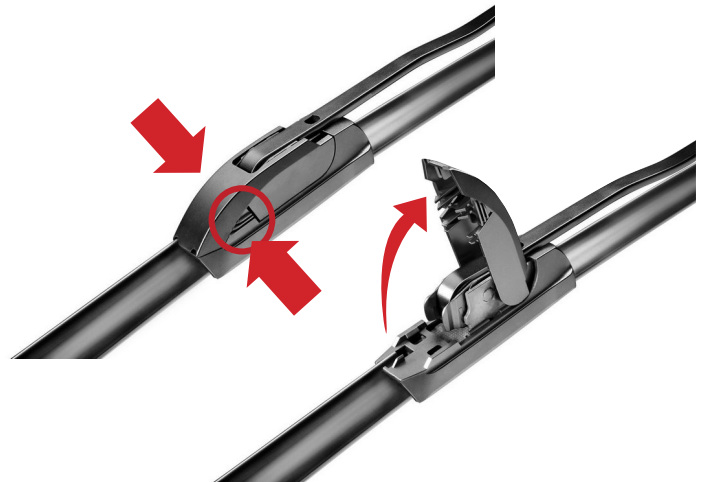

- 2** Insert the wiper arm through the bracket in the direction shown



- 3** Lock the hook on wiper arm into the Quick-Clip connector by sliding it back until it clicks into place

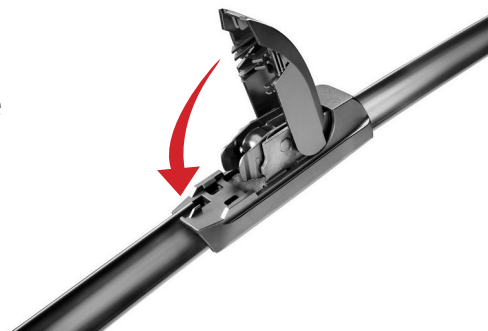

- 4** Close the top bracket



Installation Advice


Aerotwin Multi-Clip

Quick and easy installation with our Multi-Clip connector system

Adapter

Suitable for wiper arm

1				
2		19 mm 		
3				
4		16 mm 		

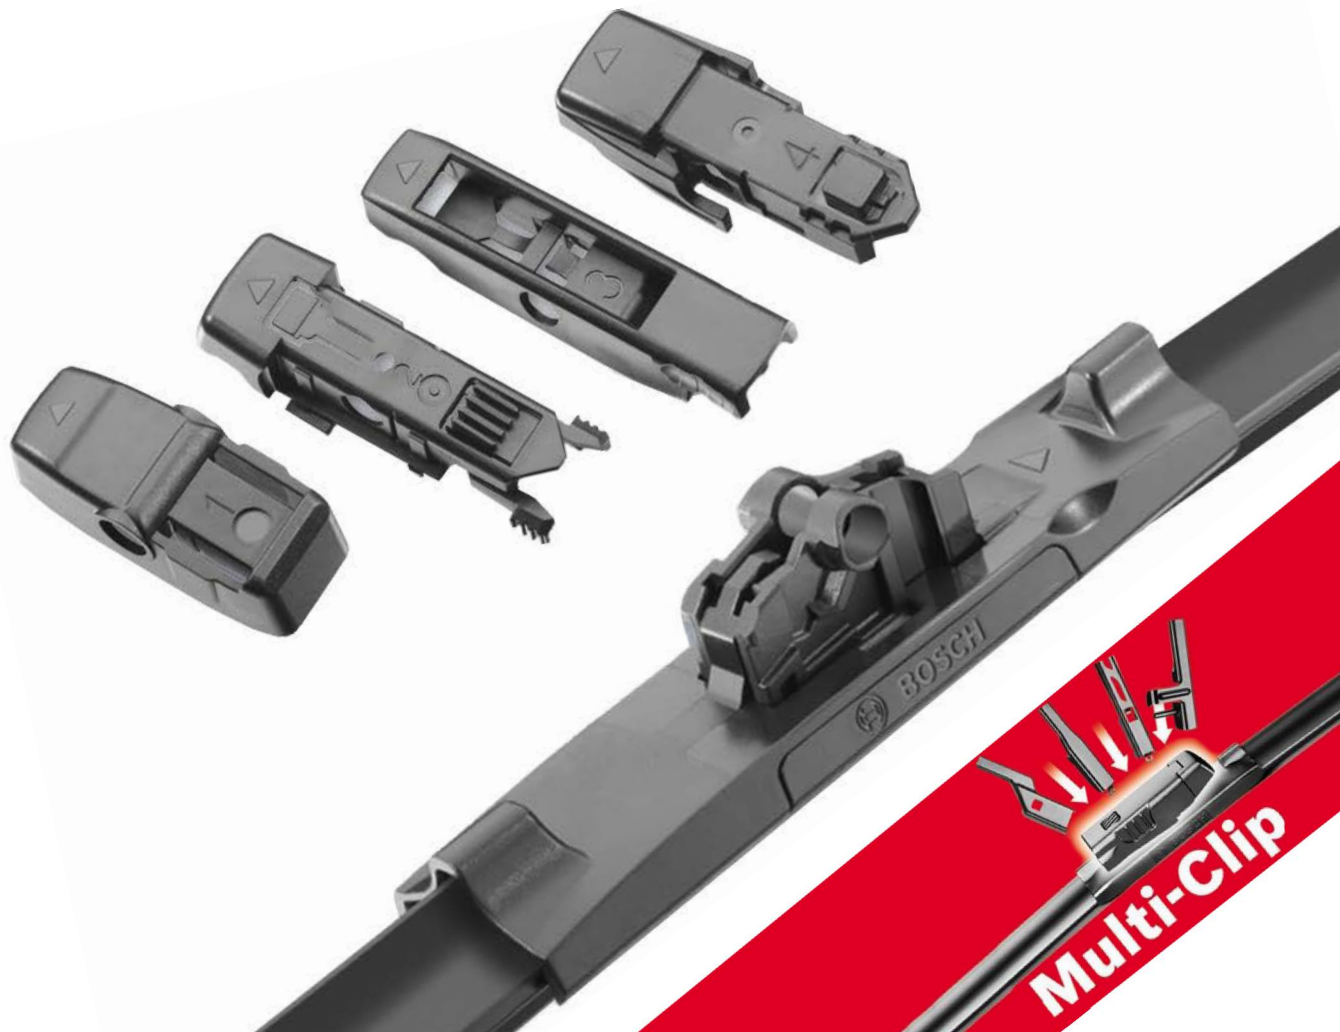

Installation Advice

Eco & MicroEdge

Quick and easy installation with our Quick-Clip connector system



1 Simply hook the wiper blade into the wiper arm



2 Pull the wiper blade into the wiper arm recess



3 Continue to apply pressure until the clip snaps into place



Technical Advice


Signs of a worn wiper blade



To obtain superior performance from wiper blades, Bosch's recommended replacement intervals of approximately 12 months. This can shorten dramatically if your car is consistently used in adverse conditions.



You can significantly increase the life of the wiper blades by cleaning the blade surface as part of there normal vehicle washing routine.



Stripes & Streaks

Cause: pollution, dirt and insects tearing the wiper rubber.




Unwiped Section

Cause: bent tension strip or deformed wiper blade due to long term resting in the parked position in high temperatures.



Rattle & Flutter

Cause: harsh environmental conditions, such as extended exposure to UV rays, damage the wiper rubber's chemical structure causing it to harden and catch on the vehicle glass.



Cross Beam

Cause: corrosion and excessive free-play in wiper frame assembly due to general mechanical wear or extended use in adverse conditions.

