


RoHS Compliant

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/05/08	

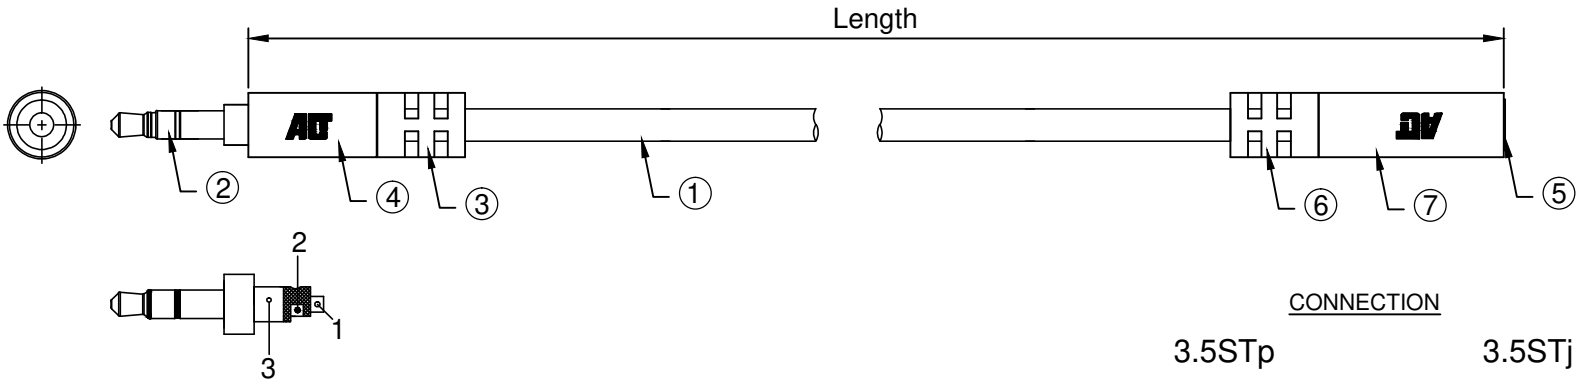

Item No.	Length(m)
AK6250	2.0m
AK6252	3.0m
AK6254	5.0m
AK6256	10.0m

CONNECTION


3.5STp	3.5STj
1	White
2	Red
3	Drain Wire

Remark:

- 1.100% Open/Short Test
- 2.Conductive Resistance:2ohms MAX
- 3.Insulation Resistance:10M ohm MIN.
- 4.The product is Reach/RoHS compliant.

- A)Conductor 7/0.12OFC
 - B)Insulation HDPE 0.9mm(Red/White)
 - C)Al Foil 8mm
 - D)Drain wire 7/0.12BC
 - E)Braiding 80/0.10CCS
 - F)Jacket OD:4.0±0.15mm Black PVC,110P
- Cable Spec.

⑦	Shell	Copper shell, Black	1PC	
⑥	External Mold	Outer Mould 30P PVC, Black	1PC	
⑤	Connector	3.5 Stereo Female, Gold-Plated	1PC	
④	Shell	Copper shell, Black	1PC	
③	External Mold	Outer Mould 30P PVC, Black	1PC	
②	Connector	3.5 Stereo Male, Gold-Plated	1PC	
①	Cable	(7/0.12mmOFC+PE)*2C+AL+80/0.10CCS+PVC 110P OD:4.0mm,Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK


TOLERANCES UNLESS OTHERWISE STATED
X. = ± 1
.X = ± 0.2
.XX = ± 0.1

			
ERP NO.:		SAMPLE DWG NO:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
3.5mm Stereo Male to Stereo Female		DATE	2018/05/08
APPROVAL		CHECKED	
		DRAWN	