

# PHILIPS

Stylish LED light

Ultinon Pro3100 SI


Type of lamp: W21/5W

12 V, white light effect

Advanced automotive system

2 year warranty

11066CU31B2

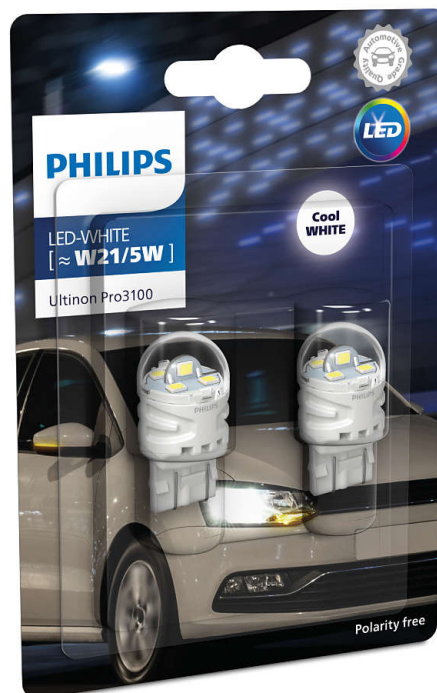

## Stand out from the crowd

### Durable and vibrant LED signalling

For a stylish drive, upgrade to Philips Ultinon Pro3100 LED [~P21/5W] stop and tail lights. They are bright, intense red and look good so you can signal safely and stylishly.

#### **Superior visibility for safer driving**

- Instant safety information for other drivers

#### **Long-lasting performance**

- Durable, long-lasting LED lighting

#### **Simple plug-and-play replacement**

- Easy to install and compatible with most vehicles
- Easy to install on your vehicle

#### **Bright LED lights**

- Signal your intent with brighter exterior lighting

#### **Good light distribution**

- Optimised for enhanced visibility

## Highlights

### Bright and vibrant signals

Signalling the intended movement of your vehicle is vital to your safety. To avoid collisions, other people need to know what you're doing, whether it's reversing, manoeuvring, turning or stopping. And when poor weather reduces visibility, bright and vibrant signalling is even more crucial. Philips Ultinon Pro3100 signalling lights give you the performance you need, allowing other drivers vital extra time to react. Upgrade your exterior lighting to a more intense red. Your vehicle says a lot about you, so make a style statement with Philips LED exterior signalling lights.

### Good light distribution

The Philips Ultinon Pro3000 LED exterior lighting range is designed for smarter light distribution to project exterior signalling light where you need it (whether that's reversing, stopping or signalling). With wide-angle, uniform light, not only can you see more of the road, but other drivers can also see more of you.

### Long-lasting LED lighting

You want bright and stylish lights, but you don't want to keep replacing failed lamps. That's a major weakness of conventional signalling lights

- the more powerful the light, the shorter its lifespan. At the same light intensity, LEDs last much longer. Philips Ultinon Pro3100 LED lights are extremely durable with their lifetime of 3,000 hours which is up to twice the lifespan of conventional W21/5W signalling bulbs (Philips W21/5W 12V). Replacing your conventional W21/5W with Philips Ultinon Pro3100 LED lights will avoid multiple replacements in the future to save you money and time.

### Ready, steady, installed!

Enjoy the plug-and-play experience: the Philips Ultinon Pro3100 comes with standard caps so replacement is easy and quick.

### Polarity-free design

Enjoy the plug-and-play experience: the Philips Ultinon Pro3100 comes with polarity-free design, so you don't need to worry about the polarity during installation. It will save you time and make installation easier.

### Instant-on technology

Compared to incandescent lamps, Philips Ultinon Pro3100 LEDs light up instantly to ensure that other drivers can react faster, keeping you safer.

## Specifications

### Marketing specifications

**Expected benefits:** Transform your lights

**Product highlight:** High brightness, Polarity-free, Easy to install

### Product description

**Application:** Stop light and rear position/parking lights

**Base:** W3x16q

**Designation:** LED-White [~W21/5W]

**ECE certification:** NO

**Range:** Ultinon Pro3100

**Technology:** LED

**Type:** LED-WHITE [~W21/5W]

### Lifetime

**Life time:** 3000 hrs

### Light characteristics

**Lumens:** 200/50

**Color temperature:** 6000 K

### Electrical characteristics

**Wattage:** 2.4/0.48 W

**Voltage:** 12 V

### Ordering information

**Order entry:** 11066CU31B2

**Ordering code:** 02208030

### Packaging Data

**EAN1:** 8719018022080

**EAN3:** 8719018022097

**Packaging type:** B2

### Packed product information

**Length:** 9.5 cm

**Width:** 1.5 cm

**Height:** 13.5 cm

**Pack Quantity:** 2

**MOQ (for professionals):** 10

### Outerpack information

**Length:** 14.2 cm

**Width:** 12.1 cm

**Height:** 10.3 cm

**Gross weight per piece:** 0.49 kg

