

KVR400D2N3K2/512

512MB (256MB 32M x 64-Bit x 2 pcs.)

DDR2-400 CL3 240-Pin DIMM Kit

DESCRIPTION:

ValueRAM's KVR400D2N3K2/512 is a kit of two 32M x 64-bit (256MB) DDR2-400 CL3 SDRAM (Synchronous **DRAM**) memory modules. Total kit capacity is 512MB. The components on each module include four 32M x 16-bit (8M x 16-bit x 4 Bank) DDR2-400 SDRAM in FBGA packages. Each 240-pin DIMM uses gold contact fingers and requires +1.8V. The electrical and mechanical specifications are as follows:

FEATURES:

✓ Clock Cycle Time (tCK) CL=3	5ns (min.) / 8ns (max.)
✓ Row Cycle Time (tRC)	55ns (min.)
✓ Refresh to Active/Refresh Command Time (tRFC)	75ns
✓ Row Active Time (tRAS)	40ns (min.) / 70,000ns (max.)
✓ Single Power Supply of	+1.8V (+/- .1V)
✓ Power	0.828 W (operating per module)
✓ UL Rating	94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

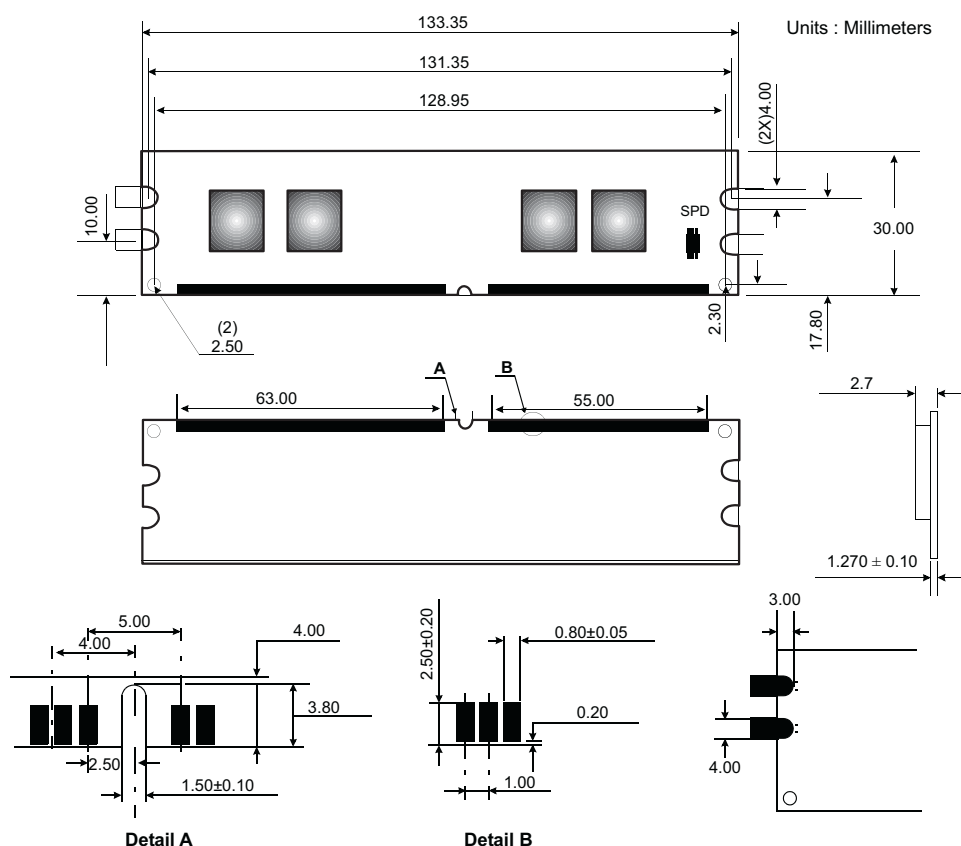


Figure 1: KVR400D2N3K2/512 240-Pin DIMM