




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ZONG INTERNATIONAL LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ZONG INTERNATIONAL LTD.


RoHS Complianta

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/04/16	

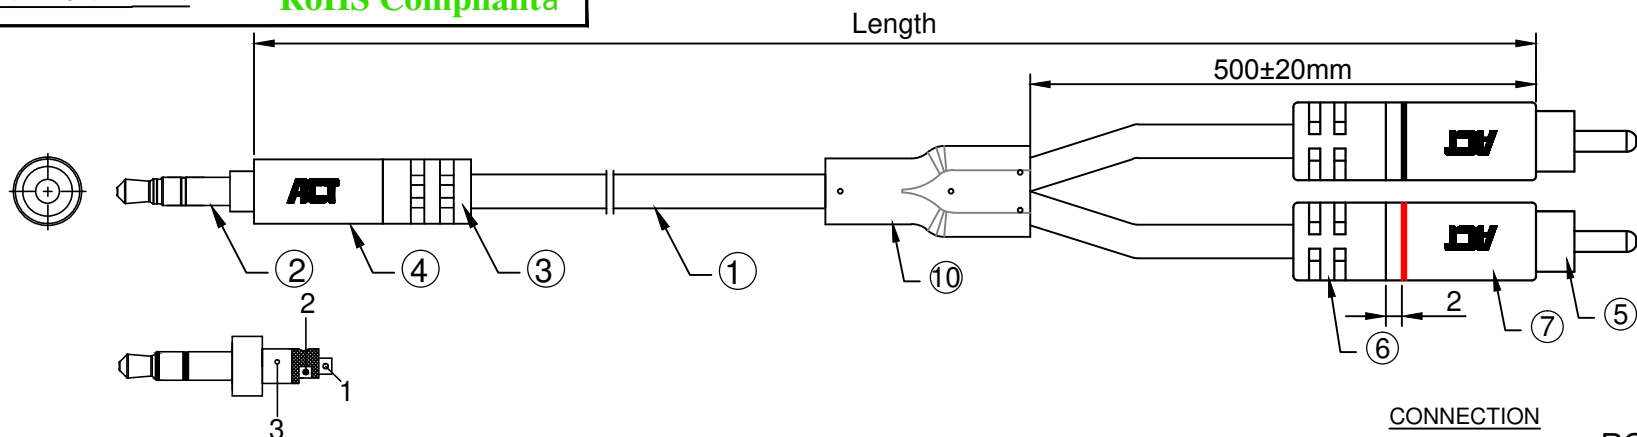

- Cable Spec.
- A) Conductor 7/0.12OFC
 - B) Insulation HDPE 0.9mm(Red/White)
 - C) Al Foil 8mm
 - D) Drain wire 7/0.12BC
 - E) Braiding 80/0.10CCS
 - F) Jacket OD:4.0±0.15mm Black PVC,110P


Item No.	Length(m)
AK6230	2.0m
AK6232	3.0m
AK6234	5.0m
AK6236	10.0m

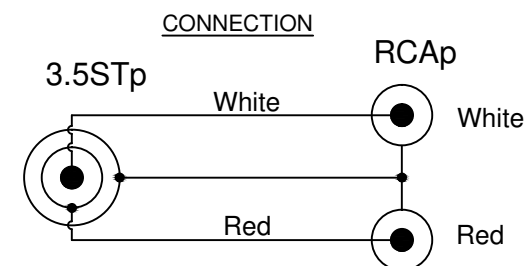

Remark:

- 1.100% Open/Short Test
2. Conductive Resistance:2ohms MAX
3. Insulation Resistance:10M ohm MIN.
4. The product is Reach/RoHS compliant.

⑧		Strain Relief,PVC	1PC	
⑦	Shell	Copper shell, Black, Red/White Ring, White Logo	2PCS	
⑥	External Mold	Outer Mould 30P PVC, Black	2PCS	
⑤	Connector	RCA Male, Gold-Plated	2PCS	
④	Shell	Copper shell, Black	1PC	
③	External Mold	Outer Mould 30P PVC,Black	1PC	
②	Connector	3.5 Stereo Male, Gold-Plated	1PC	
①	Cable	(7/0.12mmOFC+PE)*2C+AL+80/0.10CCS+PVC 110P OD:4.0mm,Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ZONG

ZONG Cable Technology Co., Ltd.
中广视讯线缆技术有限公司

ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	3.5mm Stereo Male to 2xRCA Male,Black		PAGE NO 1/1
APPROVAL		CHECKED	
		DRAWN	
		DATE	2019/04/16