

KVR100X64SC2L/128 128MB PC100 144-Pin SDRAM SODIMM Memory Module

DESCRIPTION:

This document describes ValueRAM's CL2 16M x 64-bit (128MB) SDRAM (Synchronous DRAM) PC100 Small Outline DIMM memory module. The components on this module include eight 8M x 16-bit (2M x 16-bit x 4 Bank / PC100 components) 4K Refresh SDRAM in TSOP packages. This 144-pin SODIMM uses gold contact fingers and requires +3.3V. The electrical and mechanical specifications are as follows:

FEATURES:

✓ CLK Cycle Time (tCC)	min. = 10ns (CAS Latency = 2 / max. = 1000ns)
✓ Row Cycle Time (tRC)	70ns
✓ CLK to Output (tSAC)	max. = 6ns (CAS Latency = 2)
✓ Single Power Supply of	+3.3V (+/- .3V)
✓ Power	2.244 W (operating)
✓ UL Rating	94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

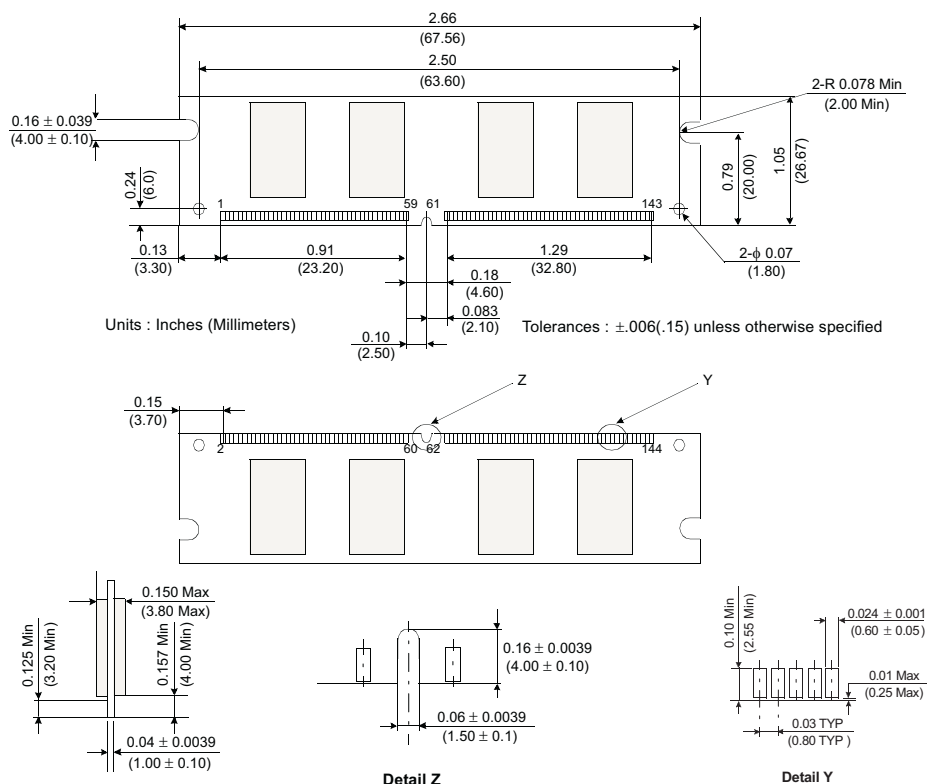


Figure 1: KVR100X64SC2L/128 128MB 144-Pin SDRAM Module