

KVR133X64C3SS/256

SDRAM 168-Pin PC133

DIMM Memory Module

DESCRIPTION:

ValueRAM's KVR133X64C3SS/256 is an 32M x 64-bit (256MB), CAS Latency 3 (CL3) SDRAM (Synchronous DRAM) PC133, single sided, memory module. The components on this module include eight 32M x 8-bit (8M x 8-bit x 4 Bank / PC133 components) SDRAM in TSOP packages. This 168-pin DIMM uses gold contact fingers and requires +3.3V. The electrical and mechanical specifications are as follows:

FEATURES:

- | | |
|-----------------------------|--|
| ✓ CLK Cycle Time (tCC) | min. = 7.5ns (CAS Latency = 3) / max. = 1000ns |
| ✓ Row Cycle Time (tRC) | 65ns |
| ✓ CLK to Output (tSAC) | max. = 5.4ns (CAS Latency = 3) |
| ✓ Single Power Supply of | +3.3V (+/- .3V) |
| ✓ Current (One Bank Active) | 1,080 mA (operating) |
| ✓ UL Rating | 94 V - 0 |

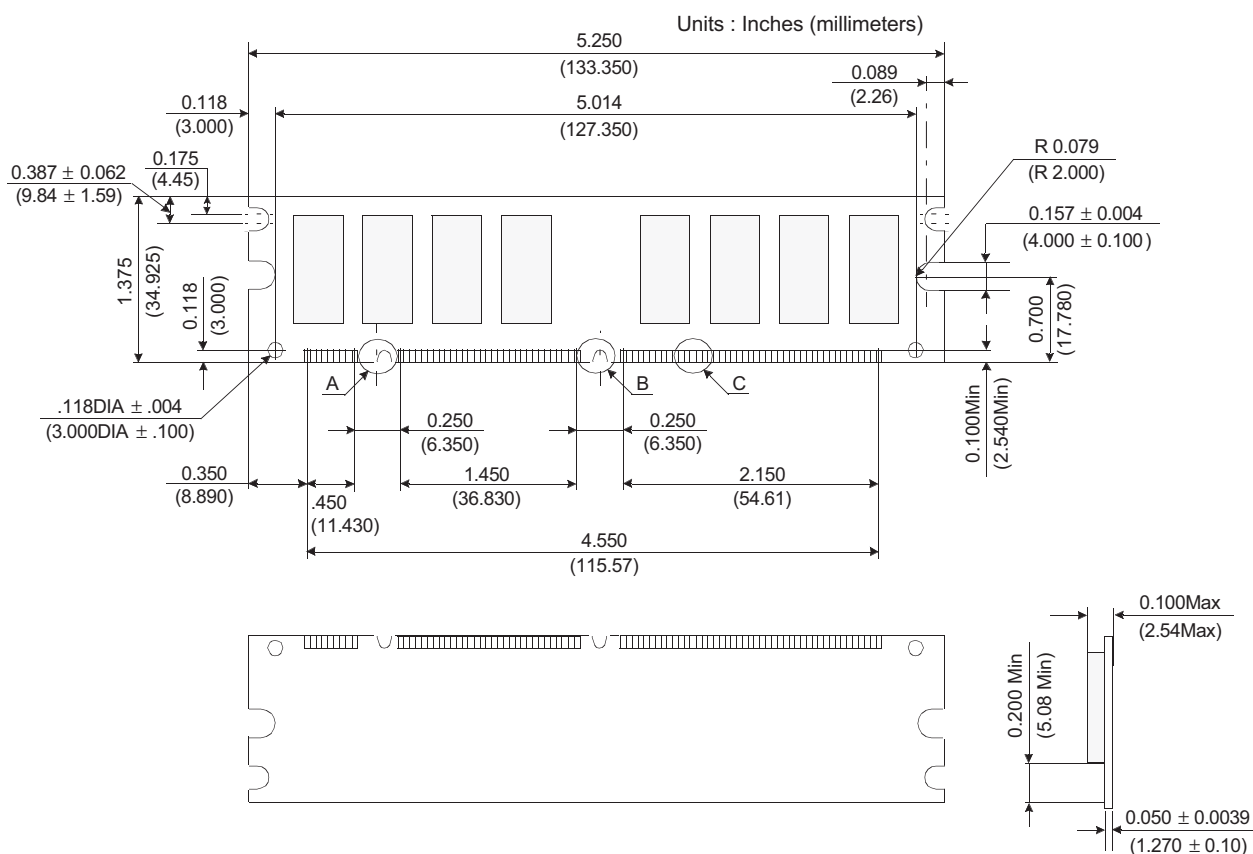


Figure 1: KVR133X64C3SS/256 168-Pin SDRAM Module