



| LTR | REV. | DESCRIPTION                        | DATE     |
|-----|------|------------------------------------|----------|
| ⚠*4 | III  | EDIT TOOLING, TEST<br>& ADD SHIELD | 10/23/05 |

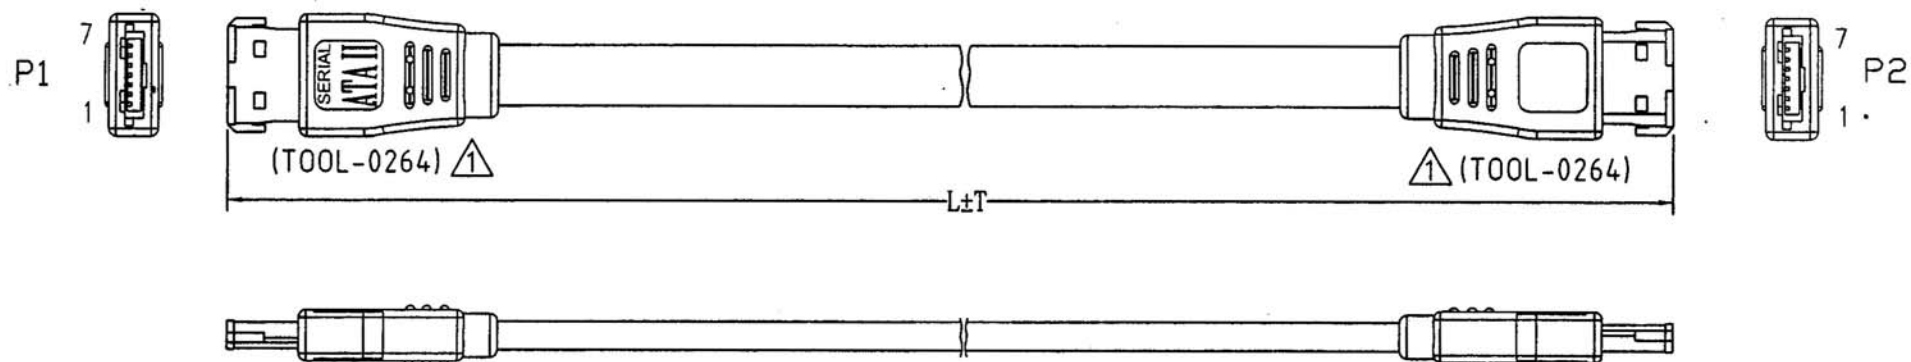

#### NOTE:

- 1.CABLE:UL2725 [26AWG(1/0.404)×2F INS:HD-PE ID:1.3×2.7+DRAIN WIRE  
28AWG(1/0.32)×2C+AL/MY]×2C INNER JACKET:PVC OD:7.3×2.1mm  
+AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK(NK-K01),  
OD:9.0×4.0mm, IMPEDANCE: 100 OHM.
- 2.CONNECTOR:  
P1&P2:SATA II 7P RIVETING TYPE PBT BLACK G/F W/METAL SHELL
- 3.SHIELD:COPPER-FOIL ⚠
- 4.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
- 5.TEST REQUEST:  
100% OPEN SHORT MIS WIRE TEST  
CONTACT RESISTANCE 3 ohm MAX.  
INSULATION RESISTANCE 10M ohm MIN. ⚠  
HI-POT DC300V/0.01SEC.
- 6.PACKING:EACH PC / POLYBAG

#### PIN ASSIGNMENT

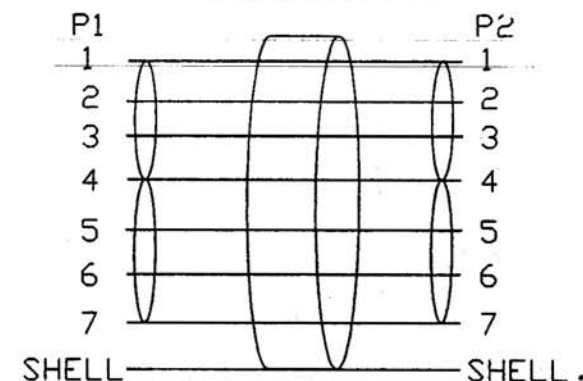

| Tolerance | Inch | M/M |
|-----------|------|-----|
| .X        | .015 | .30 |
| .XX       | .010 | .10 |
| .XXX      | .005 | .05 |



111821 SATA II cable extern, 1,0m  
111822 SATA II cable extern, 2,0m