

CS62D


2-Port PS/2 DVI KVM Switch with Audio

The CS62D takes a giant step forward from prior models in the Petite series, by offering DVI functionality – allowing you to keep up with the latest innovations in computer video. The advantage of DVI is that it eliminates the problem of image distortion due to signal conversion found in analog video – resulting in a clearer, sharper, image.

Another new feature in the CS62D, is the implementation of a remote selection switch – so that you can control port switching from the desktop while the switch, itself, can be placed in a convenient, out of the way, location.



Diagram

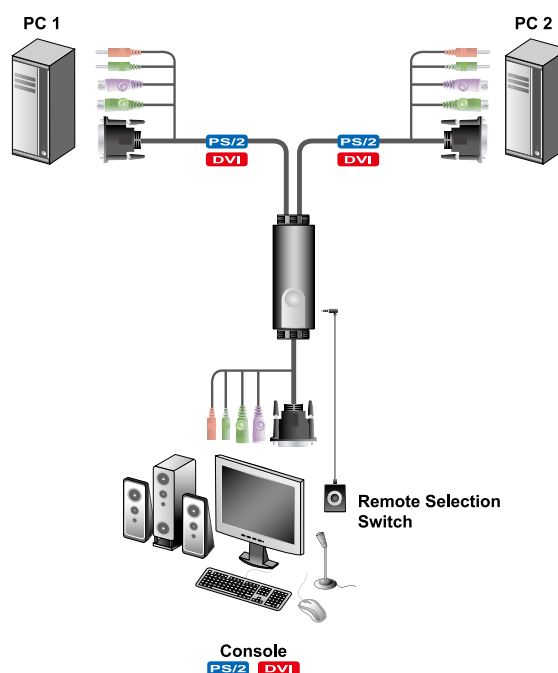

Features

- One DVI video console controls two PS/2 computers
- Fully DVI-Digital specification compliant
- Remote port selection switch for convenient switch placement
- Compact design, built in all-in-one cables (console 1.2 m; computers 0.6 m, 1.2 m)
- Audio (microphone and speaker) enabled – full bass response provides a rich experience for 2.1 surround sound systems
- Independent switching of the KVM and Audio focus – one computer can have the KVM focus while the other has the audio focus
- Superior video quality – up to 1920 x 1200 @ 60Hz; DDC2B
- Auto Scan function to monitor computer operation
- HDCP compliant
- Non-powered

Specifications

Function			CS62D
Computer Connections			2
Port Selection			Hotkey, Pushbutton
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x DVI Male (Black)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
		Speaker	1 x Mini Stereo Jack Female (Green)
		Microphone	1 x Mini Stereo Jack Female (Pink)
	KVM Ports	Keyboard	2 x 6-pin Mini-DIN Male (Purple)
		Video	2 x DVI Male (Black)
		Mouse	2 x 6-pin Mini-DIN Male (Green)
		Speaker	2 x Mini Stereo Plug Male (Green)
		Microphone	2 x Mini Stereo Plug Male (Pink)
	Remote Switch		1 x Mini Stereo Jack
Switches	Port		1 x Pushbutton
LEDs	Selected		2 (Green)
Cable Length	Console	KB/Mouse	0.15m
		Video	1.2m
	Computers		0.6m, 1.2m
Emulation	Keyboard/Mouse		PS/2
Video			1920 x 1200@60Hz; DDC2B
Scan Interval			3, 5, 10, 20 Seconds
Environment	Operation Temp.		0-50°C
	Storage Temp.		-20-60°C
	Humidity		0 - 80% RH, Non-condensing
Physical Properties	Housing		Plastic
	Weight		0.62 kg
	Dimension (L x W x H)		8.45 x 3.40 x 2.13 cm

* The specifications and pictures are subject to change without notice.