

SS560F
SS560M



Display size
32"-75"



Max load
150lb (68.2kg)
display
10lb (4.55kg)
per shelf

SMARTMOUNT®

Flat Panel Floor Stand

FOR 32" TO 75" DISPLAYS

The SS560F/M SmartMount® Flat Panel Floor Stand are designed to provide the ideal display viewing placement and match the décor of any environment. Ideal for boardrooms, training rooms, lobbies, classrooms, auditoriums, or exhibit halls with a full line-up of accessories offering tailor-able functionality to meet your specific requirements. Internal cable management hides the AV cabling, showing a clean, clutter-free look.

Peerless-AV's Flat Panel Stand with continuous vertical adjustment, makes finding the perfect viewing height simply effortless.



Additional Features

- ✓ Display and component shelf can be located anywhere along the column for perfect component placement and viewing height (up to 60" at center)
- ✓ Integrated cable management protects, contains and conceals cables for a clean, professional installation
- ✓ Wide base provides safety by preventing accidental tipping
- ✓ Textured black powder coat finish helps hide finger prints and dust
- ✓ Open frame display adaptor helps prevent display input interference
- ✓ 5 degrees of negative adjustment keeps even the heaviest of displays level
- ✓ Universal display adaptor fits mounting patterns from 200 x 200mm to 600 x 400mm and allows mounting in landscape or portrait orientation

PLUMB ADJUSTMENT

5 degrees of negative adjustment keeps even the heaviest of displays level

OPEN FRAME ADAPTOR

Helps prevent display input interference

UL/CUL CERTIFIED

Provides the highest level of safety

VERTICAL ADJUSTMENT


Display and component shelf can be located anywhere along the column (up to 60" at center)

COMPONENT PLACEMENT

Component shelf can be located anywhere along the column

SAFE AND STURDY

Wide flat base provides safety by preventing accidental tipping

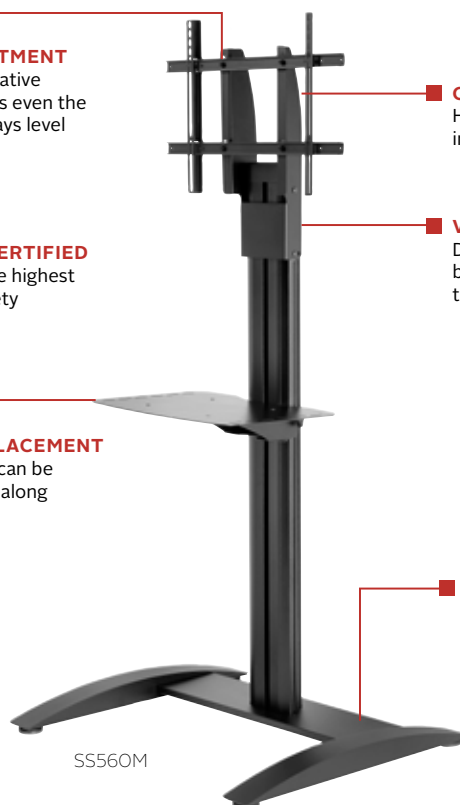

SS560M



SS560F



Cable management allows cables to enter or exit anywhere along the column



RoHS



Model Numbers

WARRANTY: Limited 5-year

SS560F	SmartMount® Flat Panel Floor Stand for 32" to 75" Displays without Shelf
SS560M	SmartMount® Flat Panel Floor Stand for 32" to 75" Displays with Metal Shelf

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SS560F/ SS560M	35.00" x 65.83" x 29.00" (889 x 1672 x 737mm)	SS560F: 54lb (24.54kg) SS560M: 65lb (29.55kg)	150lb (68.2kg) display 10lb (4.55kg) per shelf	Textured Powder Coat	Black







Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SS560F/ SS560M	47.50" x 38.50" x 7.25" (1207 x 978 x 184mm)	SS560F: 69.0lb (31.36kg) SS560M: 80.0lb (36.36kg)	SS560F: 735029279853 SS560M: 735029277330	Base, aluminum column, universal display adaptor, metal component shelf (with SS560M), hardware & instructions	1

Accessories

ACC316:	Safety Belt	ACC-MS:	Metal Shelf
ACC-GS1:	Glass Shelf	ACC-VCS:	Video Conferencing Camera Shelf
ACC-LA:	Laptop Arm	DSX750:	Media Player Storage

All dimensions = inch (mm)

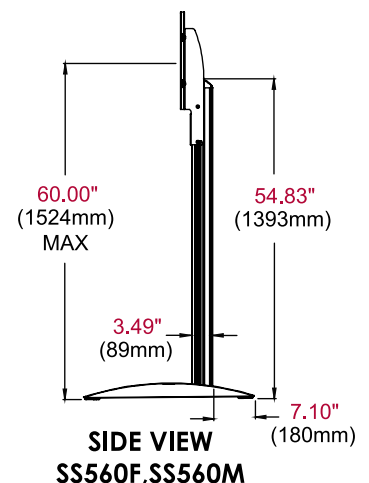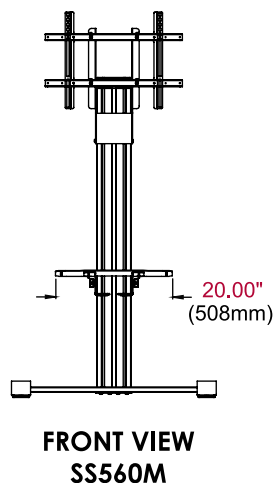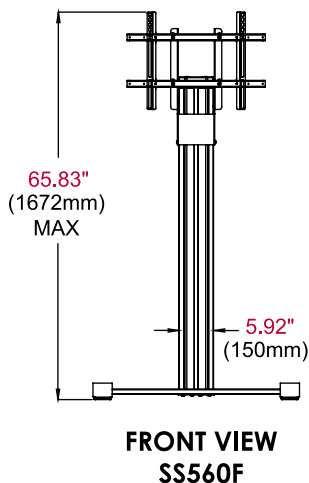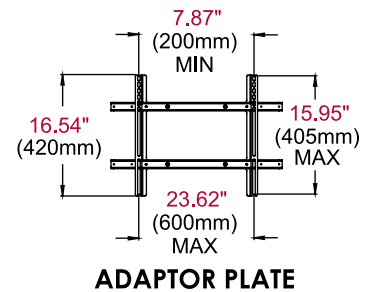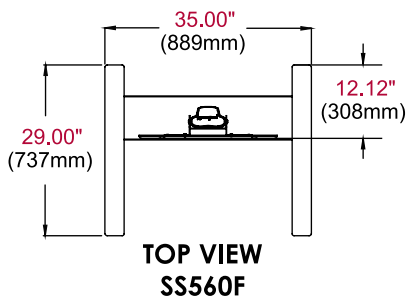

Architect Specifications

The SmartMount® Flat Panel Floor Stand shall be a Peerless-AV model SS560F/M and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-AV®

LIT-1296 rev.1