

CS228



- Multi-console 8-Port PS/2 KVM Switch
- CS228 is a high-efficiency KVM switch which provides the most efficient solution. Its console with 2 built-in PS/2 allows users to control 8 servers either alone or by sharing. The built-in DB-25 of CS228 can reduce cable derangements in component rooms and can enhance signal quality and operation efficiency.



Features


- 2 PS/2 console control 8 computers.
- Up to four users can operate up to 64 computers (via cascade to CS88A and CS9138*) at the same time.
- Each console has its own access control
- Two-level (Administrator/User) password authorization for enhanced security protection.
- Administrator can access any computer completely independently of the other users.
- Each user has his own access control list
- Computer selection via On Screen Display (OSD)
- Supports Microsoft IntelliMouse, Logitech MouseMan, FirstMouse, IBM Scrollpoint Mouse.
- OSD automatically adjusts to resolution changes.
- Auto Scan function to monitor computer operation.
- With speaker and microphone support.
- Superior video quality: Up to 1920 x 1440; DDC2B.
- Special design for easy stacking.
- Rack mountable in 19" (1U) system rack.
- * CS88A and CS9138 do not support audio enabled KVM switches.
- Multiplatform support: Windows 2000/XP/[Vista](#), Linux and FreeBSD.

- For more information about KVMs which can connect to CS228, see [Compatible KVM Table](#).

Specification

Computer Connections		Direct	8
		Max.	64 (via Cascade to CS88A and CS9138)
Port Selection			OSD
Connectors	Console Ports (1,2)	Keyboard	2 x 6-pin Mini-DIN Female (Purple)
		Video	2 x HDB-15 Female (Blue)
		Mouse	2 x 6-pin Mini-DIN Female (Green)
		Speaker	2 x Mini Stereo Jack Female (Black)
		Microphone	2 x Mini Stereo Jack Female (Pink)
	KVM Ports	Keyboard/ Mouse/ Video	8 x DB-25 Female (Black)
		Speaker	
		Microphone	
	LEDs	Selected	
Power		1 (Blue)	
Emulation	Keyboard / Mouse		PS/2
Video			1920 x 1440; DDC2B
Scan Interval			3,5,10,15,20,30,40,60 Seconds
Power Consumption			DC9V, 6.3W
Environment	Operating Temp.		0-50°C
	Storage Temp.		-20-60°C
	Humidity		0-80% RH, Non-condensing
Physical Properties	Housing		Metal
	Weight		2.70 kg
	Dimensions (L x W x H)		45.00 x17.00 x 6.70 cm

Diagram

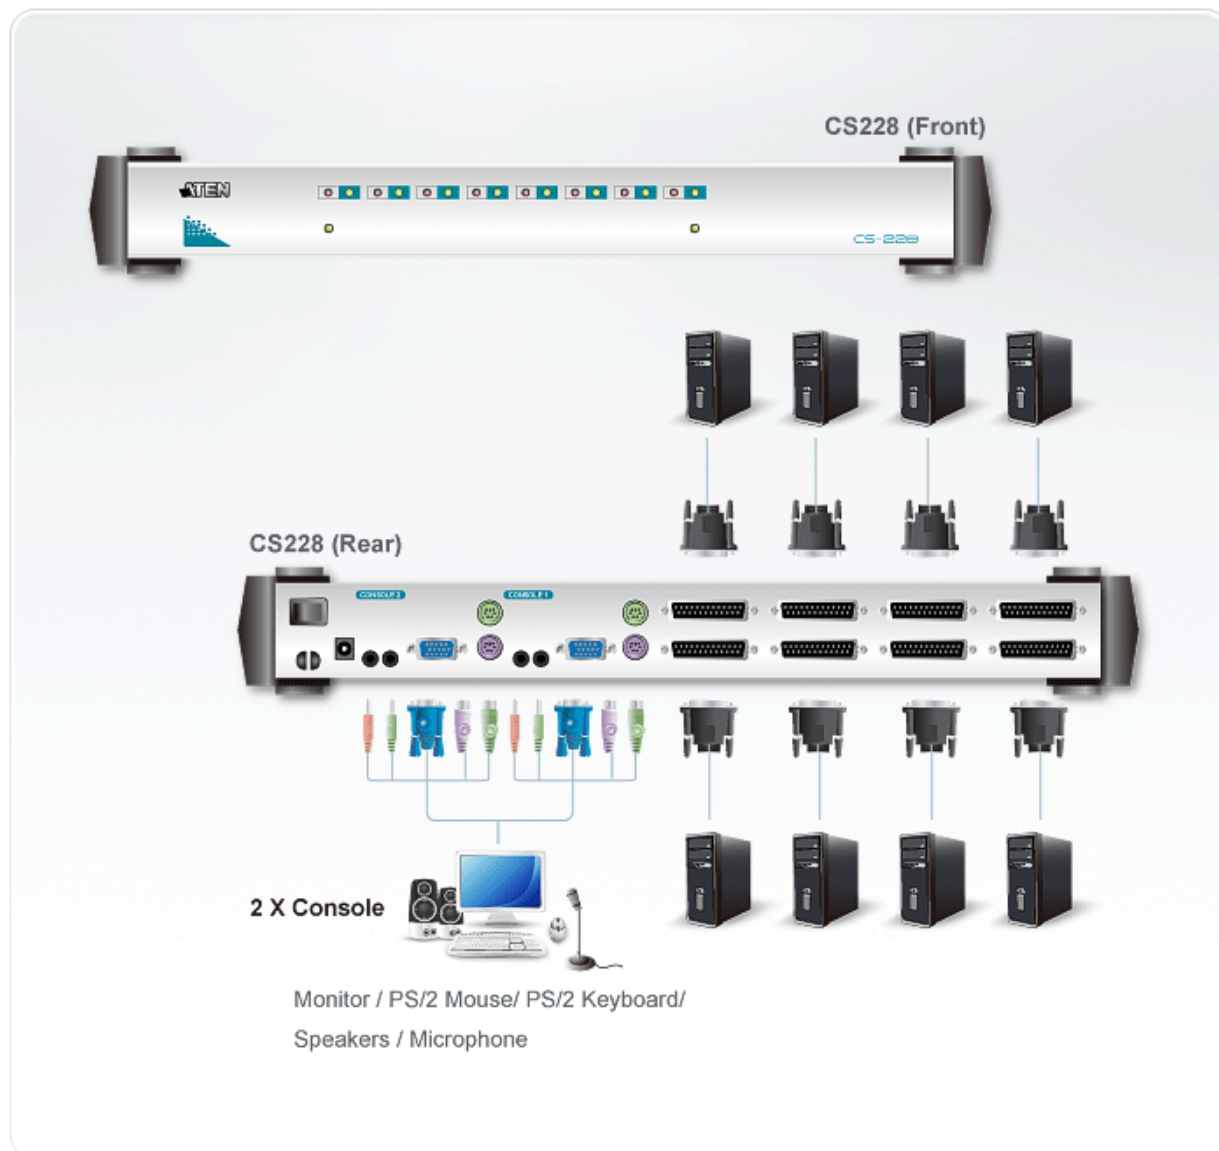

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2012 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.