



KHX11000D3LLK2/2GX

2GB (1GB 128M x 64-Bit x 2 pcs.) PC3-11000

CL7 240-Pin DIMM Kit

DESCRIPTION:


Kingston's KHX11000D3LLK2/2GX is a kit of two 128M x 64-bit 1GB (1024MB) DDR3-1375 CL7 SDRAM (Synchronous DRAM) memory modules, based on sixteen 64M x 8-bit DDR3 FBGA components per module. Each module pair supports **Intel® XMP** (Extreme Memory Profiles). Each module pair has been tested to run at DDR3-1375MHz at a low latency timing of 7-7-7 at 1.7V. The SPDs are programmed to JEDEC standard latency DDR3-1066Mhz timing of 7-7-7 at 1.5V. Each 240-pin DIMM uses gold contact fingers and requires +1.5V. The JEDEC standard electrical and mechanical specifications are as follows:

FEATURES:

- ✓ JEDEC standard 1.5V $\pm$ 0.075V Power Supply
- ✓ VDDQ = 1.5V $\pm$ 0.075V
- ✓ 533MHz fCK for 1066Mb/sec/pin
- ✓ 8 independent internal bank
- ✓ Programmable CAS Latency: 5,6,7,8,9,10
- ✓ Posted CAS
- ✓ Programmable Additive Latency: 0, CL - 2, or CL - 1 clock
- ✓ Programmable CAS Write Latency(CWL) = 7(DDR3-1066)
- ✓ 8-bit pre-fetch
- ✓ Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- ✓ Bi-directional Differential Data Strobe
- ✓ Internal(self) calibration : Internal self calibration through ZQ pin (RZQ : 240 ohm $\pm$ 1%)
- ✓ On Die Termination using ODT pin
- ✓ Average Refresh Period 7.8us at lower then TCASE 85°C, 3.9us at 85°C < TCASE . 95°C
- ✓ Asynchronous Reset
- ✓ 1066Mbps CL7 doesn't have backward compatibility with 800Mbps CL5
- ✓ PCB : Height 1.180" (30.00mm), double sided component

PERFORMANCE:

- | | |
|--|------------------------------|
| ✓ CL(IDD) | 7 cycles |
| ✓ Row Cycle Time (tRCmin) | 50.63ns (min.) |
| ✓ Refresh to Active/Refresh Command Time (tRFCmin) | 90ns |
| ✓ Row Active Time (tRASmin) | 37.5ns (min.) |
| ✓ Power | TBD W (operating per module) |
| ✓ UL Rating | 94 V - 0 |
| ✓ Operating Temperature | 0° C to 85° C |
| ✓ Storage Temperature | -55° C to +100° C |

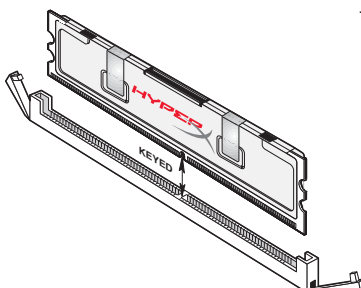

MODULE DIMENSIONS: