

Cat.5e U/UTP Patch Cord




The equip[®] Cat.5e U/UTP Patch Cord is composed of high-quality materials and thoroughly-examined to meet EIA/TIA 568-C.2 channel standard, delivering ultrahigh and error-free signal in the most demanding network environments.

| Key Feature

- Stranded 26AWG Patch Cord with 100MHz Performance.
- Gold Plating Pin Provides the Highest Interconnect Reliability
- High performance and easy installation
- Cable Length Printing on Plug

| Structure

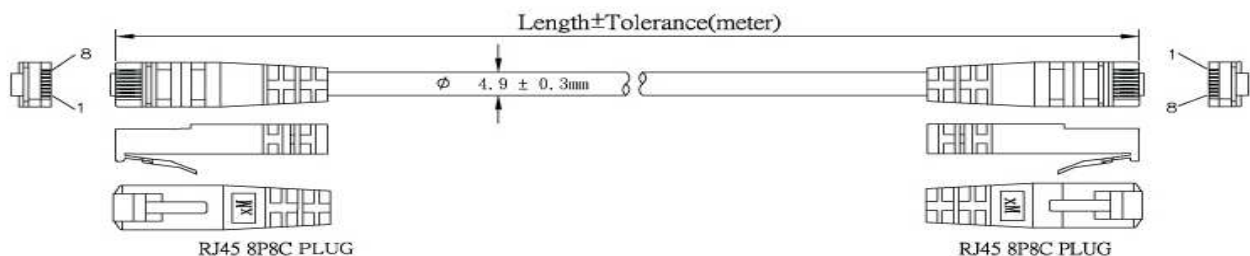

ITEM NO	LENGTH	TOLERANCE
805417	0.50M	0.01M
805410	1.0M	0.02M
805411	2.0M	0.03M
805412	3.0M	0.05M
805414	5.0M	0.08M
805416	10M	0.10M
805418	15M	0.15M
805419	20M	0.20M

I Specification

Conductor	Material	Bare Copper
	Construction	26AWG, 7/0.16 ± 0.015mm
Insulation	Thickness	MIN at any point: 0.14mm / MAX AVG:0.16 mm
	Diameter	0.75± 0.02mm
	Colors	Blue/White-Blue, Orange/White-Orange, Green/White-Green, Brown/White-Brown
Jacket	Material	PVC
	Thickness	MIN at any point: 0.40mm MAX AVG: 0.55mm
	Diameter	4.9 ± 0.3mm
	Marking	equip CAT.5E U/UTP PATCH CABLE E213738 CM (UL) C(UL) 4PR 26AWG ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2
Connector	RJ45 Plug	8P8C, RJ-45"

I Ordering Information



	Beige	Red	Blue	Green	Yellow
0.25m	805413	805423	805433	805443	805463
0.5m	805417	805427	805437	805447	805467
1.0m	805410	805420	805430	805440	805460
2.0m	805411	805421	805431	805441	805461
3.0m	805412	805422	805432	805442	805462
5.0m	805414	805424	805434	805444	805464
7.5m	805415	805425	805435	805445	805465
10m	805416	805426	805436	805446	805466
15m	805418				
20m	805419	805429	805439	805449	805469

Packing: equip Zip-bag