


Overview

HP Compaq dc7700 Business PC

HP recommends Windows® XP Professional

Ultra-slim Desktop

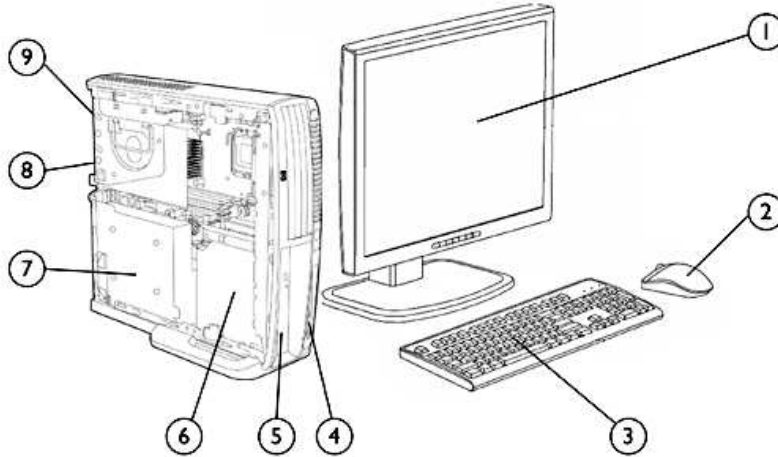


- | | |
|---|---|
| 1. Monitor (sold separately) | 6. (1) 3.5" internal bay |
| 2. 2-Button Scroll Mouse (PS/ 2) or Optical Scroll Mouse (PS/ 2 or USB) | 7. 200-watt Active Power Factor Correction (PFC) power supply |
| 3. HP Standard Keyboard (PS/ 2 or USB) or HP USB Smartcard Keyboard | 8. (1) full-height PCI slot (with optional riser) , (1) low profile PCI Express x16 slot (with optional riser)* |
| 4. Front I/ O: (2) USB 2.0, headphone and microphone | 9. Rear I/ O: (6) USB 2.0, (1) optional serial port (available via adapter), (1) optional parallel port (available via adapter), (1) optional DVI graphics port (available via DVI ADD2 adapter), (2) PS/ 2, (1) RJ45, (1) VGA, audio in/ out |
| 5. (1) Slimline Drive Bay | |

* NOTE: Only one optional riser is allowed: either the PCI riser or the PCI Express x16 riser.

Overview

Small Form Factor

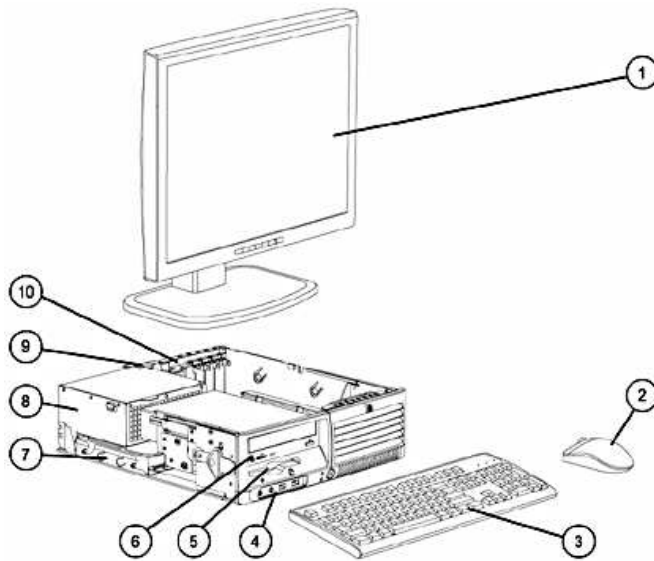


- | | |
|---|--|
| 1. Monitor (sold separately) | 7. (1) 3.5" internal bay |
| 2. 2-Button Scroll Mouse (PS/ 2) or Optical Scroll Mouse (PS/ 2 or USB) | 8. 240-watt Active Power Factor Correction (PFC) power supply |
| 3. HP Standard Keyboard (PS/ 2 or USB) or HP USB Smartcard Keyboard | 9. Rear I/ O: (6) USB 2.0, (1) standard serial port, (1) optional serial port, (1) parallel port, (2) PS/ 2, (1) RJ45, (1) VGA, (1) optional DVI graphics port (available via DVI ADD2 adapter), audio in/ out |
| 4. Front I/ O: (2) USB 2.0, headphone and microphone | 10. (2) low profile PCI slots, (1) low profile PCI Express x1 slot, (1) low profile PCI Express x16 slot standard* ; (2) full-height PCI slots with optional riser card |
| 5. (1) 3.5" external bay for optional HP 16-in-1 Media Card Reader, diskette drive, or other 3.5" device | |
| 6. (1) 5.25" external bay for optional optical drive, or other 5.25" device (bay tilts up for device removal and insertion) | |

* NOTE: With riser card option, PCI Express x1 and x16 slots are inaccessible.

Overview

Convertible Minitower

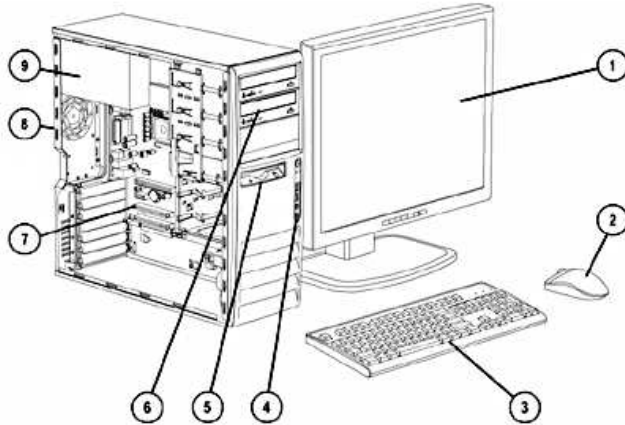

1. Monitor (sold separately)
2. 2-Button Scroll Mouse (PS/ 2) or Optical Scroll Mouse (PS/ 2 or USB)
3. HP Standard Keyboard (PS/ 2 or USB) or HP USB Smartcard Keyboard
4. Front I/ O: (2) USB 2.0, headphone and microphone
5. (1) 3.5" external bay for optional HP 16-in-1 Media Card Reader, diskette drive, or other 3.5" device
6. (3) 5.25" external bays and (2) 3.5" internal bays
7. (2) full-height PCI slots, (1) full-height PCI Express x1 slot, (1) full-height PCI Express x16 slot, (2) additional full-height PCI slots optional
8. Rear I/ O: 6 USB 2.0, 1 standard serial port, 1 optional serial port, 1 parallel port, 2 PS/ 2, 1 RJ45, 1 VGA, audio in/ out, mic in
9. 365-watt Active Power Factor Correction (PFC) power supply

Overview


At A Glance

- Designed for long-term, networked deployment within medium and large organizations in commercial business, finance and public sector industries
- Created using industry leading Design for Environment standards. Upgradeable, recyclable and energy efficient.
- Long purchase lifecycles and image stability for demanding enterprise environments
- Support for new Intel technologies introduced in 2006: Intel® Q965 Express chipset, Intel Core™ 2 Duo Processors, and Intel Graphics Media Accelerator 3000 integrated graphics
- Select models with new Intel vPro technology support the latest in manageability and security technology
- Value-added software
 - HP ProtectTools Security Software Suite, including embedded security, now preinstalled standard
 - HP Client Manager (<http://h18000.www1.hp.com/im/index.html>)
 - HP OpenView Configuration Management Solutions
 - Altiris Deployment Solution Agent
 - Symantec AntiVirus 10.0 with 60 day Live Update Subscription
 - HP Insight Diagnostics software
- Fully compatible software OS image across all three models (Ultra-slim Desktop, Small Form Factor, and Convertible Minitower)
- HP BIOS for better security, manageability and software image stability
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/businesssite/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Security
 - Embedded TPM 1.2 compliant security module (requires HP ProtectTools Embedded Security software), providing compatibility with future security features expected in Microsoft Vista
 - Redundant Array of Independent Disks (RAID) 1 configurations to protect data against hardware failures
 - HP Backup and Recovery Manager to protect data against software corruption or incompatibilities due to patching or upgrades
- Tool-less serviceability features for easier upgrades and repairs
- Choice of professional chassis form factors to accommodate the desired mix between expandability and size

Configurable Components- Select Models (localized by Regions)

Model Key and Example

NOTE: This diagram is an example that illustrates how to read the model number. It is not intended to give every available configuration choice specified in the body of this document and may include references to modules that are out of date and no longer available.

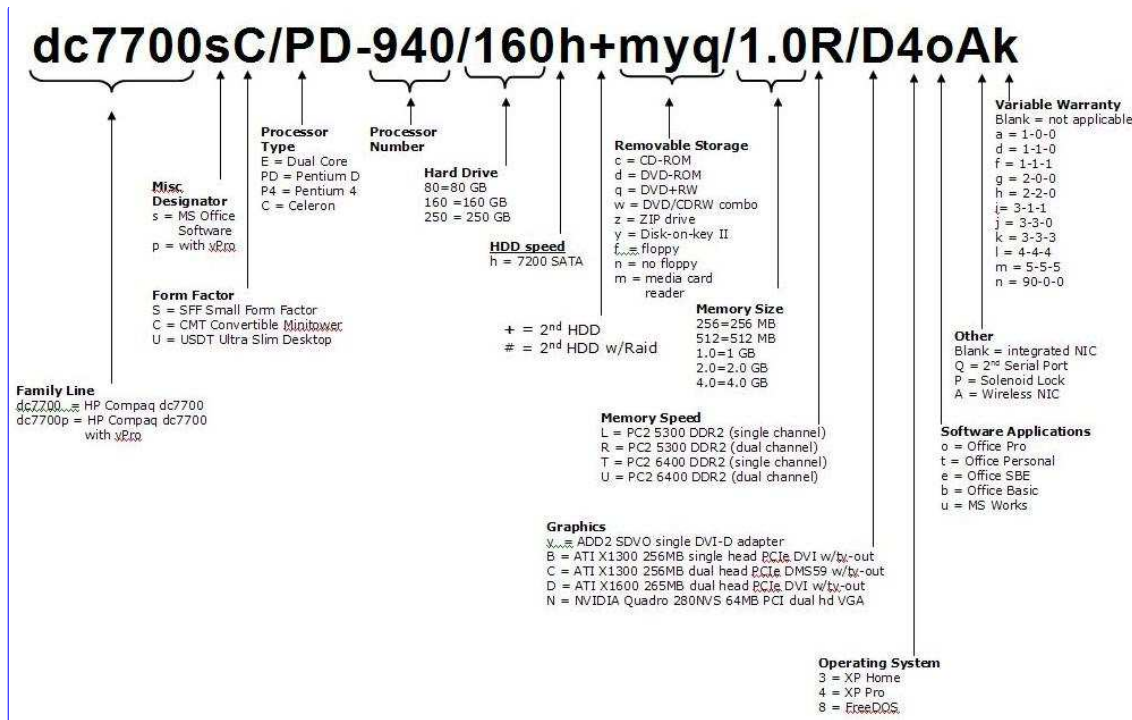

Configurable Components

Operating System – One of the following	Genuine Windows XP Professional SP2
	Genuine Windows XP Home SP2
	FreeDOS
	Windows Vista Capable - Not all Windows Vista features are available for use on all Windows Vista Capable PCs. All Windows Vista Capable PCs will run the core experiences of Windows Vista, such as innovations in organizing and finding information, security, and reliability. Some features available in premium editions of Windows Vista – like the new Windows Aero™ user interface – require advanced or additional hardware.
	Check www.windowsvista.com/getready for details.
	NOTE: Microsoft Windows NT 4.0 and Microsoft Windows 2000 are not available on these systems. Some drivers for Windows 2000 are available for download from http://www.hp.com .

Value-added Software (not included with FreeDOS)	HP ProtectTools Security Solutions	Microsoft Office 2003 Basic
	Altiris Deployment Solution Agent	Microsoft Office 2003 Personal
	HP OpenView Configuration Management Solutions Agent (visit http://www.hp.com/go/easydeploy)	Microsoft Office 2003 Professional
	HP Insight Diagnostics (on documentation CD)	Microsoft Office 2003 Small Business
	Computer Setup Utility	Microsoft Works 8.5
	HP Backup and Recovery Manager	Microsoft Internet Explorer with Google Toolbar
	Symantec AntiVirus 10.0 with 60 day Live Update Subscription	Adobe Acrobat Reader
		PDF Complete

Value-added Services and Features	HP Stable Platform Program	Factory Express Deployment and Lifecycle Services
	Business-to-Business Portals	TPM 1.2 Security
	HP Global Series Services	Tool-less Serviceability

Service and Support	On-site Warranty and Service ^{Note 1} : This three-year (3-3-3), limited warranty and service offering delivers three years of parts, labor and on-site repair. Response time is next businessday ^{Note 2} and includes free telephone support ^{Note 3} 24 x 7. Global coverage ^{Note 2} ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/ regions do not offer one year onsite and labor. NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country. NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.
---------------------	--

	Ultra-slim Desktop	Small Form Factor	Convertible Minitor
Dimensions			
Chassis Dimensions (H x W x D)	2.95 x 12.4 x 13.18 in (7.49 x 31.50 x 33.48 cm)	3.95 x 13.3 x 14.9 in (10.03 x 33.78 x 37.85 cm)	17.65 x 6.6 x 17.8 in (44.83 x 16.76 x 45.21 cm)



Configurable Components

System weight	13.2 lb (5.99 kg)	19.5 lb (8.85 kg)	32.5 lb (14.74 kg)
System volume	7.9 liters	12.8 liters	33.8 liters
Shipping weight	19 lb (8.62 kg)	30 lb (13.61 kg)	43 lb (19.50 kg)
Maximum supported weight (desktop orientation)	77.1 lb (35 kg)	77.1 lb (35 kg)	77.1 lb (35 kg)
Shipping box dimensions (H x W x D)	12.63 x 18.75 x 20 in (32.08 x 47.63 x 50.8 cm)	12.63 x 18.75 x 20 in (32.08 x 47.63 x 50.8 cm)	23.38 x 13.06 x 22.88 in (59.39 x 33.17 x 58.12 cm)
Power Supply	200W power supply – Active PFC	240W power supply – Active PFC	365W power supply – Active PFC
Ports	Ultra-slim Desktop	Small Form Factor	Convertible Minitower
USB 2.0	8 (2 front, 6 rear)	8 (2 front, 6 rear)	8 (2 front, 6 rear)
Serial	1 optional via Serial & parallel I/ O adapter	1 standard with 2nd optional	1 standard with 2nd optional
Parallel	1 optional via Serial & parallel I/ O adapter	1	1
PS/ 2	1 keyboard, 1 mouse		
Video	analog for integrated graphics		
DVI output	available via ADD2 card, PCI-E x16 card, or PCI card		
Support for Multi-Monitor	available via ADD2 card, PCI-E x16 card, or PCI card		
Audio	Front – mic and headphone Rear – line in, line out		Front – mic and headphone Rear – line in, line out, mic in
NIC (RJ45)	Integrated Intel 82566DM Gigabit Network Connection Ethernet		

		USDT	SFF	CMT
Chipset	Intel Q965 Express chipset	X	X	X

Processor and Speed*	Intel Celeron D Processors:			
One of the following	Intel Celeron D 352 Processor (3.20-GHz, 512K L2 cache, 533-MHz FSB)	X	X	X
	Intel Celeron D 360 Processor (3.46-GHz, 512K L2 cache, 533-MHz FSB)	X	X	X
	Intel Pentium 4 Processors with Hyper Threading Technology:			
	Intel Pentium 4 524 Processor (3.06-GHz, 1-MB L2 cache, 533 -MHz FSB)	X	X	X
	Intel Pentium 4 531 Processor (3.0-GHz, 1-MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Pentium 4 541 Processor (3.2-GHz, 1 -MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Pentium D Processors:			
	Intel Pentium D 915 Processor (2.8-GHz, 2x1MB L2 cache, 800-Mhz FSB)	X	X	X
	Intel Pentium D 925 Processor (3.0-GHz, 2x2MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Pentium D 945 Processor (3.4-GHz, 2x2MB L2 cache, 800-MHz FSB)	X	X	X
	Intel Core 2 Duo Processors:			
	Intel Core 2 Duo E6300 Processor (1.86-GHz, 2 MB L2 cache, 1066-MHz FSB)	X	X	X
	Intel Core 2 Duo E6400 Processor (2.13-GHz, 2 MB L2 cache, 1066-MHz	X	X	X



Configurable Components

FSB)

Intel Core 2 Duo E6600 Processor (2.40-GHz, 4 MB L2 cache, 1066-MHz FSB)	X	X	X
--	---	---	---

Intel Core 2 Duo E6700 Processor (2.66-GHz, 4 MB L2 cache, 1066-MHz FSB)	X	X	X
--	---	---	---

* NOTE: Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families.

Intel vPro Technology*	Uses AMT 2.0 (Active Management Technology) for network alerting and management of systems regardless of power state, as well as operating system-absent environments	X	X	X
------------------------	---	---	---	---

* NOTE: Units configured with this feature are referred to as HP Compaq dc7700p Business PCs.

Memory

DDR2 SYNCH DRAM NON-ECC MEMORY

Memory upgrades are accomplished by adding single or multiple DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations. The Intel Q965 Express chipsets support non-ECC DDR2 PC2-5300 (667-MHz) and PC2-6400 (800-MHz) memory.

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

HP recommends dual-channel symmetric configurations for maximum performance. For best performance, add the same amount of total memory to each channel and do not mix speeds. For dual-channel symmetric performance, the total amount of memory in each channel must be equal. If speeds are mixed, speed will default to the slowest DIMM.

Ultra-slim Desktop

Maximum Memory* Supports up to 3-GB of DDR2 SYNCH DRAM. Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

DIMM Size	Slot		
	Channel A		Channel B
	1 (black)	2 (white)	3 (white)
512-MB	512-MB		
512-MB (dual-channel symmetric)	256-MB		256-MB
1-GB	1-GB		
1-GB (dual channel symmetric)	512-MB		512-MB
3-GB maximum	1-GB	1-GB	1-GB

* NOTE: The Intel Q965 Express chipset includes a built-in Management Engine (ME), which allocates memory for manageability functions. Management Engine memory is shared with system memory. If the PC contains a single DIMM, 8 MB of memory is pre-allocated for it at system startup. If the PC contains two DIMMs, 16 MB of memory is pre-allocated. This memory is not made



Configurable Components

available to the operating system, just as pre-allocated video memory is not available.

Small Form Factor and Convertible Minitower

Maximum Memory*

Supports up to 4-GB of DDR2 SYNCH DRAM. Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

NOTE: Above 3-GB, all memory may not be available due to system resource requirements.

DIMM Size	Slot			
	Channel A		Channel B	
	1 (black)	2 (white)	3 (white)	4 (white)
512-MB	512-MB			
512-MB (dual-channel symmetric)	256-MB		256-MB	
1-GB	1-GB			
1-GB (dual-channel symmetric)	512-MB		512-MB	
1-GB (dual-channel symmetric)	256-MB	256-MB	512-MB	
2-GB (dual-channel symmetric)	1-GB		512-MB	512-MB
2-GB (dual-channel symmetric)	512-MB	512-MB	512-MB	512-MB
4-GB maximum (dual-channel symmetric)	1-GB	1-GB	1-GB	1-GB

* NOTE: The Intel Q965 Express chipset includes a built-in Management Engine (ME), which allocates memory for manageability functions. Management Engine memory is shared with system memory. If the PC contains a single DIMM, 8 MB of memory is pre-allocated for it at system startup. If the PC contains two DIMMs, 16 MB of memory is pre-allocated. This memory is not made available to the operating system, just as pre-allocated video memory is not available.

Memory Configurations—

One of the following

	USDT	SFF	CMT
512-MB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (1 x 512)	X	X	X
512-MB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (2 x 256)	X	X	X
1-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (1 x 1GB)	X	X	X
1-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (2 x 512)	X	X	X
2-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (2 x 1GB)	X	X	X
2-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (4 x 512)		X	X
3-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (3 x 1GB)	X	X	X
4-GB DDR2 Synch Dram PC2-6400 (800-MHz) Non ECC (4 x 1GB)		X	X
512-MB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (1 x 512)	X	X	X
512-MB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (2 x 256)	X	X	X
1-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (1 x 1GB)	X	X	X
1-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (2 x 512)	X	X	X
2-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (2 x 1GB)	X	X	X




Configurable Components

2-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (4 x 512)		X	X
3-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (3 x 1 GB)	X	X	X
4-GB DDR2 Synch Dram PC2-5300 (667-MHz) Non ECC (4 x 1 GB)		X	X

Expandability	USDT	SFF	CMT
PCI slots	Optional with riser card: 1 full-height (4.2"), length (6.6")	2 low-profile (2.5"), length (6.6") standard; 2 full-height (4.2"), length (6.875") via optional riser card. NOTE: With riser card option, express x1 and x16 slots are not accessible.	2 full-height (4.2"), length (13.4") standard; (2 additional full-height slots available via optional extender card)
Max power per slot	25W	25W	25W
PCI Express x16 slot	Optional with riser card: 1 low-profile (3.987"), length (6.60")	1 low-profile (2.5"), length (6.6")	1 full-height (4.2"), length (10.5")
Max power per slot	25W	25W	75W
PCI Express x1 slot	-	1 low profile (2.5"), length (6.6")	1 full-height (4.2"), length (13.4")
Max power per slot	N / A	10W	10W
External Bays	1 Slimline (W xDxH): 128 x 127 x 12.7 mm	2	4
	USDT	SFF	CMT
3.5"	N / A	1	1
5.25"	N / A	1 (length 8.189")	3 (2 – length 8.189", 1 – length 5.71")
Internal 3.5" HDD Bays	1	1	2
Hard Drive Controller (PCI) Supported	Serial ATA (support for SATA 1.5-Gb/ s and 3.0-Gb/ s hard drives)		
Hard Drive Interfaces Supported	1 Serial ATA interface	3 Serial ATA interfaces	4 Serial ATA interfaces

Storage Diagrams

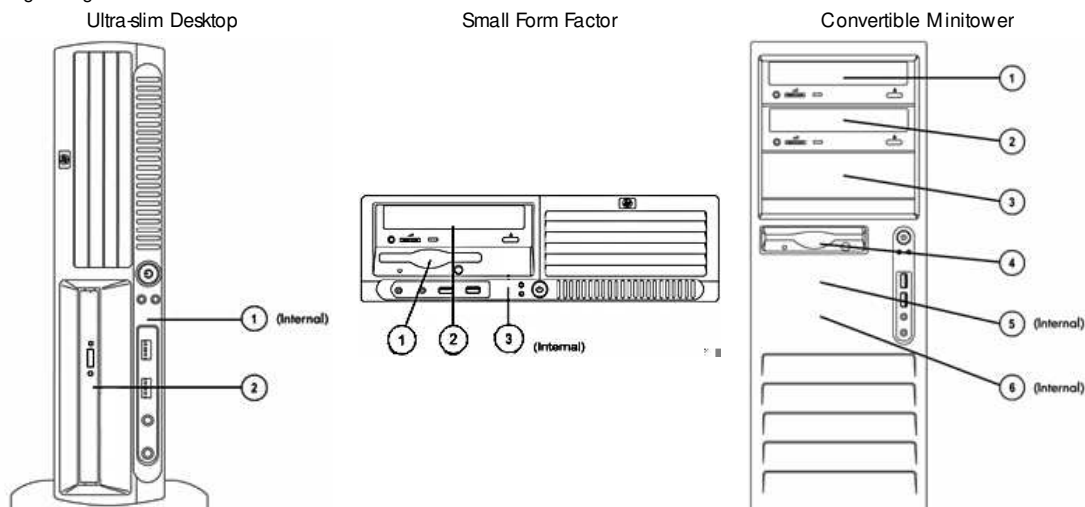

Configurable Components

Storage – Drive Support

	USDT			SFF		CMT			
	Slimline Drive Bay	3.5" Serial ATA Hard Drive	Diskette Drive or PCI Media Card Reader (optional)	Storage Drive Bay	3.5" Serial ATA Hard Drives	Diskette Drive	PCI Media Card Reader (optional)	Storage Drive Bays for multiple Optical Drives	3.5" Serial ATA Hard Drives
Quantity Supported	1	1	1	1	2	1	1	3	3
Position Supported	(2)	(1)	(1)	(2)	(1), (3)	(4)	(4), (1), (2), (3)	(1), (2), (3)	(4), (5), (6)
Controller	SATA to IDE Bridge	SATA	Diskette Controller or USB header on PCI card	SATA	SATA	Diskette Controller	USB header on PCI card	SATA	SATA

		USDT	SFF	CMT
Hard Drive – One or two of the following	80-GB SATA 3.0-Gb/ s Hard Drive (8MB Cache, 7200 rpm)	X	X	X
	160-GB SATA 3.0-Gb/ s Hard Drive (8MB Cache, 7200 rpm)	X	X	X
	250-GB SATA 3.0-Gb/ s Hard Drive (8MB Cache, 7200 rpm)	X	X	X
	RAID 80-GB SATA 3.0-Gb/ s Hard Drive (7200 rpm)		X	X
	RAID 160-GB SATA 3.0-Gb/ s Hard Drive (7200 rpm)		X	X
	2nd hard drive, 80-GB SATA 3.0-Gb/ s Hard Drive (8MB Cache, 7200 rpm)		X	X
	2nd hard drive, 160-GB SATA 3.0-Gb/ s Hard Drive (8MB Cache, 7200 rpm)		X	X
	2nd hard drive, 250-GB SATA 3.0-Gb/ s Hard Drive (8MB Cache, 7200 rpm)		X	X

Removable Storage – One or more of the following depending on form factor (see Storage section below)	Diskette Drives			
	1.44-MB Diskette Drive		X	X
	Optical Drives			
	SATA CD-ROM Drive		X	X
	SATA CD-RW / DVD-ROM Combo Drive		X	X
	SATA DVD-ROM Drive		X	X
	SATA DVD+/-RW (DL/ DF) LightScribe Drive		X	X
	Slimline Optical Drives			
	PATA CD-ROM Slim Drive	X		
	PATA CD-RW / DVD-ROM Combo Slim Drive	X		
	PATA DVD+/-RW Slim Drive	X		
	PATA DVD-ROM Slim Drive	X		



Configurable Components

Media Card Reader – One of the following	HP 16-in-1 3.5" Media Card Reader w/ PCI card	X		
	HP 16-in-1 5.25" Media Card Reader w/ PCI card			X
Security	Integrated 1.2 TPM Embedded Security Chip	X	X	X
	Drive Lock	X	X	X
	HP ProtectTools Embedded Security Software	X	X	X
	Serial, Parallel, USB Enable/ Disable (via BIOS)	X	X	X
	Removable Media Write/ Boot Control	X	X	X
	Power-On Password (via BIOS)	X	X	X
	Setup Password (via BIOS)	X	X	X
	Solenoid Hood Lock / Sensor		X	X
	Hood Removal Sensor	X		
NIC	Intel 82566DM Gigabit Network Connection (integrated on system board)	X	X	X
	Intel PRO/ 1000 PT PCIe Gigabit NIC (full height bracket)			X
	Intel PRO/ 1000 PT PCIe Gigabit NIC (low profile bracket)		X	
	Broadcom NetXtreme Gigabit PCIe NIC (full height bracket)			X
	Broadcom NetXtreme Gigabit PCIe NIC (low profile bracket)	X*	X	
	NOTE: * Requires optional PCIe riser card.			
Modem		USDT	SFF	CMT
	Agere 2006 PCI 56K International SoftModem (full height)	X*	X*	X
	Agere 2006 PCI 56K International SoftModem (low profile)		X	
	NOTE: * Requires optional PCI riser card.			
Graphics	Integrated Intel Graphics Media Accelerator 3000	X	X	X
	DVI ADD2 SDVO single head Graphics Adapter for USDT (PCIe x16)	X		
	DVI ADD2 SDVO single head low profile Graphics Adapter (PCIe x16)		X	
	DVI ADD2 SDVO single head full-height Graphics Adapter (PCIe x16)			X
	ATI RADEON X1300 256MB low profile PCIe Card, DVI w/ TV	X*	X	
	ATI RADEON X1300 256MB full-height PCIe Card, DVI w/ TV			X
	ATI RADEON X1600XT 256MB, full-height PCIe Card, dual DVI w/ TV-out			X
	NVIDIA Quadro NVS 280 64-MB PCI dual head VGA Card	X**	X***	X***
	NOTES: * USDT requires optional PCIe riser card. ** USDT requires optional PCI riser card. *** Two NVIDIA Quadro NVS 280 PCI graphics cards can be installed to provide support for four monitors.			
Audio	Integrated High Definition audio with Realtek 2 channel ALC262 codec (all ports are stereo)	X	X	X



Configurable Components

	Microphone and Headphone front ports	X	X	X
	Microphone rear port*			X
	Line-out and Line-In rear ports*	X	X	X
	Multistreaming capable*	X	X	X
	Internal Speaker	X	X	X
NOTE: * Rear audio ports are re-taskable as Line-in, Line-out, or Microphone-in. External speakers must be powered externally. Multistreaming can be enabled in the Realtek control panel to allow independant audio streams to be sent to/ from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.				
Keyboard – One of the following	HP PS/ 2 Standard Keyboard	X	X	X
	HP USB BG1650 Keyboard	X	X	X
	HP USB Standard Keyboard	X	X	X
	HP USB Smartcard Keyboard	X	X	X
Mouse – One of the following	HP PS/ 2 2-Button Scroll Mouse	X	X	X
	HP PS/ 2 2-Button Optical Scroll Mouse	X	X	X
	HP USB 2-Button Optical Scroll Mouse	X	X	X
Miscellaneous	HP FireWire / IEEE 1394 PCI Card (full height)	X*	X*	X
	HP FireWire / IEEE 1394 PCI Card (low profile)		X	
		USDT	SFF	CMT
	PCI Express riser card – adds 1 low profile PCIe slot	X		
	PCI riser card – adds 1 full-height PCI slot	X		
	PCI riser card – adds 2 full-height PCI slots		X	
	NOTE: Low profile slots are unusable with riser card installed.			
	PCI extender card for CMT (adds 2 PCI slots)			X
	PCI Serial and parallel I/O adapter	X*		
	2nd serial port adapter (full height)			X
	2nd serial port adapter (low profile)		X	
	Tower stand	X	X	
	Configure dc7700 CMT in desktop orientation			X
	NOTE: * Requires optional PCI riser card.			

After-Market Options (availability may vary by region)

		USDT	SFF	CMT	After-Market Options Part Number
Communications	Wireless				
	HP BT450 USB Bluetooth Wireless Printer and PC Adapter	X	X	X	IPQ639A
	NICs				
	Broadcom NetXtreme Gigabit Ethernet PCIe NIC Card	X* *	X	X	EA833AA
	Intel/ PRO 1000 PT PCIe Gigabit NIC Card	X* *	X	X	EH352AA
	Modem				
	Agere 2006 PCI 56K International SoftModem	X*	X	X	EK694AA
NOTES:					
* USDT requires optional PCI riser card.					
** USDT requires optional PCIe riser card.					
Graphics	Single head solutions				
	Intel DVI ADD2 Graphics Adapter (PCIe x16)		X	X	DY674A
	ATI Radeon X1300 (256MB SH) PCIe Graphics Card	X* *	X	X	AG392AA
	Multi head solutions				
	NVIDIA Quadro NVS 280 PCI Graphics Card (DMS59 DVI Dual-head Connector Cable)	X*	X	X	DY599A
	NVIDIA Quadro NVS 285 with TurboCache Technology PCIe Graphics Card	X* *	X	X	EE061AA
	HP DMS59 DVI Dual-head Connector Cable* **		X	X	DL139A
NOTE: * Requires optional PCI riser card.					
** USDT requires optional PCIe riser card.					
*** Requires NVIDIA Quadro NVS 280 PCI Graphics					
Hard Drives	Serial ATA Hard Drives				
	HP 80-GB SATA 3.0-Gb/ s Hard Drive	X	X	X	PY276AA
	HP 160-GB SATA 3.0-Gb/ s Hard Drive	X	X	X	PY277AA
	HP 250-GB SATA 3.0-Gb/ s Hard Drive	X	X	X	PY278AA
Input/ Output Devices	Keyboards				
	HP PS/ 2 Standard Keyboard	X	X	X	DT527A
	HP USB Standard Keyboard	X	X	X	DT528A
	Pointing Devices				
	HP PS/ 2 2-Button Scroll Mouse	X	X	X	DD440B
	HP PS/ 2 2-Button Optical Scroll Mouse	X	X	X	EY703AA
	HP USB 2-Button Optical Scroll Mouse	X	X	X	DC172B
Memory (DIMMs)	PC2-5300 (DDR2, 667 MHz) DIMMs Non-ECC				
	HP 1 GB PC2-5300 (DDR2-667) DIMM	X	X	X	PX976AA



After-Market Options (availability may vary by region)

HP 512 MB PC2-5300 (DDR2-667) DIMM	X	X	X	PX975AA
HP 256 MB PC2-5300 (DDR2-667) DIMM	X	X	X	PX974AA
PC2-6400 (DDR2, 800 MHz) DIMMs	USDT	SFF	CMT	After-Market Options Part Number
HP 1-GB PC2-6400 (DDR2 800 MHz) DIMM	X	X	X	AH058AA
HP 512-MB PC2-6400 (DDR2 800 MHz) DIMM	X	X	X	AH056AA
HP 256-MB PC2-6400 (DDR2 800 MHz) DIMM	X	X	X	AH054AA

Monitors	TFTs				
	HP L1506 15 TFT Flat Panel Monitor – Analog only	X	X	X	PX848AA#ABA
	HP L1706 17 TFT Flat Panel Monitor – Analog only	X	X	X	PX849AA#ABA
	HP L1740 17 TFT Flat Panel Display – Analog/ Digital	X	X	X	PL766AA#ABA
	HP L1755 17 TFT Flat Panel Display – Analog/ Digital	X	X	X	PL777AA#ABA
	HP L1906 19 TFT Flat Panel Display – Analog only	X	X	X	PX850AA#ABA
	HP L1940T 19 TFT Flat Panel Display – Analog/ Digital	X	X	X	EM869AA#ABA
	HP L1955 19 TFT Flat Panel Display – Analog/ Digital	X	X	X	PD974AA#ABA
	HP L2065 20 TFT Flat Panel Display – Analog/ Digital	X	X	X	EF227A4#ABA
	HP LP2465 24 TFT W idescreen Flat Panel Display – Analog/ Digital	X	X	X	EF224A4#ABA
	CRTs				
	HP s7540 17 (16.0 vis) CRT Monitor	X	X	X	PF997AA#ABA
	HP v7650 17 (16.0 vis) Flat-face CRT Monitor	X	X	X	PF996AA#ABA

Multimedia	HP USB Powered Speakers	X	X	X	FD628AA
------------	-------------------------	---	---	---	---------

PATA Slim Optical Drives	DVD-ROM Drive				
	HP PATA DVD-ROM Slim Drive	X			AH041AA
	Combo Drive				
	HP PATA CD-RW / DVD-ROM Combo Slim Drive	X			AH042AA
	DVD+/ -RW Drive				
	HP PATA DVD+/ -RW (DL/ DF) LightScribe Slim Drive	X			AH043AA

SATA Half-Height Optical Drives	DVD-ROM Drive				
	HP SATA DVD-ROM Drive		X	X	AH047AA
	Combo Drive				
	HP SATA CD-RW / DVD-ROM Combo Drive		X	X	AH046AA
	DVD+/ -RW Drive				
	HP SATA DVD+/ -RW (DL/ DF) LightScribe Drive		X	X	AH048AA

Removable Storage	Drive Key Options				
-------------------	-------------------	--	--	--	--



After-Market Options (availability may vary by region)

	HP 512MB USB 2.0 Drive Key	X	X	X	ED516AA
	HP 1GB USB 2.0 Drive Key	X	X	X	AG382AA
	Diskette and Digital Drives				
	HP 1.44-MB External USB Diskette Drive	X	X	X	DC141B
	HP 1.44-MB Internal Diskette Drive		X	X	DS710G
	Multimedia	USDT	SFF	CMT	After-Market Options Part Number
	HP 16-in-1 Media Card Reader with PCI Card		X	X	EM718AA
Security	Kensington Lock	X	X	X	PC766A
	HP Business PC Security Lock	X	X	X	PV606AA
	HP USB Biometric Fingerprint Reader	X	X	X	EM717AA
	HP (USDT) Wall Mount Security Sleeve*	X			PA719A
	HP (SFF) Wall Mount Security Sleeve**		X		PA717A
	HP USB Smartcard Keyboard	X	X	X	ED707AA
NOTES:					
* Dimensions (W x H x L): 12.7 x 3.5 x 12.0 inches; Weight: 3.8 lb					
** Dimensions (W x H x L): 13.5 x 4.4 x 14.4 inches; Weight: 5.9 lb					
Software	HP OpenView Client Configuration Manager	X	X	X	T3488AA (use T3489AA for 1000 licenses)
	HP Client Foundation Suite	X	X	X	EF117AA (use EF118AA for 1000+ licenses)
	Includes:				
	HP Client Manager				
	HP Systems Insight Manager Connector				
	Altiris Local Recovery Pro				
	Altiris Inventory Solution				
	Altiris Deployment Solution				
	HP Client Premium Suite	X	X	X	EF119AA (use EF120AA for 1000+ licenses)
	Includes:				
	HP Client Manager				
	HP Systems Insight Manager Connector				
	HP OpenView Connector				
	Altiris Connector Solution				
	Altiris Local Recovery Pro				
	Altiris Audit Express				
	Altiris Client Management Suite Level 1				
Brackets/ Stands	HP Integrated Work Center Stand	X			DL641B
	Tower Stand		X		PS797A
Miscellaneous	HP Serial & Parallel IO Adapter	X			PD825A
	HP 2nd Serial Port		X	X	PA716A



After-Market Options (availability may vary by region)

Accessories	HP (50 Pk) 5.25" Blank Bezel Kit		X	X	DC177B
	HP (USDT) PCI Riser Board	X			ED247AA
	HP (USDT) PCIe Riser Board	X			EU054AA
	HP (SFF) PCI Riser Board		X		PD824A
	HP PCI Extender			X	DC179B
	HP FireWire / IEEE 1394 PCI Card	X*	X	X	PA997A
	Belkin USB to Serial Adapter	X	X	X	EM449AA

NOTE: * Requires optional PCI riser card.

Technical Specifications

Unit Environment and Operating Conditions	Ultra-slim Desktop	Small Form Factor	Convertible Minitower
General Unit Operating Guidelines			
- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range. - Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow. - Never restrict airflow into the computer by blocking any vents or air intakes. - Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air. - Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow. - If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.			
Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F (30° to 60° C)		
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)		
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)		
* NOTE: Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/ Hr. The upper limit may be limited by the type and number of options installed.			

Power Supply	Ultra-slim Desktop	Small Form Factor	Convertible Minitower
Power Supply	200 watt custom power supply – Active PFC)	240 watt custom power supply – Active PFC	365 watt custom power supply – Active PFC)
Operating Voltage Range	90 – 264 VAC	90 – 264 VAC	90 – 264 VAC
Rated Voltage Range	100 – 240 VAC	100 – 240 VAC	100 – 240 VAC
Rated Line Frequency	50/ 60 Hz	50/ 60 Hz	50/ 60 Hz
Operating Line Frequency Range	47 – 63 Hz	47 – 63 Hz	47 – 63 Hz
Rated Input Current	4A	5A	6A
System Heat Dissipation	Typical 340 btu/ hr (86 kg-cal/ hr) Maximum 1050 btu/ hr (265 kg-cal/ hr)	Typical 340 btu/ hr (86 kg-cal/ hr) Maximum 1260 btu/ hr (318 kg-cal/ hr)	Typical 375 btu/ hr (95 kg-cal/ hr) Maximum 1916 btu/ hr (483 kg-cal/ hr)
Power Supply Fan	70mm variable speed	80mm variable speed	92mm variable speed
Energy Star 3.0 Compliant	X	X	X
Blue Angel Compliant ($<5\text{w}$ in S5 – Power Off)	X	X	X
FEMP Standby Power Compliant ($<2\text{W}$ in S5 – Power Off) **	X	X	X
Power Consumption in ES Mode – Suspend to RAM (S3) (Instantly Available PC)	$< 3\text{W}$	$< 3\text{W}$	$< 3\text{W}$
Environmental and Mechanical Engineering Support Center (EMESC) – Intranet Web Site only	http:// env-webserver.ccm.cpqcorp.net/ EMESC/ default.htm		
** NOTE: Power consumption in the Off/ Apparent Off mode is measured and reported with the network interface controller "Wake on LAN" feature disabled in F10 Setup (default is "enabled").			



Technical Specifications

ROM BIOS Information

Key features of the HP BIOS in the dc7700 include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Business desktop computer into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages. Select models offer Intel vPro technology including AMT (Active Management Technology).
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Security – HP BIOS Configuration for ProtectTools offers a robust and flexible set of security features to help the system administrator secure their systems from removal of sensitive data, and help prevent access by unauthorized users.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies to assist in operating the HP Business Desktop computer in any enterprise environment.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (Flashlite), BIOS updates from within Windows (HPQFlash, SSM), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.

Additional HP BIOS Features

- Power-On password – Helps prevent an unauthorized user from powering on the system. After a TPM Basic User password is established in windows, the user or admin can require TPM hardware based authentication during the power-on process.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Compaq dc7700 models use ACPI to provide power conservation features under Windows XP.

Other Features	Description
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). • Allows the system to wake from a low power mode. • Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
SM BIOS Ver. 2.4	System Management BIOS, previously known as DMI BIOS, for system management information
Wired for Management Support	Intel-driven, industry-wide initiative to make Intel architecture-based PCs, servers and mobile computers more inherently manageable right out of the box and over the network
Dual-State Power Button	Power button acts as both an on/ off button and suspend-to-sleep button



Technical Specifications

Serviceability Features of System		
Dual Color Power LED on Front of Computer (Indicates Normal Operations and Fault Conditions)		
Diagnostic LED Explanation Table	Number of 1-second red LED blinks followed by 2-second pause, then repeats: 2-processor thermal protection activated 3-processor not installed 4-power supply failure 5-memory error 6-video error 7-PCA failure (ROM detected failure prior to video) 8-invalid ROM, bootblock recover mode	
System/ Emergency ROM	Flash ROM	CMOS Battery Holder for easy Replacement
Flash Recovery with Video Configuration Record SW	5 Aux Power LED on System PCA	Processor ZIF Socket for easy Upgrade
Over-Temp Warning on Screen (Requires IM Agents)	Clear Password Jumper	DIMM Connectors for easy Upgrade
HP Backup and Recovery Manager	Clear CMOS Button	NIC LEDs (integrated) (Green & Amber)

Serviceability Features of Chassis		
Dual Color Power and HD LED – To Indicate Normal Operations and Fault Conditions	Color coordinated cables and connectors	Tool-less Hood Removal
Front power switch	System memory can be upgraded without removing the system board or any internal components	Tool-less Hard Drive, CD & Diskette Removal
Green Pull Tabs, and Quick Release Latches for easy Identification		Tool-less System Board Removal

NOTE: Thumb screw release mechanism is used with the Ultra-slim Desktop chassis cover.

Feature	Description
AMT 2.0 support (Active Management Technology)	Select models offer new Intel vPro Technology utilizing AMT 2.0 for network alerting and management of systems regardless of power state, as well as operating system-absent environments.
ASF 2.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments



Technical Specifications

Tower	Product can be oriented as a tower (in addition to desktop orientation)
Drive Lock*	Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.
Drive Self Tests (DPS)*	• Drive Protection System • A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user. • Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced. • The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures.
DPS Access through F10 Setup during Boot	
SMART Technology* (Self-Monitoring, Analysis and Reporting Technology)	
SMART I – Drive Failure Prediction	
SMART II – Off-Line Data Collection	• Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count • By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure
SMART III – Off-Line Read Scanning with Defect Reallocation	

* NOTE: This feature is inoperable when a RAID (Redundant Array of Independent Disks) configuration is enabled.

Technical Specifications - Audio

High Definition Audio	Type	Integrated
	High Definition Stereo Codec	Yes – Realtek ALC262
	Audio Jacks	Microphone-In (64-K ohm Input Impedance); front and rear stereo analog microphone ports available except for USDT and SFF, which has front stereo microphone only Line-In (64-K ohm Input Impedance) Line-Out * (200 ohms Output Impedance, expects at least a 10-K ohm load) Headphone-Out (1 Ohm Output Impedance, expects at least a 32 ohm load)
NOTE: * Internal Speaker Amplifier is for Internal Speaker only. External Speakers need to be powered externally. Rear audio ports are re-taskable as Line-in, Line-out, or Microphone-in.		
	Multistreaming Capable	Multistreaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/ from the front and rear jacks.
	Sampling	8 kHz – 192 kHz
	Waveable Syntheses (software)	Yes – Uses OS soft wavetable
	Analog Audio	Yes
	Number of Channels on Line-Out (mono/ stereo)	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	1.5 W
	Internal Speaker	Yes
	External Speaker Jack (Line-Out)	Yes

Technical Specifications - Communications

Integrated Intel 82566DM Gigabit Network Connection	Connector	RJ45
	Controller	Intel Nineveh Gigabit platform LAN Connect Networking Controller
	Memory	Integrated 96KbB on chip buffer memory
	Data rates supported	10/ 100/ 1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3 ab and 802.3u compliant,
	Bus architecture	GLCI, LCI interface. Intel specific MAC to PHY interface
	Data transfer mode	At gigabit GLCI (802.3 serdes) is for Data, LCI (parallel bus)for MDIO, at 10/ 100 LCI for both data and MDIO, GLCI is idle.
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	Require 3.3Vaux, 1.8V and 1.0V or just 3.3V with integrated regulators Power consumption 1.16 W atts for 82566, whole LOM 2.53 W atts
	ACBS	Intel Auto Connect Battery Saving feature
	Boot ROM support	Yes
	Network transfer mode	Full-duplex
		Half-duplex (not available for the 1000BASE-T transceiver)
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T (full-duplex) 2000 Mbps
	Environmental	Operating temperature 32° to 131°F (0° to 55° C) To 70° C for external regulator
		Operating humidity 85% at 131° F (55° C)
	Operating system driver support	Microsoft 2000, Microsoft XP
	Management capabilities	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic.
	Alerting	ASF 2.0 support

Intel PRO/ 1000 PT PCIe Gigabit NIC	Connector	RJ45
	Controller	Intel 82572EI Gigabit Ethernet Controller
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
	Data rates supported	10/ 100/ 1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E 1.0a
	Data transfer mode	Busmaster DMA
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS
		Mark for European Union



Technical Specifications - Communications

Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 W Watts in 100Base-T	
Boot ROM support	Yes	
Network transfer rate	10BASE-T (half-duplex) 10 Mbps	
	10BASE-T (full-duplex) 20 Mbps	
	100BASE-TX (half-duplex) 100 Mbps	
	100BASE-TX (full-duplex) 200 Mbps	
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)	
Environmental	Operating temperature	32° to 131°F (0° to 55° C)
	Operating humidity	85% at 131° F (55° C)
Dimensions	6.4 x 2.6 x 0.8 in (16.3 x 6.6 x 1.9 cm)	
Operating system driver support	Microsoft 2000, Microsoft XP	
Management capabilities	ASF, WOL, PXE, DMI, WFM 2.0.	

Agere 2006 PCI 56K International SoftModem	Data Transmission	Technology speeds: 56,000 Kbps maximum downstream data, controllerless
	NOTE: 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.	
	Data Speeds	(Upload only) 33,600/ 31,200/ 28,800/ 26,400/ 21,600/ 19,200/ 16,800/ 14,400/ 12,000/ 9,600/ 7,200/ 4,800/ 2,400/ 1,200/ 300
	Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
	Fax Speeds	14,400/ 12,000/ 9,600/ 7,200/ 4,800/ 2,400/ 1,200/ 300 b/s
	Fax Mode	ITU-T T.31 class 1 FAX, V.17, V.29, V.27ter, and V.21 Channel 2
	Capabilities	
	Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
	Power Management	ACPI; PPM1 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
	Upgradeability	Driver upgradeable for future enhancements
	Video	ITU-T V.80 video ready interface
	Other	TIA/ EIA 602 standard AT command set
		Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface
		Optional ring wakeup signal
	Operating Temperature	32° to 158° F (0° to 70° C)
	Operating Humidity	20% to 90% non-condensing
	Operating System Support	Microsoft Windows 2000 and Microsoft Windows XP
	OS Driver Support	Microsoft Windows 2000 and Microsoft Windows XP



Technical Specifications - Communications

Power	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/ request pair), one shared IRQ, one electrical load
Chipset	Agere Systems SV92PL – Integrated PCI interface with 5-V tolerant buffers and CardBus support
Dimensions (L X H)	Complies with PCI low profile specifications 6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
Connection	Single RJ11 connector
Other Features	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PhP ID support
Safety	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
EMC	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
Telecom	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
Health	Bare PCB material compliant to 94V0 or better (marked as such)
Other	PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant

Technical Specifications - Graphics

Integrated Graphics	3D/ 2D Controller	Microsoft DirectX® 9 based with support for Pixel Shader 2.0, 4:1 anisotropic filtering, Gaussian texture filtering, shadow maps, volumetric textures, double-sided stencil buffers, and 4 pixel pipes.
Media Accelerator 3000	VGA Controller	Integrated
	Bus Type	PCI Express™ x16 (If an external graphics card is installed in a PCI slot, the internal graphics can be enabled or disabled using the system's BIOS setup utility. If an external graphics card is installed in the PCI Express™ slot, the internal graphics cannot be enabled).
	RAMDAC	Integrated, 400 MHz
	Memory	Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed and system load. 8 MB is pre-allocated for graphics use at system boot time. Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVM T), to provide an optimal balance between graphics and system memory use.
		System memory equal or greater than 512 MB and less than 1024 MB 8 MB pre-allocated + 248 MB DVM T = max frame buffer of 256 MB
		System memory equal or greater than 1024 MB 8 MB pre-allocated + 376 MB DVM T = max frame buffer of 384 MB
	Controller Clock Speed	400 MHz
	Overlay Planes	Single overlay support with 5x3 filtering
	Maximum Color Depth	32 bits/ pixel
	Maximum Vertical Refresh Rate	85 Hz at up to 1920x1440, 85 Hz at 2048x1536. Varies with mode and configuration. See table below.
	Multi-display Support	Support for one CRT via the motherboard's VGA connector. Support for an additional DVI-D display via the optional DVI ADD2 card. Dual independent displays and dual synchronous (Twin or Clone mode) displays are supported.
	Operating Systems	Microsoft Windows XP and Windows 2000
	Graphics/ Video API Support	Microsoft DirectX®9, DirectXVA®, VMF9, GDI/ GDI+; OpenGL® 1.4.

Resolutions Supported ¹	Resolution	Maximum Refresh Rate (Hz)	
		Analog Monitor	Digital Monitor
	640 x 480	85	60
	800 x 600	85	60
	1024 x 768	85	60
	1280 x 1024	85	60
	1600 x 1200	85	60
	1920 x 1080	85	60
	1920 x 1200	85	60
	1920 x 1440	85	60
	2048 x 1536	85	60

¹ Modes listed are supported with a single active display. The supported mode list for multiple active displays is a subset of this



Technical Specifications - Graphics

list. Not all modes will support video playback and some supported modes may use software MC (motion compensation) rather than hardware MC. Not all modes will support 3D acceleration depending on the system configuration (e.g., resolution selected, size of frame buffer, number of installed memory modules, etc.).

NOTE: Other resolutions and refresh rates may be selectable but are not recommended.

DVI ADD2 Graphics	Models	DY674A Intel DVI ADD2 adapter			
	Form Factor	Low-profile card			
	DVID Connector	Compliant with DDW G (Digital Display W orking Group) and VESA specifications for a single-link digital DVI (DVI-D) connector.			
	Dual Head Support	Yes, when used with the integrated VGA connector			
	Display Devices Supported	HPL1530 HPL1740 HPL1755 HPL1940 HPL1955 HPL2035 HPL2335			
	NOTE: The DVI ADD2 card offers optimal performance with any display that meets applicable VESA standards.				
	Color Depth	All modes support 8-bpp, 16-bpp, and 24-bpp color depths (up to 16.7 million colors)			
	Host Interface Connector	Mechanically compliant with PCIe standard Complies with the Intel ADD2 and Intel Serial Digital Video Output (SDVO) specifications			
	Dot Clock	165 MHz maximum			
	Display Modes	Supports display modes that require up to 165-MHz bandwidth on the link, as shown in the following table.			
Resolution		60-Hz LCD	60-Hz	75-Hz	85-Hz
Blanking		5% reduced	GTF	GTF	GTF
640 x 480	VGA	Yes	Yes	Yes	Yes
800 x 600	SVGA	Yes	Yes	Yes	Yes
1024 x 768	XGA	Yes	Yes	Yes	Yes
1280 x 1024	SXGA	Yes	Yes	No	No
1600 x 1200	UXGA	Yes	Yes	No	No

ATI RADEON X1300 PCIe Graphics Card (256 MB)	Bus Type	PCI Express (x16 lanes)			
	Maximum Vertical Refresh Rate	85 Hz			
	Display Support	Integrated 400 MHz RAMDAC			
	Display Max Resolution	2048 x 1536			
	Board Display Options	DVI + TV DVI supports analog CRT or flat panel or digital flat panel (using DVI-A, DVI-D or DVI connector)			



Technical Specifications - Graphics

	DVH supports analog CRT or flat panel (with VGA connector and DVH to VGA dongle) TV connector is a 4-pin mini-DIN S-video connector	
Board Configuration	Specification	Description
128 MB Frame Buffer	Graphics Chip	RV515
	Core clock	450 MHz
	Memory clock	250 MHz
	Frame buffer	256 MB DDR2
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	
Operating Systems Support	Windows 2000, Windows XP	
Core Power	25 W (Max board power)	
Option kit contents	- ATI RADEON X1300 PCIe graphics card with full height bracket attached - Low profile bracket - DVI-to-VGA Adapter - Software CD with graphics drivers - Warranty documentation	
Compliance standards	EMC Emissions: a) FCC Part 15, Subpart B – Unintentional Radiators, Class B Computing Devices for Home & Office Use b) CISPR22: 1997/ EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment c) Canadian Standard ICES-003 is equivalent to CISPR22 d) Taiwanese Standard BSMI e) Japanese VCCI f) Australian C-Tick EMC Immunity: CISPR24:1997/ EN 55024:1998 – Information Technology Equipment - Immunity Characteristics – Limits and Methods of Measurement. Safety: UL60950 (USA) & EN 60950 (EU): Safety of Information Technology Equipment, Including Electrical Business Equipment. All boards meet UL PCB flammability requirements.	

ATI RADEON X1600XT (256 MB DH) FH PCIe Graphics Card	Bus Type	PCI Express (x16 lanes)
	Maximum Vertical Refresh Rate	85 Hz



Technical Specifications - Graphics

Display Support	Integrated 400 MHz RAMDAC	
Display Max Resolution	2560 x 1600 digital, 2048 x 1536 analog	
Board Display Options	2 DVH ports (one port supports dual link DVI). DVH supports an analog CRT or flat panel with a VGA connector via the provided DVH to VGA adapter 4-pin mini-DIN S-video connector for TV output	
Board Configuration	Specification	Description
	Graphics chip	RV530
	Core clock	590 MHz
	Memory clock	690 MHz
	Frame buffer	256 MB GDDR3, 128 bit wide
Operating Systems Support	Windows 2000, Windows XP	
Core Power	56 W (Max board power)	

NVIDIA Quadro NVS 280 64MB PCI Dual Head

Form Factor	Low profile (both ATX and low profile brackets included)	
Graphic Controller	Integrated Quadro 280 2-D graphics processor unit (GPU)	
Bus type	PCI	
RAMDAC	Dual 350 MHz integrated	
Memory	64 MB DDR with frame buffer and Texture storage	
Connector	Single High-density DMS59 Connector	
Dimensions	Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)	
Controller clock speed	250 MHz	
Color depth	32-bits/ pixel max	
Overlay planes	One 16-bit Video overlay plane	
Maximum vertical refresh rate	85 Hz	
Multi-monitor support	Dual analog or digital monitors	
Dual DVI Support	Yes (with kit DL139A)	
High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation	
Available graphics drivers	Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode)	

NOTE: HP qualified drivers may be preloaded or available from the HP support Web site:
http://welcome.hp.com/country/us/eng/software_drivers.html.

Analog Resolution	Maximum Colors Supported	Maximum Refresh Rate
640 x 480	16.7 M	240 Hz
800 x 600	16.7 M	240 Hz
1024 x 768	16.7 M	200 Hz
1600 x 1200	16.7 M	170 Hz



Technical Specifications - Graphics

1600 x 1200	16.7 M	150 Hz
1600 x 1200	16.7 M	100 Hz
1920 x 1200	16.7 M	85 Hz
1920 x 1200	16.7 M	85 Hz
1920 x 1440	16.7 M	75 Hz
2048 x 1536	16.7 M	60 Hz
Digital Resolution	Maximum Colors Supported	Maximum Refresh Rate
640 x 480	16.7 M	75 Hz
800 x 600	16.7 M	75 Hz
1024 x 768	16.7 M	75 Hz
1152 x 864	16.7 M	60 Hz
1280 x 1024	16.7 M	60 Hz
1600 x 1200	16.7 M	60 Hz (primary only)



Technical Specifications - Hard Drives

7200 rpm Serial ATA Hard Drives	250-GB	Capacity	250,059,350,016 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/ s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/ s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms
			Average	8.5 ms
			Full-Stroke	18 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	488,397,168	
		Operating Temperature	41° to 131° F (5° to 55° C)	
	160-GB	Capacity	163,928,604,672 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/ s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/ s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.9 ms
			Average	9.3 ms
			Full-Stroke	18 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	320,173,056	
		Operating Temperature	41° to 131° F (5° to 55° C)	
	80-GB	Capacity	80,026,361,856 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/ s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/ s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
			Average	9.3 ms
			Full-Stroke	21 ms
		Rotational Speed	7,200 rpm	



Technical Specifications - Hard Drives

Logical Blocks	156,301,488
Operating Temperature	41° to 131° F (5° to 55° C)

Technical Specifications - Input/Output Devices

USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		System interface	USB Type A plug connector
		ESD	CE level 4, 15-kV air discharge
		EMI – RFI	Conforms to FCC rules for a Class B computing device
		Microsoft® PC 99 – 2001	Functionally compliant
		Microsoft® PC 99 – 2001	Functionally compliant
	Mechanical	Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 – 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
	Environmental	Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Operating system support	Windows 2000 and Windows XP	
		Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
		Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS
		Kit contents	Keyboard, installation guide, warranty card, safety and comfort guide

PS/2 Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
------------------------	--------------------------	------	---



Technical Specifications - Input/Output Devices

Electrical	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC $\pm$ 5%
	Power consumption	50 mA maximum (with three LEDs ON)
	System interface	PS/ 2 6-pin mini din connector
	ESD	CE level 4, 15 kV air discharge
Mechanical	EMI – RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 – 2001	Functionally compliant
	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
Environmental	Switch type	Contamination-resistant switch membrane
	Keyleveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 – 2001	Mechanically compliant
	Acoustics	43 dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
Operating system support	Microsoft Windows 2000 and Windows XP	
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
Kit contents	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort guide	

HP USB Smartcard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Form factor	USB basic Smart Card keyboard
		Colors	Carbonite/ Silver
		Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)



Technical Specifications - Input/Output Devices

Electrical	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC $\pm$ 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
Mechanical	EMI – RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 – 2001	Functionally compliant
	Languages	30+ available
	Keycaps	Low-profile design
	Switch actuation	55 g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
Environmental	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
SMARTCARD function	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Support	All ISO 7816 smart cards
	Interface	Reads from and writes to all ISO 7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	Chipset	SCM STCII
	Standard APIs supported	PC/ SC, EMV2000, SET
	Power	USB Port
		Short circuit detection (protects smart card and reader)
		Power supply compliant with ISO 7816 and EMV (5V, 60 mA)
	Power consumption	Supports 3-V and 5-V cards
		250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA

Technical Specifications - Input/Output Devices

		Communication	maximum startup current using a high-current, 60-mA smart card) From card	Programmable from 9,600 baud to 115,200 baud
		Landing mechanism	From computer Contact device	Up to 38,400 baud Friction contact
			Card insertions rating	Up to 100,000 insertion cycles
		Interface modes	USB communications through USB port SCM protocol Automatic card insertion/ removal detection	
		Reader performance interface	USB connection	
		Electro-magnetic standards	Europe USA	89/ 336/ CEE guideline USAFCC part 15
USB Standard BG1650 Keyboard (gray)	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)	
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)	
		Weight	2 lb (0.9 kg) minimum	
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%	
		Power consumption	50-mA maximum (with three LEDs ON)	
		System interface	USB Type A plug connector	
		ESD	CE level 4, 15-kV air discharge	
		EMI – RFI	Conforms to FCC rules for a Class B computing device	
	Mechanical	Microsoft PC 99 – 2001	Functionally compliant	
		Languages	38 available	
		Keycaps	Low-profile design	
		Switch actuation	55-g nominal peak force with tactile feedback	
		Switch life	20 million keystrokes (using Hasco modified tester)	
		Switch type	Contamination-resistant switch membrane	
		Keyleveling mechanisms	For all double-wide and greater-length keys	
		Cable length	6 ft (1.8 m)	
	Environmental	Microsoft PC 99 – 2001	Mechanically compliant	
		Acoustics	43-dBA maximum sound pressure level	
		Operating temperature	50° to 122° F (10° to 50° C)	
		Non-operating temperature	-22° to 140° F (-30° to 60° C)	
		Operating humidity	10% to 90% (non-condensing at ambient)	
		Non-operating humidity	20% to 80% (non-condensing at ambient)	
		Operating shock	40 g, six surfaces	



Technical Specifications - Input/Output Devices

		Non-operating shock	80 g, six surfaces	
		Operating vibration	2-g peak acceleration	
		Non-operating vibration	4-g peak acceleration	
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
	Operating system support	Windows 2000 and Windows XP		
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, BG Prufert Mark		
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS		
	Kit contents	Keyboard, installation guide, warranty card, safety and comfort guide		
HP PS/ 2 Scroll Mouse	Dimensions	3.8 x 6.3 x 11.6 cm (1.5 x 2.5 x 4.6 in)		
	Weight	4.44 oz (126 g)		
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)	
		Non-operating temperature	22° to 140° F (30° to 60° C)	
		Operating humidity	10% to 90% (non condensing at ambient)	
		Non-operating humidity	20% to 80% (non condensing at ambient)	
		Operating shock	40 g, 6 surfaces	
		Non-operating shock	80 g, 6 surfaces	
		Operating vibration	2 g peak acceleration	
		Non-operating vibration	4 g peak acceleration	
		Drop (out of box)	26 in (66 cm) on carpet, 6-drop sequence	
		Drop (out of box)	1 m on asphalt tile over concrete, 6-drop sequence	
		Electrical	Operating voltage	5 VDC ± 10%
	Power consumption		15 mA	
	System consumption		PS/ 2 mini-din connector	
	ESD		CE level 4, 15 kV air discharge	
	EMI/RFI		Conforms to FCC rules for a Class B computing device	
	Microsoft PC99 – 2001		Functionally compliant	
	Mechanical	Resolution	400 ± 20% DPI	
		Tracking speed	10 in/ s (25.4 cm/ s) maximum	
		Acceleration	100 in/ s ² (2.54 m/ s ²)	
		Switch actuation	65 g nominal peak force	
		Switch life	1,000,000 operations (using Hasco modified tester)	
		Switch type	Low force micro-switches	
		Tracking mechanism life	155 mi (250 km) at average speed of 10 in/ s	
		Cable length	6 ft (1.8 m)	



Technical Specifications - Input/Output Devices

		Microsoft PC99 – 2001	Mechanically compliant		
	Scroll wheel	W idth	8 mm		
		Diameter	0.99 in (25.2 mm)		
		Maximum rotation speed	30 mm/ s		
		Switch type	Light force micro-switch		
		Switch life	1 million operations		
		Mechanical life	Minimum 200,000 revolutions		
	Regulatory approvals	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC		
	Compatibility	Operating system support	Windows 2000 and W indows XP		
HP PS/ 2 Optical Scroll Mouse	Dimensions (H x Lx W)	3.95 x 6.21 x 11.7 cm (1.56 x 2.44 x 4.61 in)			
	W eight	4.44 oz (126 g)			
	Environmental	Operating temperature	-32° to 104°F (0° to 40° C)		
		Non-operating temperature	-4° to 140°F (-20° to 60° C)		
		Operating humidity	10%to 90%(non condensing at ambient)		
		Non-operating humidity	10%to 90%non condensing		
		Operating shock	40 g, 6 surfaces		
		Non-operating shock	80 g, 6 surfaces		
		Operating vibration	2 g peak acceleration		
		Non-operating vibration	4 g peak acceleration		
		Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face		
		Electrical	Operating voltage	5 VDC ± 10%	
			Power consumption	100mA	
			System consumption	PS/ 2 mini-din connector	
	ESD		CE level 4, 15 kV air discharge		
	EMI/RFI		Conforms to FCC rules for a Class B computing device		
	Mechanical		Microsoft PC99 – 2001	Functionally compliant	
		Resolution	400 ± 20%DPI		
		Tracking speed	10 in/ s (25.4 cm/ s) maximum		
		Acceleration	100 in/ s/ s (2.54 m/ s/ s)		
		Switch actuation	61 g nominal peak force		
		Switch life	3,000,000 operations (using Hasco modified tester)		
		Switch type	Low force micro-switches		
		Tracking mechanism life	155 mi (250 km) at average speed of 10 in/ s		
		Cable length	6 ft (1.8 m)		



Technical Specifications - Input/Output Devices

Scroll wheel	Microsoft PC99 – 2001	Mechanically compliant
	Width	8 mm
	Diameter	1.01 in (25.6 mm)
	Maximum rotation speed	48 rats/ sec
	Switch type	Light force micro-switch
	Switch life	1 million operations
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions
	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
	Operating system support	Windows 2000 and Windows XP
HP USB Optical Scroll Mouse	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 in (185 cm)
	System requirements	Microsoft Windows 95, 98, 2000, Me, and XP Available USB port



Technical Specifications - Optical Storage

SATA DVD+/-RW LightScribe Drive	Height	5.25-inch, half-height, tray-load
	Orientation	Either horizontal or vertical
	Interface type	SATA/ ATAPI
	Disc capacity	8.5 GB DL or 4.7 GB standard
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)
	Weight (max)	2.6 lb (1.2 kg)
	Write speeds	DVD+R Up to 16X
		DVD+RW Up to 8X
		DVD+R DL Up to 8X
		DVD-R DL Up to 4X
		DVD-R Up to 16X
		DVD-RW Up to 6X
		CD-R Up to 48X
		CD-RW Up to 32X
	Read speeds	DVD-RAM Up to 16X
		DVD+RW, DVD-RW, DVD+R DL, DVD-R DL Up to 8X
		DVD-ROM, DVD+R, DVD-R Up to 16X
		CD-ROM, CD-R Up to 48X
		CD-RW Up to 32X
	Access time (typical reads, including settling)	Random DVD: < 130 ms (typical), CD: < 120 ms (typical)
		Full Stroke DVD: < 240 ms (seek), CD: < 200 ms (seek)
	Power	Source SATA DC power receptacle
		DC Power Requirement 5 VDC $\pm$ 5% 100 mV ripple p-p 12 VDC $\pm$ 5% 200 mV ripple p-p
		DC Current 5 VDC (< 1000 mA typical, 1600 mA maximum) 12 VDC (< 600 mA typical, 1400 mA maximum)
	Environmental conditions (operating – non-condensing)	Temperature 41° to 122° F (5° to 50° C)
		Relative Humidity 10% to 90%
		Maximum Wet Bulb 86° F (30° C)
		Temperature
	Operating systems support	Microsoft Windows 2000, Windows XP Professional, Windows XP Home

SATA DVD-ROM Drive	Height	5.25-inch, half-height, tray-load
	Orientation	Either horizontal or vertical
	Interface type	SATA/ ATAPI



Technical Specifications - Optical Storage

Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)		
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
W eight (max)	2.6 lb (1.2 kg)		
Read speeds	DVD+R/-R/+RW / -RW / +R DL/-R DL	Up to 8X	
	DVD-ROM	Up to 16X	
	DVD-RAM	Up to 4X	
	CD-ROM, CD-R	Up to 48X	
	CD-RW	Up to 32X	
Removable Storage – Media Compatibility – DVD-ROM	Media	Read	W rite
	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)	
	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)	
	Cache Buffer	2 MB (minimum)	
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/ s); ATA Multi-word DMA mode 2 (16.7 MB/ s); ATA UltraDMA Mode 3 (44.4 MB/ s -default)	
Power	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%100 mV ripple p-p 12 VDC ± 5%200 mV ripple p-p	
	DC Current	5 VDC – <1000 mA typical, < 1600 mA maximum	
		12 VDC —< 600 mA typical, < 1400 mA maximum	
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
	Relative Humidity	10%to 90%	
	Maximum W et Bulb Temperature	86° F (30° C)	
	Operating systems	Microsoft W indows 2000, W indows XP Professional, W indows XP Home	



Technical Specifications - Optical Storage

support

SATA CD-RW / DVD-ROM Combo Drive	Height	5.25-inch, half-height, tray-load	
	Orientation	Either horizontal or vertical	
	Interface type	SATA/ ATAPI	
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)	
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
	Weight (max)	2.6 lb (1.2 kg)	
	Write speeds	CD-R	Up to 48X
		CD-RW	Up to 32X
		DVD+R/-R/+RW/-RW/+RDL/-RDL	Up to 8X
	Read speeds	DVD-ROM	Up to 16X
		CD-ROM, CD-R	Up to 48X
		CD-RW	Up to 32X
	Access time (typical reads, including settling)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
		Full Stroke	DVD: < 250 ms (typical), CD: < 210 ms (typical)
	Power	Source	SATA DC power receptacle
		DC Power Requirement	5 VDC $\pm$ 5% 100 mV ripple p-p 12 VDC $\pm$ 5% 200 mV ripple p-p
			5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
		DC Current	
	Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
		Relative Humidity	10% to 90%
		Maximum Wet Bulb Temperature	86° F (30° C)
	Operating systems support	Microsoft Windows 2000, Windows XP Professional, Windows XP Home	

CD-ROM Drive	Interface	SATA	
	Data Transfer Rate	Variable (Audio CD) – 1,800 to 3,600 KB/ s (24X) Max	Variable (CD-ROM, CD-R) – 2,400 to 7,200 KB/ s (48X) Max
	Access Time (ms)	Random: <125 ms	Full-stroke seek: <210 ms
	Data Buffer	2MB	
	Disk Formats Read	CD-ROM Mode 1, CD-ROM XA (Mode 2, Form 1 and 2), CD Digital Audio, CD-EXTRA, CD-I (Mode 2, Form 1 and 2) and CD-I Ready, CD-	



Technical Specifications - Optical Storage

	Text, CD-Bridge, Photo CD (Single and Multi Session), Video CD, CD-R and CD-RW Multi-Session
Disk Formats Written	None
Disk Capacity (CD)	180 MB, 540 MB, 650 MB, and 700 MB
Block Size	Mode 1-2,048, 2,352 bytes Mode 2-1, 2,048, 2,328, 2,336, 2,340, 2,353 bytes Mode 2-2, 2,328, 2,336, 2,340, 2,352 bytes CD-DA-2,352, 2,368 bytes
Diameter	12 cm; 8 cm
Thickness	1.2 mm
Track Pitch	1.6 μ m
Audio Output Level	Line-out 0.7 V @ 47 Kohm
Startup Time	<7 seconds (typical); < 30 seconds with multi-session
Operating Conditions	Temperature 41° to 122° F (5° to 50° C) Relative Humidity 10% to 90%
Dimensions (H x W x D, maximum)	1.7 x 5.9 x 8.0 in (4.3 x 15.0 x 20.3 cm)
Weight	2.6 lb (1200 g)
Operating Systems Supported	Microsoft Windows 2000, Windows XP Professional, Windows XP Home

PATA DVD+/ -RW LightScribe Slim Drive	Height	5.25-inch, half-height, tray-load
	Orientation	Either horizontal or vertical
	Interface type	ATAPI/ EIDE
	Disc recording capacity	Up to 8.5 GB DL or 4.7 GB standard
	Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)
	Weight (max)	0.42 lb (190 g)
	Write speeds	DVD+R Up to 8X
		DVD+RW Up to 8X
		DVD+RDL Up to 4X
		DVD-R Up to 8X
		DVD-RW Up to 6X
		CD-R Up to 24X
	Read speeds	CD-RW Up to 16X
		DVD+RW, DVD-RW, DVD-ROM, DVD+R, DVD-R Up to 8X
		DVD-RDL Up to 4X
		CD-ROM, CD-R Up to 24X
		CD-RW Up to 24X
	Access time (typical reads, including)	Random DVD: < 140 ms (typical), CD: < 125 ms (typical)



Technical Specifications - Optical Storage

settling)	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Stop Time	< 4 seconds
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/ s); ATA Multi-word DMA mode 2 (16.7 MB/ s); ATA UltraDMA Mode 3 (44.4 MB/ s – default)
Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC $\pm$ 5%100 mV ripple p-p 12 VDC $\pm$ 5%200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, 1600 mA maximum) 12 VDC (< 600 mA typical, 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 W att
	Line-Out	0.7 VRMS
Audio output	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
	Channel Separation	65 dB
Environmental conditions (operating – non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)
	Operating systems support	Microsoft Windows 2000, Windows XP Professional, Windows XP Home

PATA CD-RW / DVD-ROM Combo Slim Drive	Height	12.7 mm height slim CD-RW
	Orientation	Either horizontal or vertical
	Interface type	PATA/ ATAPI
	Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM)
	Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)
	Weight (max)	0.42 lb (190 g)
	Write speeds	CD-R Up to 24X
		CD-RW Up to 24X
	Read speeds	DVD+R / -R / +RW / -RW / +RDL / -RDL Up to 4X
		DVD-ROM Up to 8X
		CD-ROM, CD-R Up to 24X
		CD-RW Up to 24X
	Access time (typical reads, including settling)	Random DVD DVD: < 140 ms (typical), CD: < 125 ms (typical)
		Random CD DVD: < 250 ms (typical), CD: < 210 ms (typical)



Technical Specifications - Optical Storage

	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4); ATA Multi-word DMA mode 2; ATA UltraDMA mode 0; ATA UltraDMA mode 1, mode 2; ATA UltraDMA Mode 3 (default)
	Power	
	Source	Fourpin, DC power receptacle
	DC Power Requirement	5 VDC $\pm$ 5%100 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
	Audio output level	0.7 Vrms (typical)
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	5% to 85%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)
	Operating systems support	Microsoft Windows 2000, Windows XP Professional, Windows XP Home

PATA DVD-ROM Slim Drive	Height	12.7mm
	Orientation	Either horizontal or vertical
	Interface type	PATA/ ATAPI
	Dimensions (W x H x D)	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)
	Weight (max)	0.42 lb (190 g)
	Read speeds	DVD+R/-R/+RW / Up to 4X -RW / +RDL/-RDL
		DVD-ROM Up to 8X
		CD-ROM, CD-R Up to 24X
		CD-RW Up to 24X
	Access time (typical reads, including settling)	Random DVD DVD: < 140 ms (typical), CD: < 125 ms (typical)
		Random CD DVD: < 250 ms (seek), CD: < 210 ms (seek)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/ s); ATA Multi-word DMA mode 2 (16.7 MB/ s)
	Power	
	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC $\pm$ 5%100 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
	Total Drive Power (standby mode)	< 2.5 Watt
	Audio output	Line-Out 0.7 VRMS
	Signal-to-Noise Ratio	74 dB



Technical Specifications - Optical Storage

Environmental (all conditions non-condensing)	Channel Separation	65 dB
	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	5% to 85%
	Maximum Wet Bulb	86° F (30° C)
	Temperature (operating)	
Operating systems support Microsoft Windows 2000, Windows XP Professional, Windows XP Home		



Technical Specifications - Removable Storage

HP 16-in-1 Media Card Reader	USB Interface	USB 2.0 High-speed device
	Advance protocol support	Supports hardware ECC (Error Correction Code) function
		• Supports hardware CRC (Cyclic Redundancy Check) function • Supports MS 4-bit parallel transfer mode • Supports MS-PRO 4-bit parallel transfer mode • Supports SD 4-bit parallel transfer mode • Supports high-speed 50-MHz SD 4-bit card (version 1.1) • Support high-speed 52-MHz MMC 8-bit card
	Supported media type with card adapter	• MicroSD (T-Flash) • Memory Stick Micro
Mechanical		
Environmental	Operational	Test Parameters/ Conditions – Power applied, unit operating on system $\pm 5\%$ nominal supply voltage.
	Environmental Extremes	
		10°C 10% RH. • 24 hours 10°C 90% RH. • 24 hours 20°C 90% RH. • 24 hours 30°C 90% RH. • 24 hours 40°C 90% RH. • 24 hours 50°C 90% RH. • 24 hours 50°C 10% RH. • 24 hours
	Storage Environmental Extremes	Test Parameters/ Conditions 60°C @ 80% RH. for 96 hours -30°C @ 20% RH. for 48 hours No power applied Delta °C < 1.0°C/ min Delta %RH. < 1.5% RH./ min
	Operating system support	Microsoft Windows 2000 (Service Pack 3 or greater), Windows XP Home, Windows XP Professional
	Approvals	USBIF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.2 FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T

Technical Specifications - Environmental Data

Eco-Label Certifications & declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- Blue Angel
- US Federal Energy Management Program (FEMP)
- Taiwan Green Mark
- China Energy Conservation Program
- IT ECO declaration
- Korea Eco-label
- EPEAT
- Japan PC Green label*

* NOTE: This product conforms to the examination standards (2003 version) under JETTA's 'PC Green Label System.'

Ultra-slim Desktop

Longevity and Upgrading This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/ or components contained in the product may include:

- Intel LGA775 processor socket
- 8 USB ports
- 1 empty PCI slot (w/ optional PCI riser card) , or
1 empty PCIe x16 slot (w/ optional PCIe riser card)
- 1 internal drive slot
- 1 Slimline optical drive slot
- 3 memory slots
- 1 Serial/ Parallel Port (optional)

Spare parts are available throughout the warranty period and or for up to 5 years after the end of production.

Batteries This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information • This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive



Technical Specifications - Environmental Data

- 2002/ 95/ EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/ 96/ EC.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO 1043.
- This product contains 0% recycled materials (by wt.)
- This product is 90% recyclable when properly disposed of at end of life.

Small Form Factor

Longevity and Upgrading This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/ or components contained in the product may include:

- Intel LGA775 processor socket
- 8 USB ports
- 2 empty PCI slots (2 low profile or 2 full-height with optional riser)
- 1 empty PCIe x1 slot
- 1 empty PCIe x16 slot
- 1 internal drive slot
- 1 SATA optical drive slot
- 4 memory slots
- 1 Serial Port (optional)
- 1 external diskette drive (optional)

Spare parts are available throughout the warranty period and or for up to 5 years after the end of production.

Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/ 95/ EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/ 96/ EC.



Technical Specifications - Environmental Data

- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO 1043.
- This product contains 0% recycled materials (by wt.)
- This product is 74% recyclable when properly disposed of at end of life.

Convertible Minitower

Longevity and Upgrading This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/ or components contained in the product may include:

- Intel LGA775 processor socket
- 8 USB ports
- 4 empty PCI slots (2 standard, 2 optional)
- 1 empty PCIe x1 slot
- 1 empty PCIe x16 slot
- 2 internal drive slots
- 3 external SATA drive slots
- 4 memory slots
- 1 Serial Port (optional)
- 1 external diskette drive (optional)

Spare parts are available throughout the warranty period and or for up to 5 years after the end of production.

Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000ppm by weight.

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/ 95/ EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/ 96/ EC.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO 1043.
- This product contains 0% recycled materials (by wt.)



Technical Specifications - Environmental Data

- This product is 90% recyclable when properly disposed of at end of life.

Ultra-slim Desktop, Small Form Factor, Convertible Minitower

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. From July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.



Technical Specifications - Environmental Data

- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information For more information about HP's commitment to the environment:
 [link to new HP white paper now in progress]
 Global Citizenship Report
<http://www.hp.com/hpinfo/globalcitizenship/qcreport/index.html>
 Eco-label certifications
<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>
 ISO 14001 certificates:
<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

© Copyright 2006 Hewlett-Packard Development Company, L.P.
 The information contained herein is subject to change without notice.

Intel and Pentium are U.S. registered trademarks of Intel Corporation. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

