


 **Pb leadfree**

DATE: Oct 15th 2009

FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☒ NO.

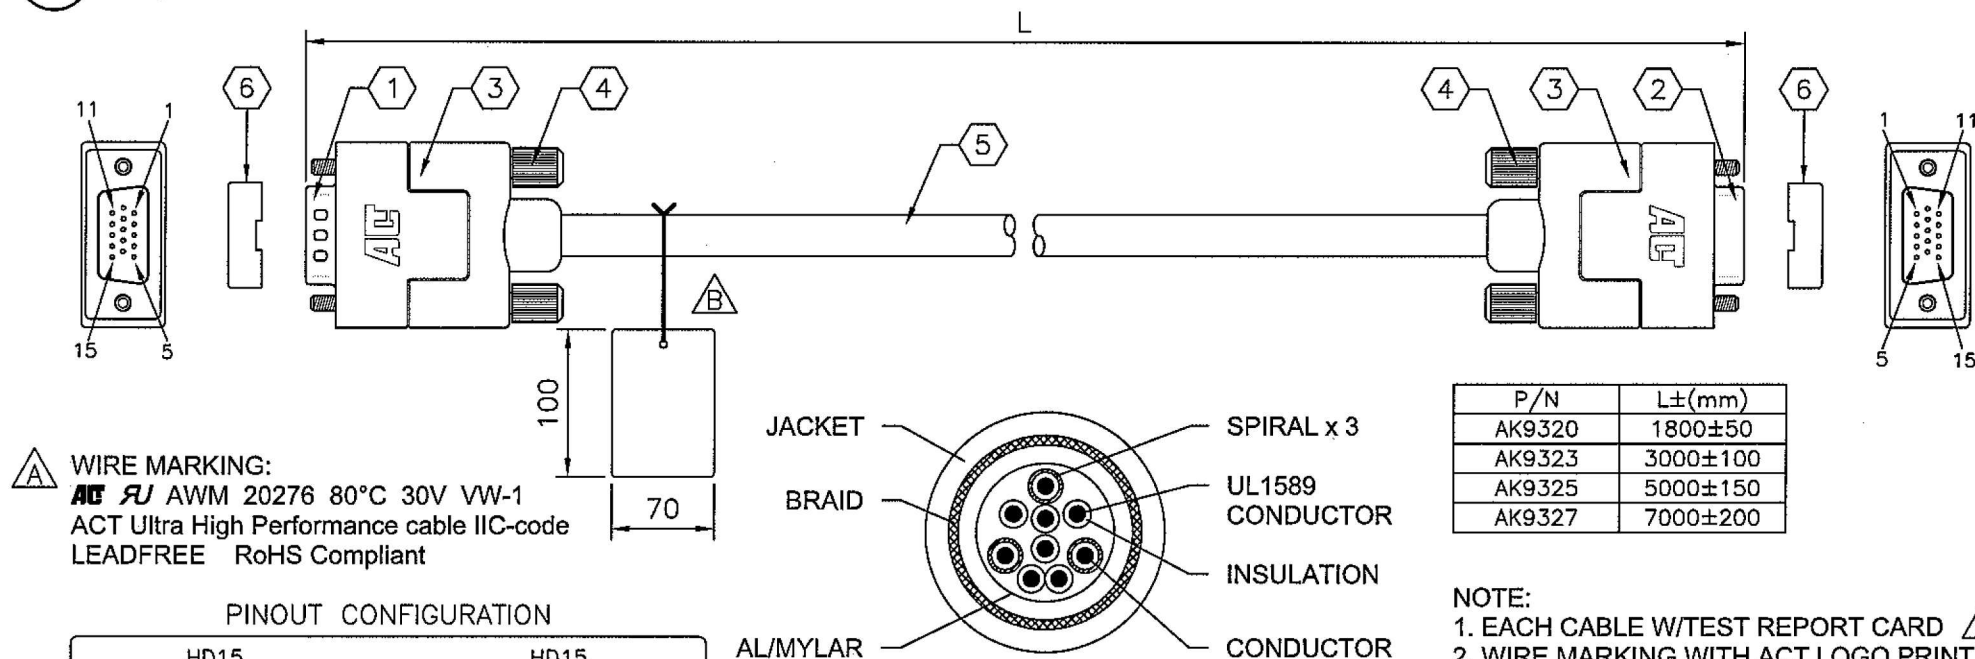

P/N	L±(mm)
AK9320	1800±50
AK9323	3000±100
AK9325	5000±150
AK9327	7000±200

1. EACH CABLE W/TEST REPORT CARD 
2. WIRE MARKING WITH ACT LOGO PRINTING
3. PE BAG WITH BARCODE LABEL
4. SMOOTH JACKET, OD=8.0mm

UNIT: mm

HD15 MALE		HD15 FEMALE	
1	RED CEN.	1	
2	GRN CEN.	2	
3	BLUE CEN.	3	
6	RED GND.	6	
7	GRN GND.	7	
8	BLUE GND.	8	
5	WHITE	5	
4,10,11		4,10,11	
9	ORANGE	9	
12	GREEN	12	
13	BROWN	13	
14	BLACK	14	
15	YELLOW	15	
SHELL	BRAID	SHELL	

	ITEM	DESCRIPTION	QTY.	UNIT
*	1	HD15 MALE CONNECTOR W/GOLD PLATED PINS & SHELL	1	PCS.
*	2	HD15 FEMALE CONNECTOR W/GOLD PLATED PINS & SHELL	1	PCS.
*	3	PAT. NO.:US 6,287,148 B1 RF-BLOK™ MATT BLACK	2	PCS.
		NICKEL PLATED+RECESSED ACT LOGO	2	PCS.
	4	BLACK #4/40 THUMBSCREW	4	PCS.
*	5	UL20276 (28AWG COAX+SPIRAL)x3C+(28AWG WIRE)x6C	SEE	DWG.
		+AL/MYLAR+85% BRAID OVERALL;		
		BLACK PVC "SMOOTH" JACKET, OD=ø8.0mm		
	6	TRANSPARENT PROTECTION CAP	2	PCS.

	REVISED DETAILS		REVISED BY
REV.	DESCRIPTION	DATE	
A	CHANGE WIRE MARKING	AUG.03.09	STANLEY
B	ADD TEST REPORT CARD	SEP.16.09	STANLEY

Part Number:	Revision:
SEE TABLE	B
RFQ number:	Drawing#: 98072213
Drawn by: STANLEY	Scale: None
Checked by:	Date: 07/22/2009

AL

SALES:	LILIAN
--------	--------


ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT



CUSTOMER'S APPROVAL: _____

DATE: Oct. 16th, 2009


FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☒ NO.

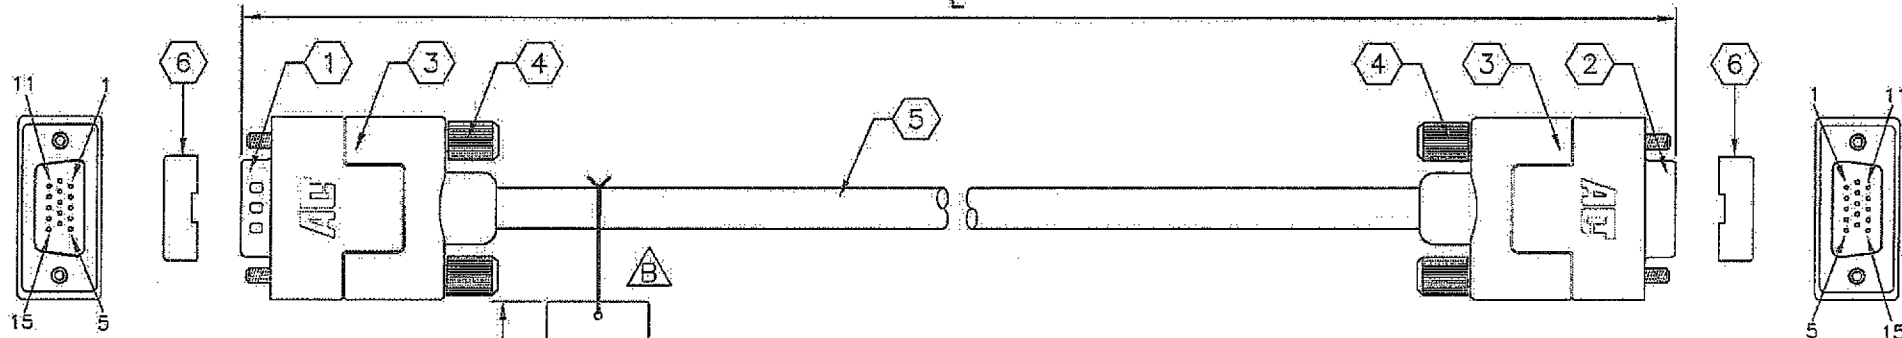

△ WIRE MARKING:
AWM 20276 80°C 30V VW-1
 ACT Ultra High Performance cable IIC-code
 LEADFREE RoHS Compliant

PINOUT CONFIGURATION

HD15 MALE		HD15 FEMALE
1	RED CEN.	1
2	GRN CEN.	2
3	BLUE CEN.	3
6	RED GND.	6
7	GRN GND.	7
8	BLUE GND.	8
5	WHITE	5
4,10,11		4,10,11
9	ORANGE	9
12	GREEN	12
13	BROWN	13
14	BLACK	14
15	YELLOW	15
SHELL	BRAID	SHELL

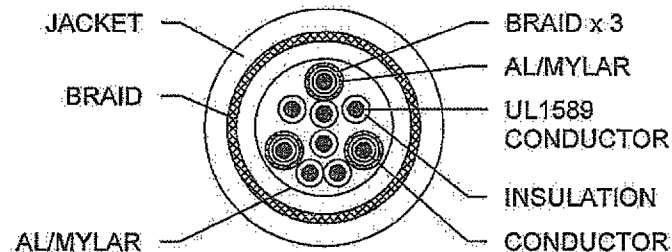

P/N	L±(mm)
AK9329	10000±250
AK9331	15000±250
AK9333	20000±250
AK9335	25000±250
AK9337	30000±250

NOTE:
 1. EACH CABLE W/TEST REPORT CARD **△**
 2. WIRE MARKING WITH ACT LOGO PRINTING
 3. PE BAG WITH BARCODE LABEL
 4. SMOOTH JACKET, OD=8.0mm

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
* 1	HD15 MALE CONNECTOR W/GOLD PLATED PINS & SHELL	1	PCS.
* 2	HD15 FEMALE CONNECTOR W/GOLD PLATED PINS & SHELL	1	PCS.
* 3	PAT. NO.:US 6,287,148 B1 RF-BLOK™ MATT BLACK	2	PCS.
	NICKEL PLATED+RECESSED ACT LOGO	2	PCS.
4	BLACK #4/40 THUMBSCREW	4	PCS.
* 5	UL20276 (28AWG COAX+AL/MYLAR+65% BRAID)x3C +(28AWG WIRE)x6C+AL/MYLAR+85% BRAID OVERALL; BLACK PVC "SMOOTH" JACKET, OD=ø8.0mm	SEE	DWG.
6	TRANSPARENT PROTECTION CAP	2	PCS.

REVISED DETAILS			REVISED BY	Part Number:	Revision:	ACT	
REV.	DESCRIPTION	DATE	BY	SEE TABLE	B		
A	CHANGE WIRE MARKING	AUG.03.09	STANLEY	RFQ number:	Drawing#: 98072214		
B	ADD TEST REPORT CARD	SEP.16.09	STANLEY	Drawn by: STANLEY	Scale: None		
				Checked by:	Date: 07/22/2009	SALES: LILIAN	