


## Console Modules

### Diagram



(KA9222A)

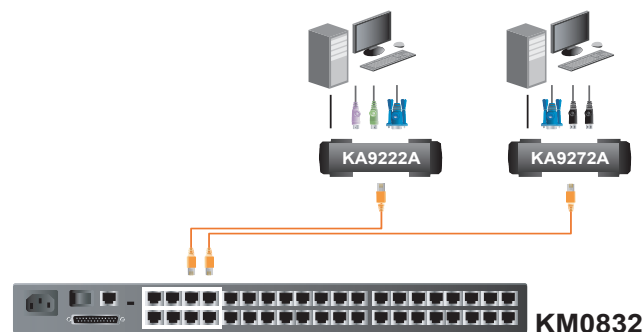


(KA9272A)



■ PS/2 console support (KA9222A)



■ USB console support (KA9272A)



■ PS/2 local computer support (KA9222A)



■ USB local computer support (KA9272A)

### Features

- One console module can control a local computer and a matrix KVM switch
- Local-user operation—access any server on the same switch
- Master-user operation—access all servers on the matrix KVM switch installation
- Control servers regardless of differences in monitor, keyboard, and mouse interfaces
- Auto Signal Compensation (ASC)—no DIP switch setting necessary to compensate for distance
- Superior video quality—support resolutions of up to 1024 x 768 within a distance of up to 150m(KM0216/KM0432), 300m(KM0832); DDC2B
- Lifetime flash firmware upgrades

### Specifications

| Function             |                        |          | KA9222A                            | KA9272A                       |
|----------------------|------------------------|----------|------------------------------------|-------------------------------|
| Computer Connections |                        |          | 1                                  |                               |
| Console Connections  |                        |          | 1                                  |                               |
| Connectors           | Console Ports          | Keyboard | 1 x 6-pin Mini-DIN Female (Purple) | 1 x USB Type A Female (White) |
|                      |                        | Video    | 1 x HDB-15 Female (Blue)           |                               |
|                      |                        | Mouse    | 1 x 6-pin Mini-DIN Female (Green)  | 1 x USB Type A Female (White) |
|                      | KVM Ports              |          | 1 x SPHD-15 Female (Yellow)        | 1 x SPHD-15 Female (Green)    |
|                      | Link                   |          | 1 x RJ-45 Female                   |                               |
|                      | Power                  |          | 1 x DC Jack                        |                               |
| Switches             | Select                 |          | 1 x Pushbutton                     |                               |
| LEDs                 | Link                   |          | 1 (Green)                          |                               |
|                      | Local                  |          | 1 (Orange)                         |                               |
| Environment          | Operating Temp.        |          | 0–50°C                             |                               |
|                      | Storage Temp.          |          | -20–60°C                           |                               |
|                      | Humidity               |          | 0–80% RH, Non-condensing           |                               |
| Physical Properties  | Housing                |          | Metal                              |                               |
|                      | Weight                 |          | 0.73 kg                            | 0.78 kg                       |
|                      | Dimensions (L x W x H) |          | 20.00 x 7.45 x 4.20 cm             | 20.00 x 7.45 x 4.20 cm        |

\* The specifications and pictures are subject to change without notice.