
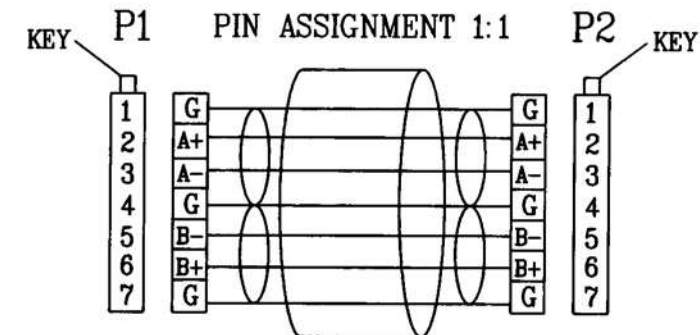


LTR	REV.	DESCRIPTION	DATE

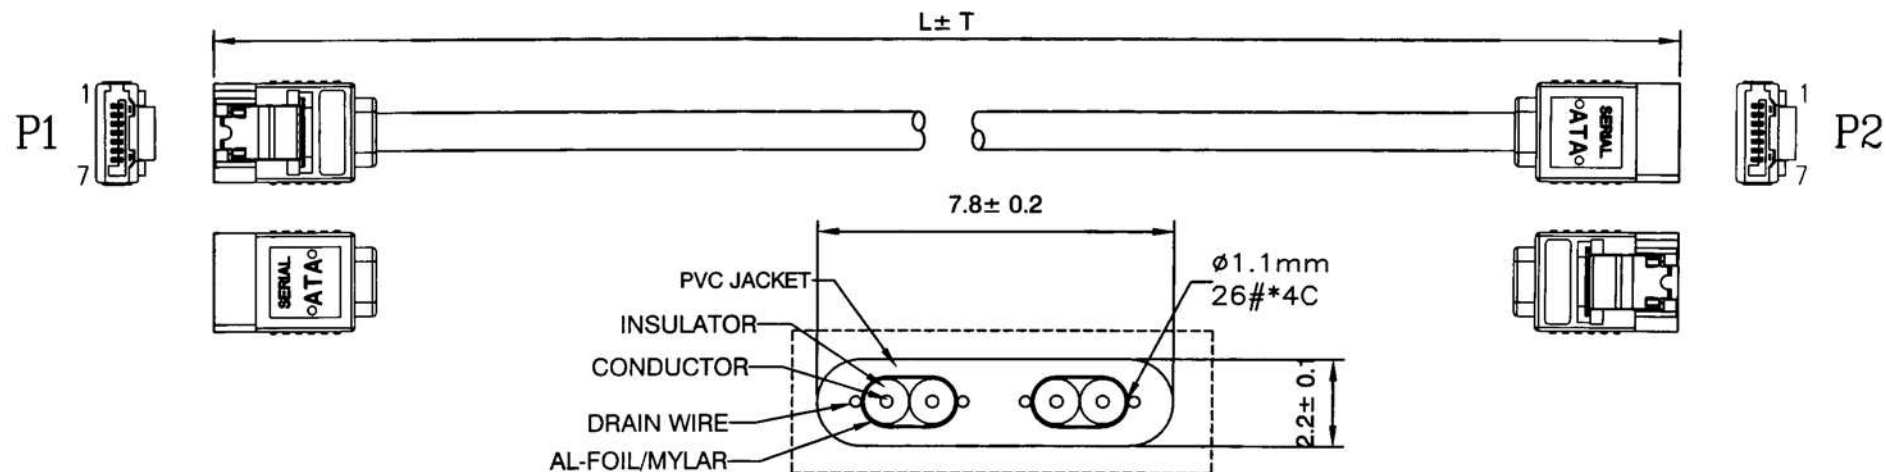

NOTE:

- CABLE:
UL2725 80°C 30V [26AWG(1/0.404)*2F+AL/MY+DRAIN WIRE(1/0.32)*2]TIN
INS: FOAM-PE OD: $\phi 1.1 \pm 0.05$ mm PVC JACKET OD: $\phi (2.2 \pm 0.1) * (7.8 \pm 0.2)$ mm
COLOR: RED (PANTONE 200C) IMPEDANCE: 100 ± 5 OHM
- CONNECTOR: P1 & P2: SATA 7P GOLD FLASH CONTACT, W/METAL LATCH
- HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)
- CABLE ASS'Y ELECTRICAL TEST:
4-1 100% OPEN SHORT & MIS WIRE TEST
4-2 CONTACT RESISTANCE 3 OHM MAX
4-3 INSULATION RESISTANCE 10M OHM MIN
- PACKING: EACH PC / POLYBAG.

111801	1000	20
111800	500	10
Item No.	L(mm)	T(mm)

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05



SATA Flat Cable intern 2x 7pin/Male
with Metal Latch