


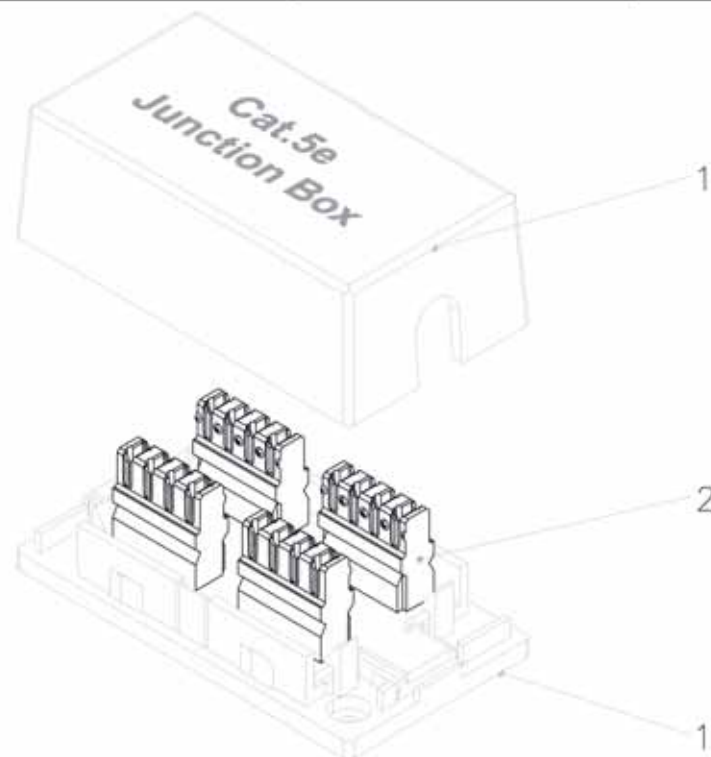

SCALE 1/1


Specification :



Material :


1. Box : ABS, UL 94V-0, with white color.
2. IDC :
 - 2-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 2-2. Phosphor Bronze with Tin plated.
3. PCB : FR4, UL 94V-0.

Performance :

- a. T568A & T568B wiring.
- b. Operating temperature : -10°C to 60°C . (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- c. Durability :
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
- d. The Cat.5e transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

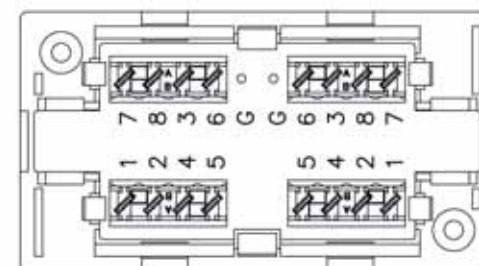

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		25.JUN.2010		QIQI						
	CHECK		25.JUN.2010		JANE						
	APPROVAL		25.JUN.2010		JAIMY						
			DATE		NAME		SD5021				
	SCALE	1/1 (A4)		UNIT	mm		DES.: CAT.5E UNSHIELDED BOX				
			DRAWING NO.								
			DRAWING CLASSIFICATION								

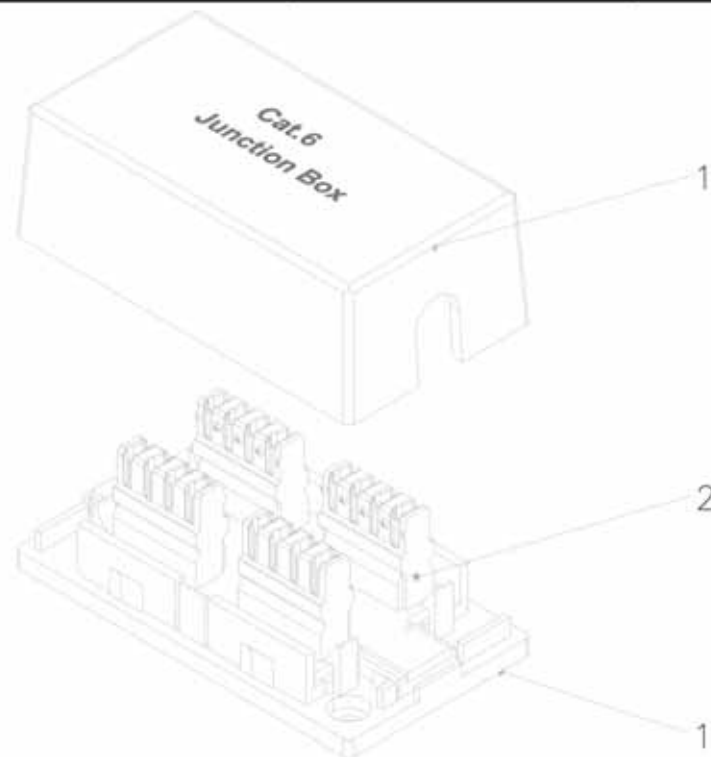

SCALE 1/1


Specification :

Material :

1. Box : ABS, UL 94V-0, with white color.
2. IDC :
 - 2-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 2-2. Phosphor Bronze with Tin plated.
3. PCB : FR4, UL 94V-0.

Performance :

- a. T568A & T568B wiring.
- b. Operating temperature : -10°C to 60°C . (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- c. Durability :
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
- d. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

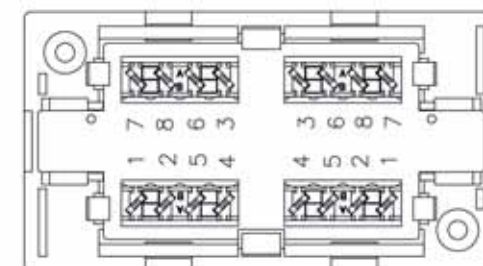

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		25.JUN.2010	QIQI	
	CHECK		25.JUN.2010	JANE	
	APPROVAL		25.JUN.2010	JAIMY	
			DATE	NAME	SD6021
	SCALE	1/1 (A4)	UNIT	mm	DES.: CAT.6 UNSHIELDED BOX
		DRAWING NO.			
		DRAWING CLASSIFICATION			
		S	SHEET	1 OF 1	