


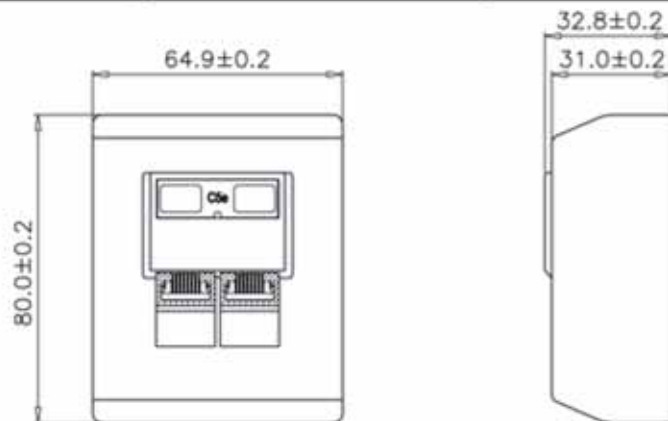


Specification :

Material :

1. Box Housing : ABS, UL 94-HB, with optional color.
2. RJ45 Jack :
 - 2-1. Housing : PBT+Glass Fiber, UL 94V-0.
 - 2-2. Contact Bracket : PBT+Glass Fiber, UL 94V-0.
3. RJ45 Jack Shield : Bronze with Nickel plated.
4. RJ45 Jack Contact :
 - 4-1. Material : Phosphor Bronze with Nickel plated.
 - 4-2. Terminal : 50 micro-inch Gold plated over Nickel plated.
5. IDC :
 - 5-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 5-2. Terminal : Phosphor Bronze with Tin plated.
6. Cable Clamp : Bronze with Nickel plated.
7. Case : Zinc Die-casting.
8. PCB Bracket Set : ABS, UL 94-HB.
9. Identification :
 - 9-1. I.D. Plate : PVC, Transparent color.
 - 9-2. Paper.
 - 9-3. Frame : ABS, UL 94V-0.
10. PCB : FR4, UL 94V-0.


Performance :

- a. T568A & T568B wiring.
- b. Insertion force : 30N max. (IEC 60603-7-5)
- c. Retention strength : 7.7 kg between Jack and Plug.
- d. Operating temperature : -10°C to 60°C . (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- e. Life(mating cycles) :
 - * Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-5)
 - * IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with Krone punch down tool.
- f. The Cat.5e transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

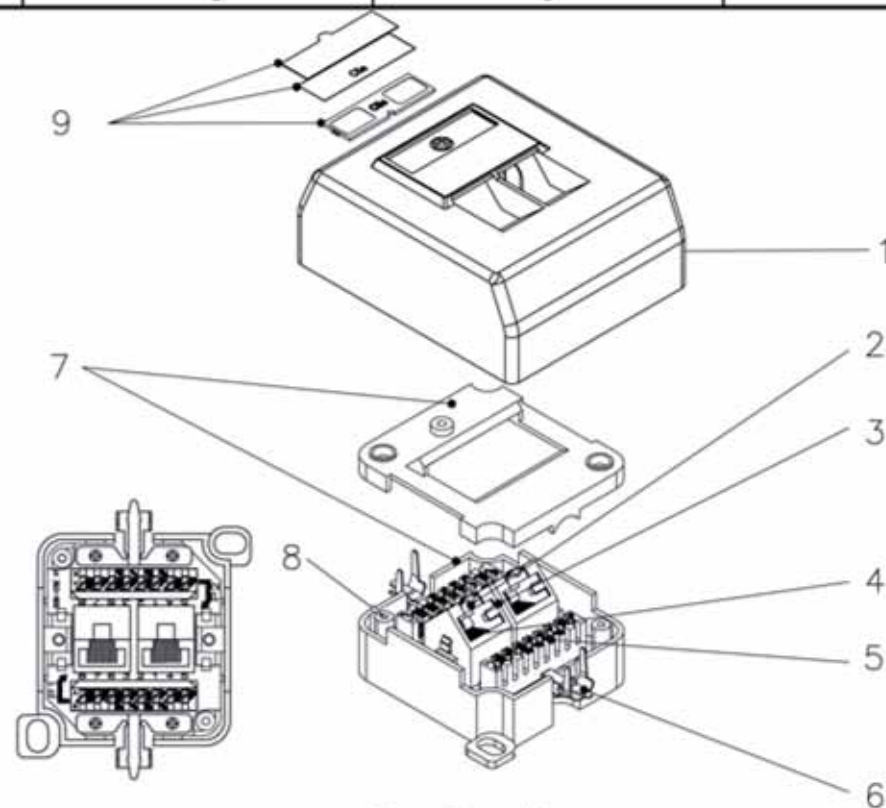

SCALE 1/2

GENERAL TOLERANCE OF DIMENSIONS X.XXX ± 0.005 X.XX ± 0.05 X.X ± 0.1	DRAWING	16.SEP.2010	QIQI	AC
	CHECK	16.SEP.2010	JANE	
	APPROVAL	16.SEP.2010	JAIMY	
	DATE	NAME	FA5007	
SCALE	1/2 (A4)	UNIT	mm	DES.: CAT.5E FULL SHIELDED BOX
DRAWING NO.		DRAWING CLASSIFICATION		
S		SHEET		1 OF 1
A4				

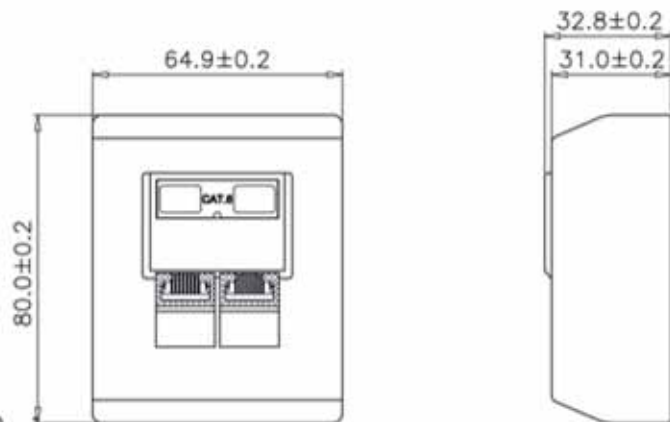


Specification :

Material :

1. Box Housing : ABS, UL 94-HB, with optional color.
2. RJ45 Jack :
 - 2-1. Housing : PBT+Glass Fiber, UL 94V-0.
 - 2-2. Contact Bracket : PBT+Glass Fiber, UL 94V-0.
3. RJ45 Jack Shield : Bronze with Nickel plated.
4. RJ45 Jack Contact :
 - 4-1. Material : Phosphor Bronze with Nickel plated.
 - 4-2. Terminal : 50 micro-inch Gold plated over Nickel plated.
5. IDC :
 - 5-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 5-2. Terminal : Phosphor Bronze with Tin plated.
6. Cable Clamp : Bronze with Nickel plated.
7. Case : Zinc Die-casting.
8. PCB Bracket Set : ABS, UL 94-HB.
9. Identification :
 - 9-1. I.D. Plate : PVC, Transparent color.
 - 9-2. Paper.
 - 9-3. Frame : ABS, UL 94V-0.
10. PCB : FR4, UL 94V-0.

Performance :

- a. T568A & T568B wiring.
- b. Insertion force : 30N max. (IEC 60603-7-5)
- c. Retention strength : 7.7 kg between Jack and Plug.
- d. Operating temperature : -10°C to 60°C . (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- e. Life(mating cycles) :
 - * Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-5)
 - * IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with Krone punch down tool.
- f. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

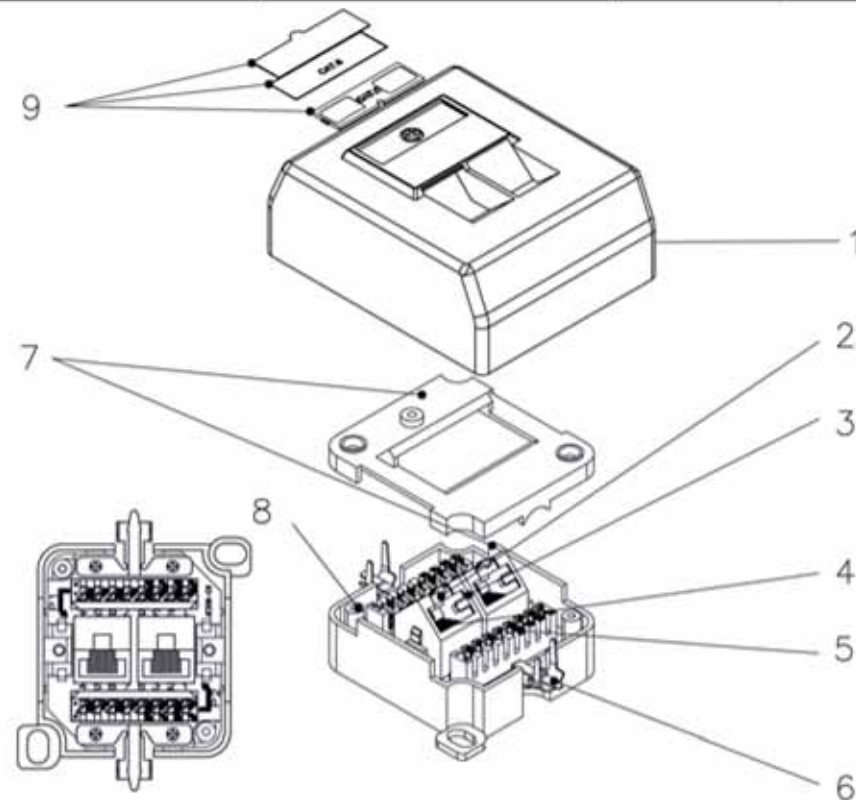

SCALE 1/2

GENERAL TOLERANCE OF DIMENSIONS X.XXX ± 0.005 X.XX ± 0.05 X.X ± 0.1	DRAWING	16.SEP.2010	QIQI	
	CHECK	16.SEP.2010	JANE	
	APPROVAL	16.SEP.2010	JAIMY	
	DATE		NAME	FA6007
	SCALE	1/2 (A4)	UNIT	mm
DRAWING NO.		DES.: CAT.6 FULL SHIELDED BOX		
DRAWING CLASSIFICATION		S	SHEET	1 OF 1
		A4		