




www.equip-info.net

Cat.5e F/UTP Patch Cord

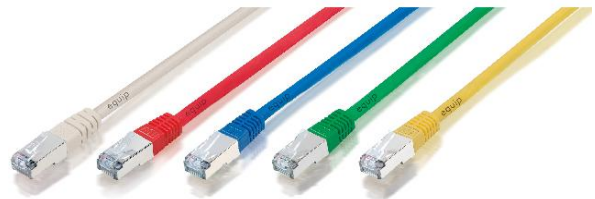


The equip® Cat.5e F/UTP Patch Cord is composed of high-quality materials and thoroughly-examined to meet EIA/TIA 568-C.2 channel standard, delivering ultrahigh and error-free signal in the most demanding network environments.

| Key Feature

- Stranded 26AWG Patch Cord with 100MHz Performance.
- Foil Shielded, improved shield reliability
- High performance and easy installation
- Gold Plating Pin Provides the Highest Interconnect Reliability
- Cable Length Printing on Plug


| Structure

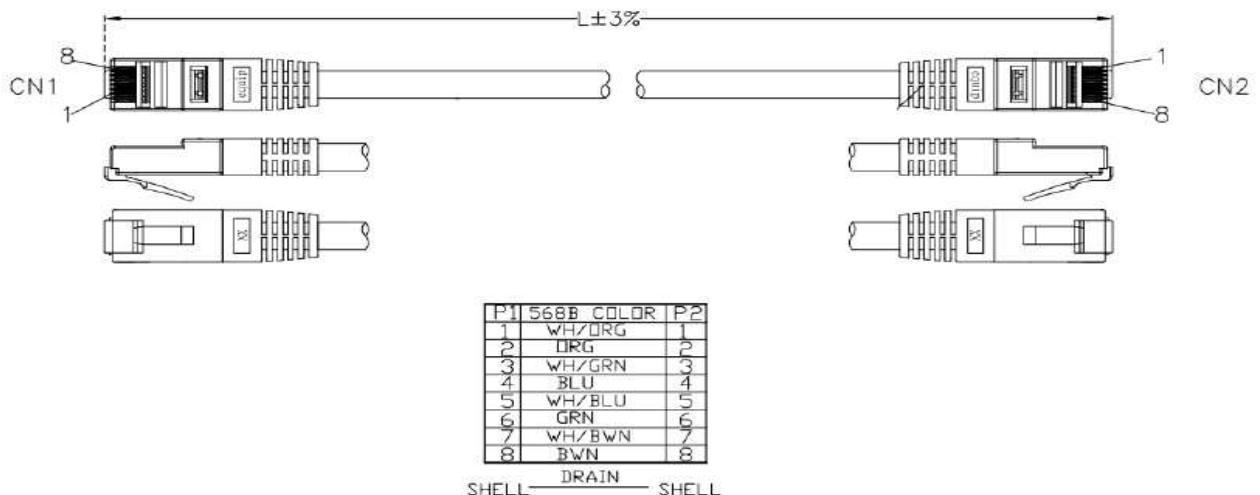

I Specification

Conductor	Material	Bare Copper
	Construction	26AWG, 7/0.16 ± 0.015mm
Insulation	Thickness	MIN at any point: 0.15mm / MAX AVG:0.21mm
	Diameter	0.87± 0.03mm
	Colors	Blue/White-Blue, Orange/White-Orange, Green/White-Green, Brown/White-Brown
Jacket	Material	PVC
	Thickness	MIN at any point: 0.40mm MAX AVG: 0.55mm
	Diameter	5.3 ± 0.3mm
	Marking	equip CAT.5E SF/UTP PATCH CABLE E213738 CM (UL) C(UL) 4PR 26AWG ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2
Connector	RJ45 Plug	8P8C

I Ordering Information

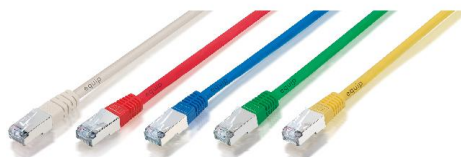

	Beige	Red	Blue	Green	Yellow
0.25m	205413	205523	205533	205543	205463
0.5m	205417	205427	205437	205447	205467
1.0m	205410	205420	205430	205440	205460
2.0m	205411	205421	205431	205441	205461
3.0m	205412	205422	205432	205442	205462
5.0m	205414	205424	205434	205444	205464
7.5m	205415	205425	205435	205445	205465
10m	205416	205426	205436	205446	205466
15m	205418	205428	205438	205448	205468
20m	205419	205429	205439	205449	205469

Packing: equip Zip-bag