



DATE	REV	DESCRIPTION	BY	CHKD
07/22	A/0	NEW	CAOWEN	YZG

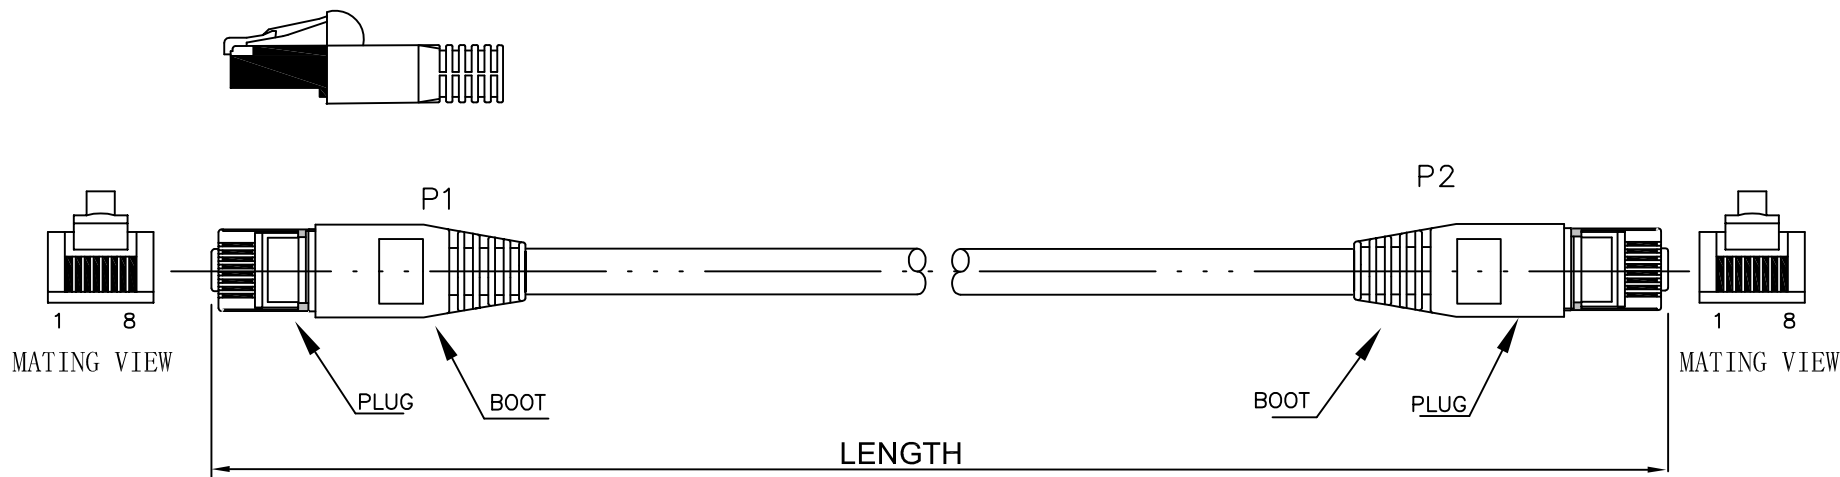

Marking: ACT CATEGORY 5E SFTP PATCH CABLE 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-2-2 & IEC 60332-1-2 ▲ 26AWGX4P (UL) c(UL)CMH E164469-XX

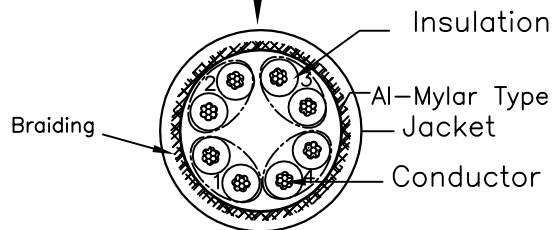

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PIN OUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.88±0.06mm
Jacket	PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.6±0.2mm


WIRE	CAT. 5E SFTP STR 26AWG*4P
PLUG	WITH BOOT 8P8C 50U"
Length	XXM
COLOR	WH903

RoHS COMPLIANT

Unless specified on the drawing, tolerances are per the follows:

. ± 1
.X ± 0.2
.XX ± 0.05

3RD



AE

DRAW. NO	00752	ITEM	IB70XX		
DEPARTMENT	LAN DEP	DRAW	CAOWEN	DATE	10/07/22
SCALE		CHECKER	YZG	DATE	
UNIT	mm	APPROVAL		DATE	