



RPSMA plug-RPSMA jack-3m



ANC-1430

H/W Version: 1

LevelOne provides a high-performance DDC 200 cable with excellent flexibility. All cables designed for low loss general-purpose indoor/outdoor applications, such as extending network connection and many more.

Weatherability

DDC 200 cables are designed for outdoor exposure incorporate the best materials for UV resistance and have life expectancy in more than 10 years.



1. RPSMA Jack
2. RPSMA plug

Related Products



ANC-1440
RPSMA plug-RPSMA jack-5m




ANC-1470
RPSAM plug-RPSAM jack-10m

Technical Specifications

Electrical Properties:	
Frequency Range	
DC~6GHz	
Impedance	
50Ω	
Insertion Loss	
2.4 Ghz	1.1 dB
3.0 Ghz	1.0 dB
5.8 Ghz	1.2 dB
6.0 Ghz	1.0 dB
VSWR	
1.3:1 Max	
Cable	
Low Loss 200 Coaxial cable	
Connector	
RP SMA MALE	
Connector	
RP SMA FEMALE	
Physical Properties	
Operating Temp	
-10°C~+60°C	

Storage Temp
-10°C~+70°C
Conductor Material
Bare Copper Wire
Conductor Cond. Size
1.12±0.03mm
Insulation MIN. AVG.THICK
0.84mm
Insulation Material
Gas Injected Foamed Polyethylene
Shield Copper Material
Tinned Copper Wire
Shield Copper Size
0.12±0.008mm
Jacket Material
PVC
Jacket Colour
Black
Jacket O.D
4.95±0.10

Dimension Diagram

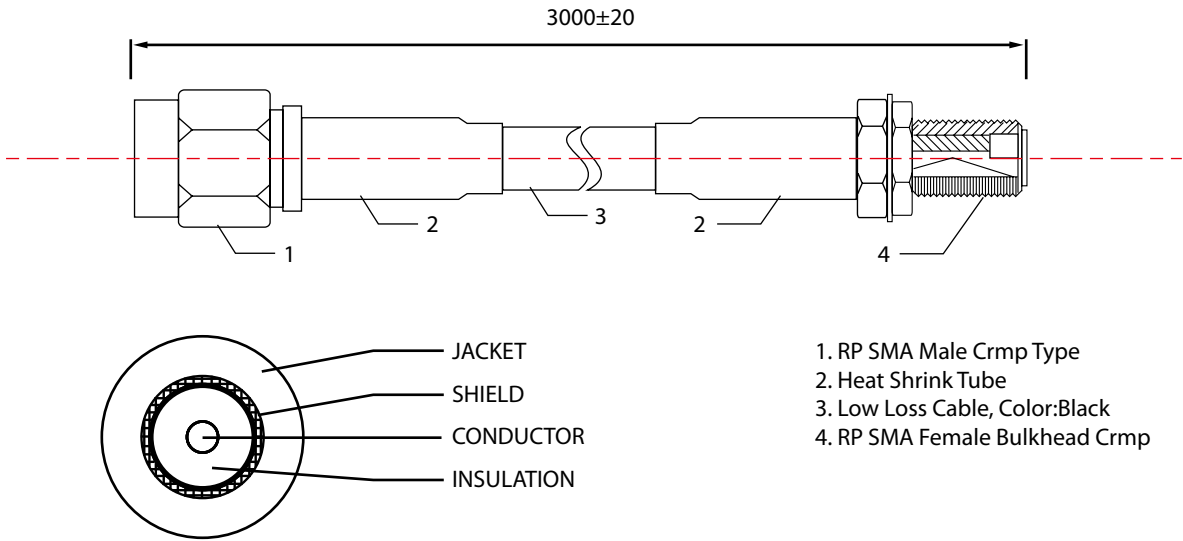

Order Information

ANC-1430: RPSMA plug-RPSMA jack-3m

Package Contents

ANC-1430