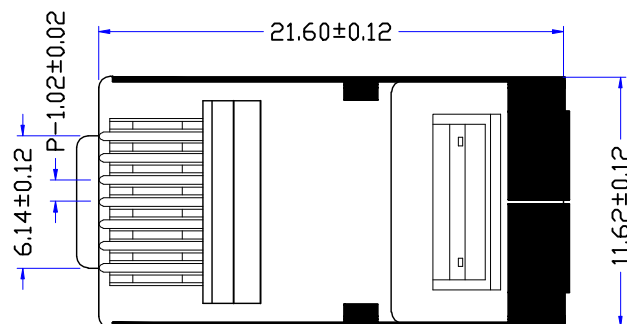
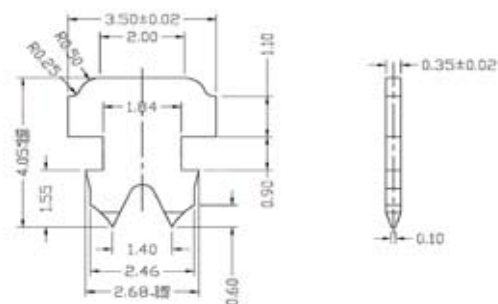
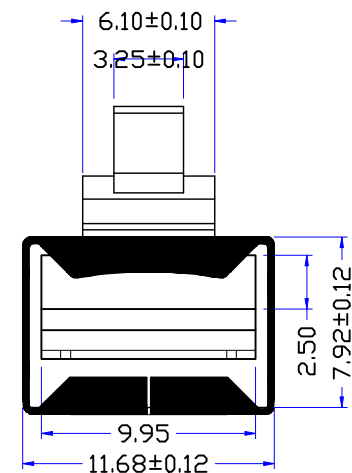
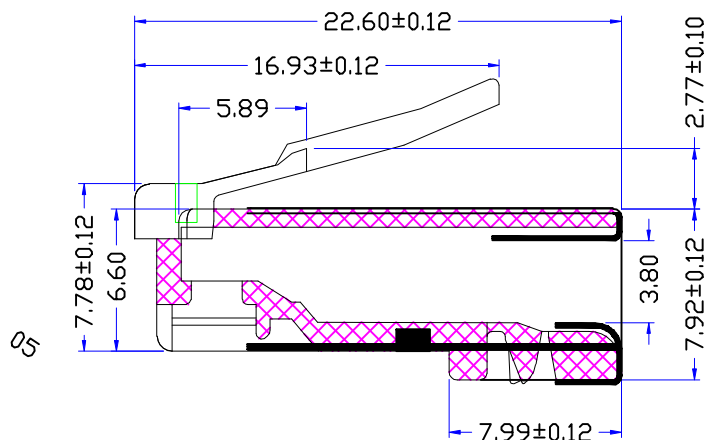
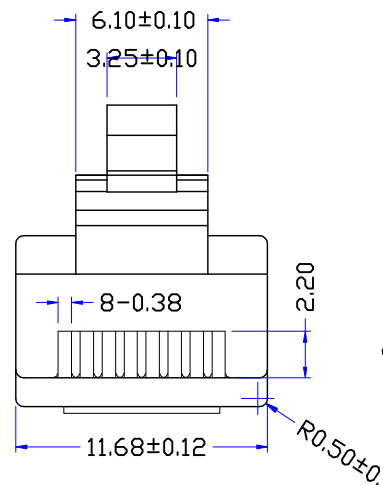


FEATURES:

1 Electrical Test:

A. 250V AC max at 2 amps.

B. Dielectric with standing 500volts AC.

C. Insulation Resistance: 500 megaohms.

D. Termination Resistance: 35megaohms.

2 Mechanical:

A. Cable-to-Plug tensile strength-20LBs (89N) min.

B. Durability: 500 mating cycles.

C. gold plating(01, 03, 06, 15, 30, 50)U"

REV.	A/0	DATE	UNITS	MM		TITLE	8P8C(F)
DRAWN		2013. 09. 01	SCALE	FULL		PART NO.	121178-v2
APPROVED		MATERIAL	TOL.	0.00	±0.12	VIEW	
FIREATING	94V2	PC	equip				