


Philips
HDMI Cable

1.5 m

SWV5570

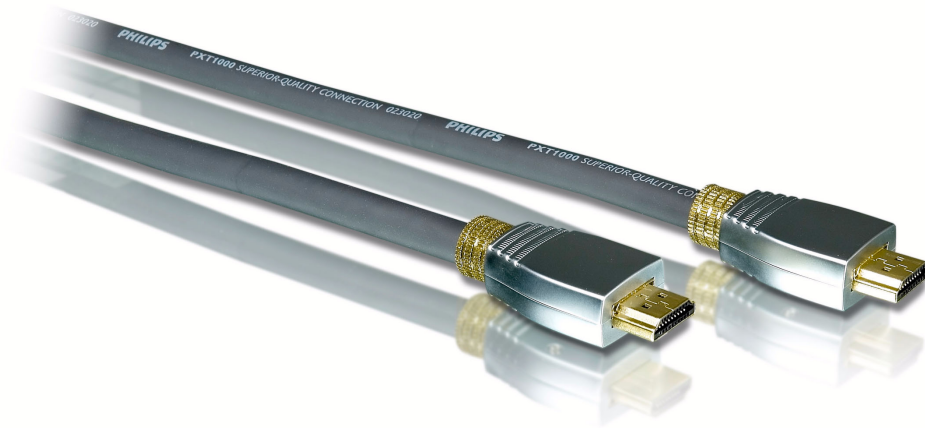

Create a superior viewing experience

with this audio and video cable

Experience a new level of viewing while transferring audio and video signals between your components. Superior construction delivers improved picture performance.

Enjoy better picture quality

- Stranded conductor extends durability
- High-bandwidth Digital Content Protection

Enjoy better audio quality

- 24 carat gold-plated connectors optimise signal

Protects against signal loss

- 100% aluminum shielding
- Oxygen-free copper conductor for ideal signal transfer
- Copper braided reinforced aluminum shielding

Easy installation

- Plug and play for easy use

Enjoy extended durability

- Super pliable jackets for outstanding flexibility

PHILIPS
sense and simplicity

HDMI Cable
1.5 m

Specifications

Packaging Data

- Quantity: 1
- EAN/UPC/GTIN: 87 10895 93455 8
- Gross weight: .74 kg
- Tare weight: .13 kg
- Net weight: .61 kg
- Length: 265 mm
- Width: 195 mm
- Height: 100 mm

Inner Carton

- EAN/UPC/GTIN: 87 10895 97054 9
- Quantity: 2
- Gross weight: 1.82 kg
- Tare weight: .6 kg

- Net weight: 1.22 kg
- Length: 280 mm
- Width: 175 mm
- Height: 210 mm

Outer Carton

- EAN/UPC/GTIN: 87 10895 97055 6
- Quantity: 4
- Gross weight: 4.31 kg
- Tare weight: 1.87 kg
- Net weight: 2.44 kg
- Length: 370 mm
- Width: 300 mm
- Height: 230 mm

SWV5570/10

Product highlights

Stranded conductor

The stranded wire evenly distributes stress so no single area is overburdened. It provides more flexibility for easier positioning.

HDCP Compliant

High-bandwidth Digital Content Protection (HDCP) allows you to play protected content media such as movies and concerts. It checks the signal to prevent piracy, allowing only legal copies of content to display.

24Carat Gold Plated Connectors

24 carat gold-plated connectors ensure the best signal quality for your components.

100% aluminum shielding

This protective layer of aluminum guards against electromagnetic interference for improved signal quality.

Twisted high purity OFC

This oxygen-free copper conductor provides the highest accuracy in signal transfer with minimal resistance.

Braided Shielding

Copper braided reinforced aluminum shielding protects against signal loss and interference.

Plug and play

Plug and play offers easy installation of components without time-consuming installations.

Super pliable jackets

Super pliable PVC jackets are abrasion-resistant for outstanding flexibility and protection against everyday wear and tear.



Issue date 2007-08-04

Version: 3.0

12 NC: 9082 100 06367
EAN: 87 10895 93463 3

© 2007 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com