
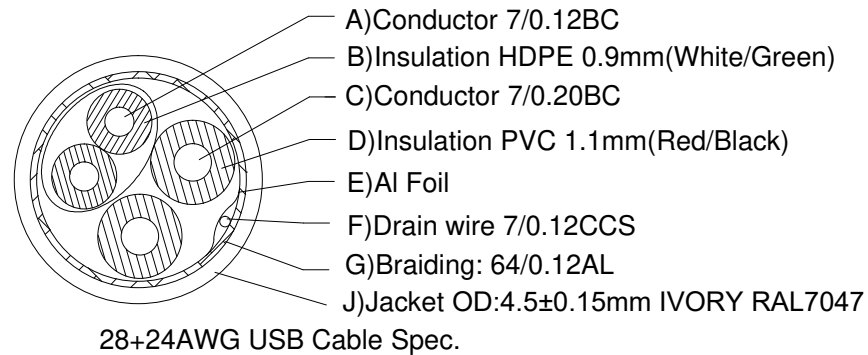
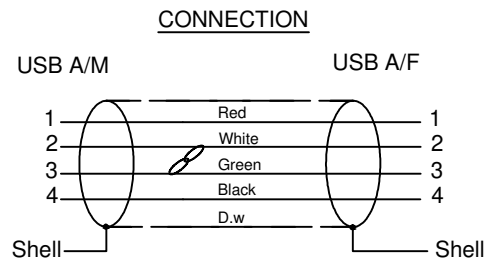


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/08/09	

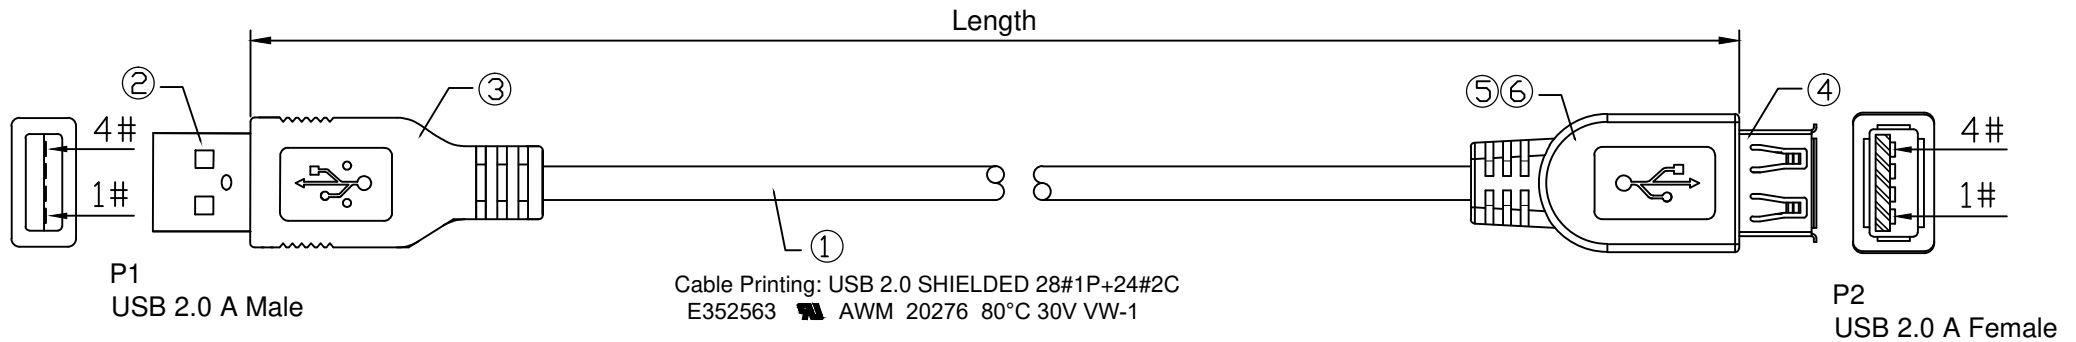

Remark:

- 1.100% Open/Short Test
- 2.Conductive Resistance:2ohms MAX
- 3.Insulation Resistance:5M ohm MIN.
- 4.The product is Reach/RoHS compliant.

Item NO.	Length(m)
SB2198	0.5m
SB2199	1.0m
SB2200	1.8m
SB2203	3.0m
SB2205	5.0m

⑥	External Mold	Outer Mould 45P PVC, IVORY RAL7047	1PC	
⑤	Innernal Mold	Inner Mould PE	1PC	
④	Connector	USB A Female, Nickle-Plated	1PC	
③	External Mold	Outer Mould 45P PVC, IVORY RAL7047	1PC	
②	Connector	USB A Male, Nickle-Plated	1PC	
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC IVORY RAL7047		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED	
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
28+24 USB A Male TO A Female		DATE	2018/08/09
APPROVAL		CHECKED	
		DRAWN	