




8	Overmold	Polyvinyl Chloride 45P White	18
7	Innermold	Low density transparent PE adhesive	10
6	AL Shell	VGA Shell:52*23.5*10.9mm	1
5	AL Shell	Type-C Shell:22*10.9*5.9mm	1
4	Baffle	VGA Cover:ABS White 22.2*9.7*13.6mm	1
3	PCBA	VGA PCBA:36.5*26.5*1.6mm 4L,CONN VGA,Au-Plated,Insulation PBT White.	1
2	Conn	USB 3.1 C Type,Insulation PBT White,Contact Pin G/F,Shell Ni-Plated,With Capacitance	1
1	Cable	USB3.1 Cable(32AWG*1P+AL)*5+30AWG*3C+30AWG*1C+24AWG*1C+D+AL PVC Jacket Black OD:4.6±0.1mm NO Mark	0.18
NO	Name	Description	Quantity

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MM
TOLERANCE
DECIMALS ANGULAR
.XX ±0.1 ±5°
.XXX ±0.05 ±5°
DO NOT SCALE DRAWING

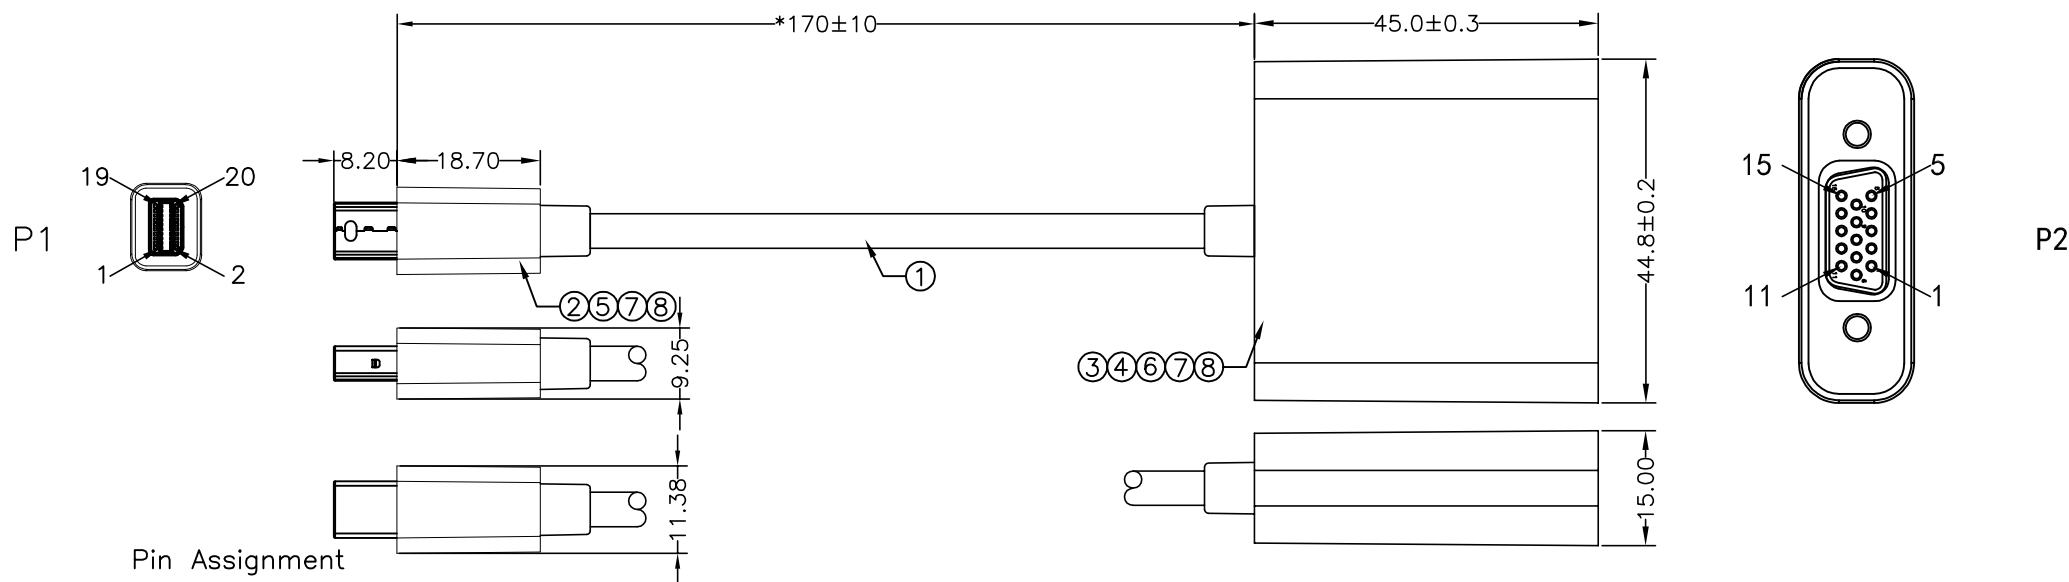

Product name

Mini DP/M to VGA/F L=170mm

133432

DA235

MM

E1705010

X0

1/1