
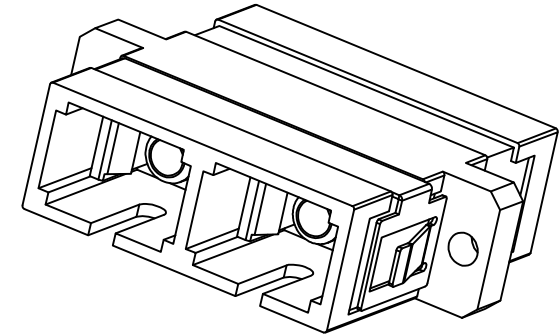


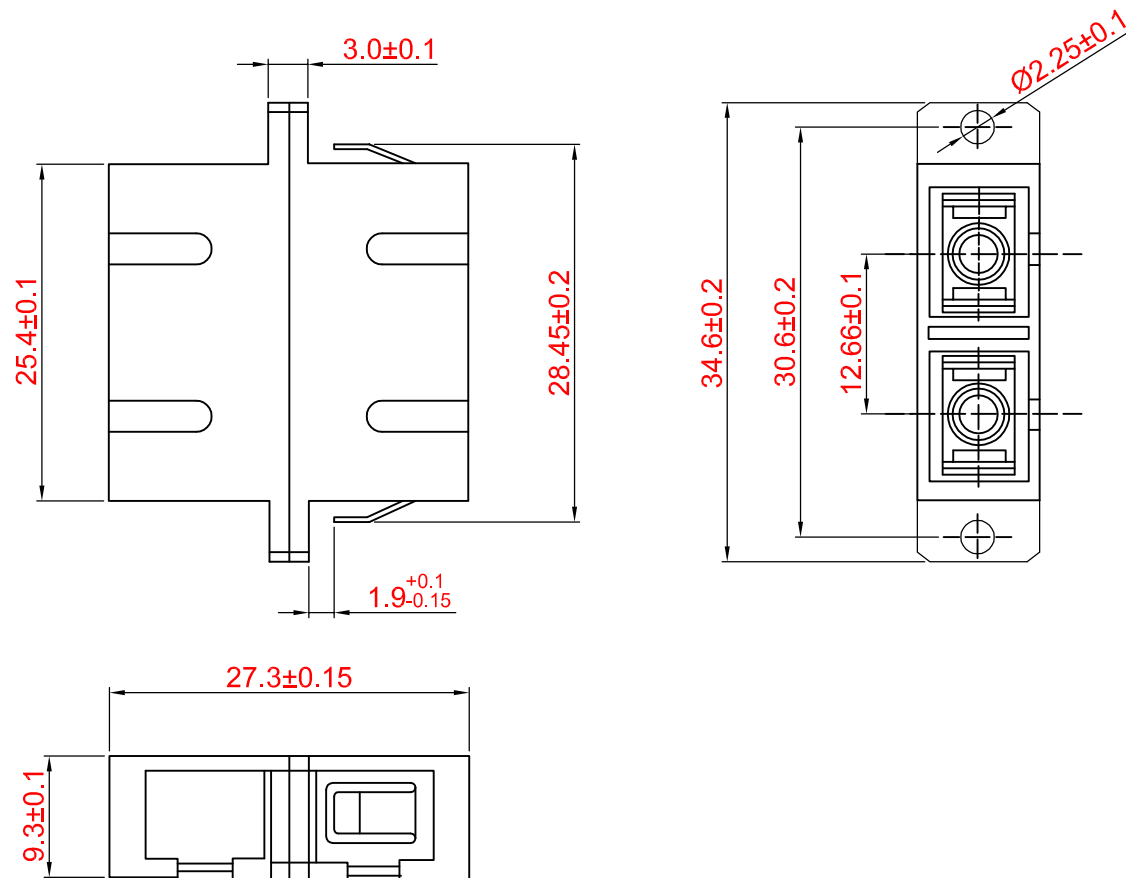

NOTE:

- 1.Insertion loss Max :0.2dB
- 2.Insertion loss Typical values:0.1dB
- 3.SC sleeve material:ZrO<sub>2</sub>
- 4.Operation temperature:-40°C to +85°C
- 5.SC connector according to IEC 61754-4
- 6.Durability:1000 matings
- 7.Tensile strength:200~600G

ROHS  
Compliant

| Part Number | Interface type  | Optical fiber type | Color        | Material |
|-------------|-----------------|--------------------|--------------|----------|
| EA1006      | SC-SC           | OM1/2              | Beige        | Plastic  |
| EA3003      | SC-SC           | OM3                | Aqua         | Plastic  |
| EA3004      | SC- SC          | OM4                | Erica Violet | Plastic  |
| EA1027      | SC-SC           | OM5                | Lime green   | Plastic  |
| EA3002      | SC-SC           | SM                 | Blue         | Plastic  |
| EA1028      | SC/APC8-SC/APC8 | SM                 | Green        | Plastic  |

|               |                          |          |             |
|---------------|--------------------------|----------|-------------|
| Designed by:  | Yong Yu                  | Audit:   | Qihua Cheng |
| Date:         | 2017-10-11               | Approve: | Yong Huang  |
| Unit:         | mm                       | Sheet:   | A4          |
| Product Name: | SC duplex flange adaptor |          |             |
| Drawing NO:   | SOP-ED-171011-04-V2      |          |             |