


CS1262

2-Port PS/2 DVI KVM Switch



Diagram

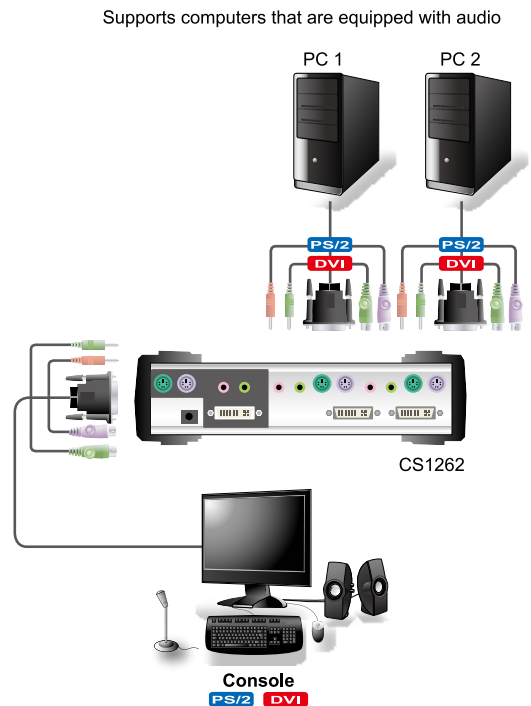

Features

- One PS/2 console controls 2 DVI computers
- Fully compliant with DVI-Digital and DVI-Analog specifications
- With speaker and microphone support
- Independent switching of KVM and audio focus
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality – 1920 x 1200; DDC2B
- Supports Microsoft IntelliMouse (Pro), Explorer, and Optical PS/2 mice
- Keyboard and mouse emulation for error-free booting
- Display Emulation Technology - stores the console monitor's EDID (Extended Display Identification Data) to optimize display resolution
- HDCP Compliant
- Auto Scan function to monitor computer operation

Specifications

Function		CS1262
Computer Connections		2
Port Selection		Hotkey, Pushbutton
Connectors	Console Ports	Keyboard 1 x 6-pin Mini-DIN Female (Purple)
		Video 1 x DVI Female (White)
		Mouse 1 x 6-pin Mini-DIN Female (Green)
		Speaker 1 x Mini Stereo Jack Female (Green)
		Microphone 1 x Mini Stereo Jack Female (Pink)
	KVM Ports	Keyboard 2 x 6-pin Mini-DIN Female (Purple)
		Video 2 x DVI Female (White)
		Mouse 2 x 6-pin Mini-DIN Female (Green)
		Speaker 2 x Mini Stereo Jack Female (Green)
		Microphone 2 x Mini Stereo Jack Female (Pink)
	Power	1 x DC Jack
Switches	Port	2 x Pushbutton
	On Line	2 (Orange)
LEDs	Selected	2 (Green)
	Keyboard/ Mouse	PS/2
Video		1920 x 1200; DDC2B
Scan Interval		1-99 Seconds
Power Consumption		DC5.3V, 1.78W
Environment	Operating Temp.	0-50°C
	Storage Temp.	-20-60°C
	Humidity	0-80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	0.70 kg
	Dimensions (L x W x H)	21.00 x 8.50 x 5.50 cm

* The specifications and pictures are subject to change without notice.