




Siemens LC96WA530 Chimney hood	EAN code: 4242003530900
Predecessor:	sales programme: I21
Successor:	


LC96WA530 stainless steel		Included accessories	Technical Data
Chimney hood Pyramidal design 90 cm wide			Characteristics Color chimney : Stainless steel Typology : Chimney Approval certificates : CE, VDE Length electrical supply cord (cm) : 130.0 Height of the chimney (mm) : 582-864/582-974 Height of product, without chimney (mm) : 90 Dimensions of the product, with chimney (if exists) (mm) : 672-1064 x 900 x 500 Net weight (kg) : 19.00 Type of control : mechanical Number of speed settings : 3-stage + intensive Maximum output air extraction (m3/h) : 450 Boost position output recirculating (m3/h) : 440 Maximum output recirculating air (m3/h) : 330 Boost position air extraction (m3/h) : 680 Number of lights : 2 Diameter of air outlet (mm) : 150 / 120 Grease filter material : Metal grease filter
Variant: Design: Operating and power: Environment and safety: Comfort: Measures: • 90 cm Chimney hood • Appliance colour: stainless steel • Suitable for ducted or re-circulated extraction • For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed • Wall mounted hood • wall fixing system • Innerframe • Push buttons, backlighted for extractor speeds and light • 3 speeds plus intensive setting • light conception white/blue • Twin channel high performance fan motor • 2 x 25 W halogen lights • Metal grease filter, dishwasher safe • Extraction rate according to EN 61591 ø 15 cm: max. Normal use 450 m³/h Intensive 680 m³/h • Additional noise insulation • Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air: Max. normal use: 54 dB(A) re 1 pW (40 dB(A) re 20 µPa sound pressure) Intensive: 64 dB(A) re 1 pW (50 dB(A) re 20 µPa sound pressure) • Dimensions exhaust air (HxWxD): 672-954 x 900 x 500 mm • Dimensions recirculating (HxWxD): 672-1064 x 900 x 500 mm • Diameter pipe Ø 150 mm (Ø 120 mm enclosed) • Power rating: 260 W • Special chimney solutions possible		Optional accessories	Consumption and connection features Connection Rating (W) : 260 Current (A) : 10 Voltage (V) : 220-240 Frequency (Hz) : 50 Plug type : Gardy plug w/ earthing Installation typology : Wall-mounted
		Alternative colors available	

LC96WA530 stainless steel
Chimney hood
Pyramidal design
90 cm wide

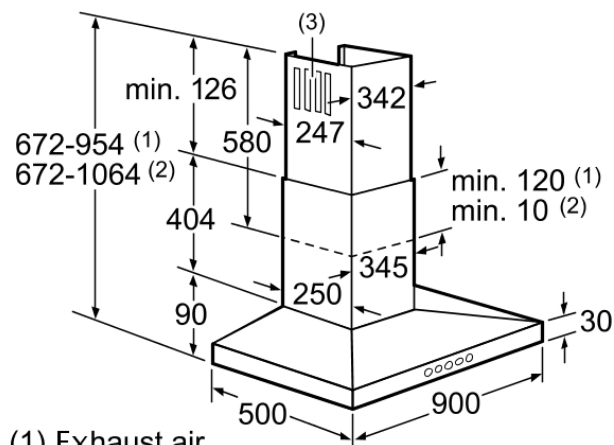


- (1) Exhaust air
- (2) Circulated
- (3) Air outlet - For exhaust air, fit with the slots facing downwards

measurements in mm

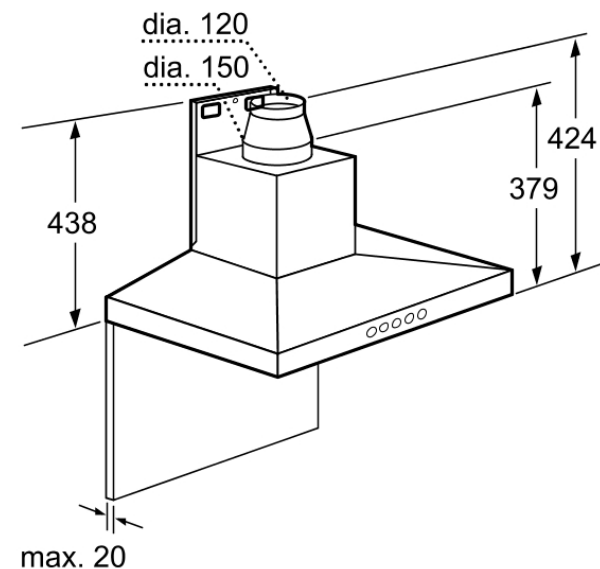


Measurements in mm

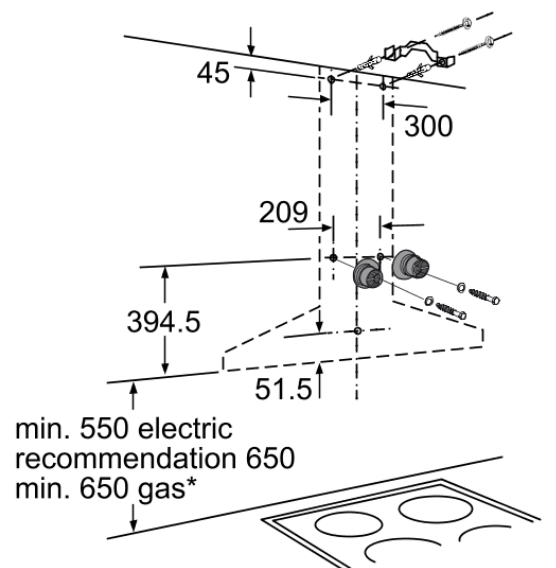

* from upper edge
of pan support

Measurements in mm

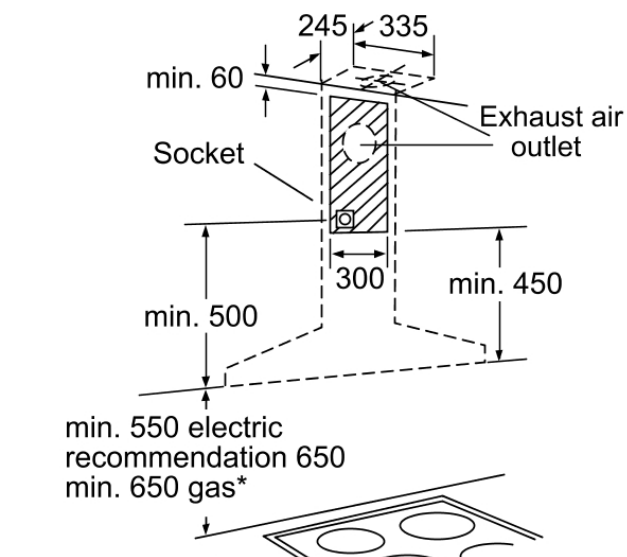

* from upper edge
of pan support

Measurements in mm