


### Media Converters & Chassis

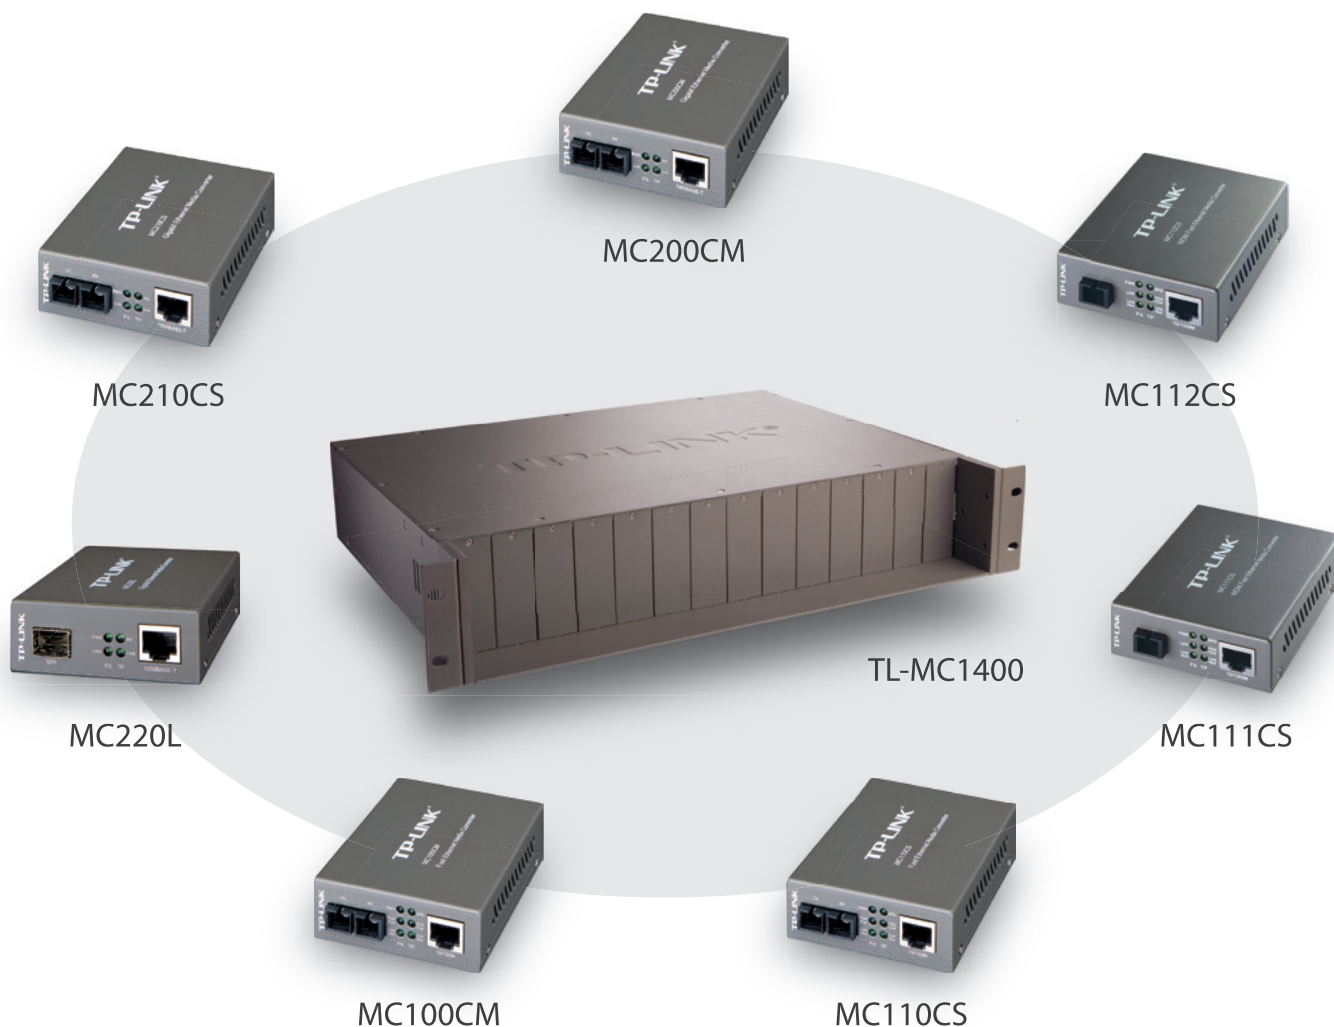

#### Overview

The Chassis-based Media Converters include a number of independent media converters and a chassis capable of housing up to 14 media converters. You can start with single media converters, each equipped with its own housing and AC power adapter. When you require more room, you can mount a chassis in your equipment rack and install your media converters in the chassis - the media converters can be slid into the chassis.

## TL-MC1400 14-Slot Rackmount Chassis

The TL-MC1400 14-Slot Rackmount Chassis is specially designed for accommodating chassis-based Media Converters. It is a standard 19-inch 2U height rackmount chassis which can be suitably mounted in the standard 19-inch rack.

The chassis lets you install multiple media converters in an equipment rack together with the network devices for which they provide media conversion. This provides for space saving, and the cabling will look neat. The chassis comes with its own universal AC to DC power supply. For maximum power availability, an optional redundant power supply is available for installation in the chassis.

### Features:

- 14 bays to house up to 14 media converters\*
- Standard 19-inch rack-mountable, 2U height
- Non-stop operation & minimal downtime
- Allows hot-swapping of media converters
- Hot swappable redundant power supplies
- Cooling fans on back side (together with power supplies)
- Second AC to DC power supply for load-sharing purposes (Optional)
- Media converter power isolation for electrical isolation from each bay
- Offers over-voltage and over-current protections

### Specifications:

|                               |                                                                                                     |
|-------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Power Supply</b>           | Input: 100-240V~50/60Hz 3.0A(Max)<br>Output: +9.5VDC, 9.5A(Max.)<br>Vripple: ≤50mv<br>Noise: ≤100mv |
| <b>Operating Temperature</b>  | 0°C~40°C (32°F~104°F)                                                                               |
| <b>Storage Temperature</b>    | -40°C~70°C (-40°F~158°F)                                                                            |
| <b>Operating Humidity</b>     | 10%~90% non-condensing                                                                              |
| <b>Storage Humidity</b>       | 5%~90% non-condensing                                                                               |
| <b>Dimensions (W X D X H)</b> | 19.0 x 14.1 x 3.4 in. (482 x 358 x 86 mm)<br>Standard 19-Inch, 2U height                            |
| <b>Weight</b>                 | 8Kg                                                                                                 |

\*The TL-MC1400 supports MCXXX ver: 2.0 and 3.0, not ver: 1.0.

## MC200CM

The MC200CM media converter converts 1000BASE-SX fiber to 1000Base-T copper media or vice versa. It is designed for use with 850nm multi-mode fiber cable utilizing the SC-Type connector, transmitting data up to 0.55 kilometers away. What's more, MC200CM can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis.

### Features:

- Works at 1000Mbps in Full-Duplex mode for both TX port and FX port
- Supports Auto MDI/MDIX for TX port
- Provides switch configuration of Force /Auto transfer mode for FX port
- Extends fiber distance up to 0.55km
- Easy-to-view LED indicators provide status to monitor network activity easily

### Specifications:

|                               |                                                                                                                                                                                        |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>              | IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x                                                                                                                                                 |
| <b>Basic Function</b>         | Full Duplex Flow Control (IEEE 802.3x)<br>Extends fiber distance up to 0.55km using 50/125um fiber, 0.22km using 62.5/125um fiber                                                      |
| <b>Wave Length</b>            | 850nm                                                                                                                                                                                  |
| <b>Interface</b>              | 1 1000Mbps SC port<br>1 1000Mbps RJ45 port (Auto MDI/MDIX)                                                                                                                             |
| <b>Network Media</b>          | 1000BASE-T: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>1000BASE-FX: Multi-mode Fiber                                                            |
| <b>LED Indicators</b>         | PWR, LINK, RX                                                                                                                                                                          |
| <b>Certifications</b>         | FCC, CE                                                                                                                                                                                |
| <b>Dimensions (W x D x H)</b> | 3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)                                                                                                                                            |
| <b>Environment</b>            | Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)<br>Operating Humidity: 10%~90% non-condensing<br>Storage Humidity: 5%~90% non-condensing |
| <b>Power Supply</b>           | External Power Adapter, 9V/0.6A or 5V/1A                                                                                                                                               |

## MC210CS

The MC210CS media converter converts 1000BASE-LX/LH fiber to 1000Base-T copper media or vice versa. It is designed for use with 1310nm single-mode fiber cable utilizing the SC-Type connector, transmitting data up to 15 kilometers. What's more, MC210CS can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis.

### Features:

- Works at 1000Mbps in Full-Duplex mode for both TX port and FX port
- Supports Auto MDI/MDIX for TX port
- Provides switch configuration of Force /Auto transfer mode for FX port
- Extends fiber distance up to 15km
- Easy-to-view LED indicators provide status to monitor network activity easily

### Specifications:

|                               |                                                                                                                                                                                        |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>              | IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x                                                                                                                                                 |
| <b>Basic Function</b>         | Full Duplex Flow Control (IEEE 802.3x)<br>Extends fiber distance up to 15km                                                                                                            |
| <b>Wave Length</b>            | 1310nm                                                                                                                                                                                 |
| <b>Interface</b>              | 1 1000Mbps SC port<br>1 1000Mbps RJ45 port (Auto MDI/MDIX)                                                                                                                             |
| <b>Network Media</b>          | 1000BASE-T: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>1000BASE-FX: Multi-mode Fiber                                                            |
| <b>LED Indicators</b>         | PWR, LINK, RX                                                                                                                                                                          |
| <b>Certifications</b>         | FCC, CE                                                                                                                                                                                |
| <b>Dimensions (W x D x H)</b> | 3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)                                                                                                                                            |
| <b>Environment</b>            | Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)<br>Operating Humidity: 10%~90% non-condensing<br>Storage Humidity: 5%~90% non-condensing |
| <b>Power Supply</b>           | External Power Adapter, 9V/0.6A or 5V/1A                                                                                                                                               |

## MC220L

The MC220L converts 1000BASE-SX/LX/LH fiber to 1000Base-T copper media or vice versa. It is designed for use with 850nm multi-mode/1310nm single-mode/WDM fiber cable utilizing the LC-Type connector, transmitting data up to 0.55 kilometers or 10 kilometers. What's more, MC220L can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis.

### Features:

- Works at 1000Mbps in Full-Duplex mode for both TX port and FX port
- Supports Auto MDI/MDIX for TX port
- Provides switch configuration of Force /Auto transfer mode for FX port
- FX port support hot-swappable
- Extends fiber distance up to 0.55 km for multi-mode fiber and 10 km for single-mode fiber
- Easy-to-view LED indicators provide status to monitor network activity easily

### Specifications:

|                               |                                                                                                                                                                                        |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>              | IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x                                                                                                                                                 |
| <b>Basic Function</b>         | Full Duplex Flow Control (IEEE 802.3x)<br>Extends fiber distance up to 10km                                                                                                            |
| <b>Wave Length</b>            | Depend on the used SFP module                                                                                                                                                          |
| <b>Interface</b>              | 1 SFP port<br>1 1000Mbps RJ45 port (Auto MDI/MDIX)                                                                                                                                     |
| <b>Network Media</b>          | 1000BASE-T: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>1000BASE-FX: Multi-mode Fiber                                                            |
| <b>LED Indicators</b>         | PWR, LINK, RX                                                                                                                                                                          |
| <b>Certifications</b>         | FCC, CE                                                                                                                                                                                |
| <b>Dimensions (W x D x H)</b> | 3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)                                                                                                                                            |
| <b>Environment</b>            | Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)<br>Operating Humidity: 10%~90% non-condensing<br>Storage Humidity: 5%~90% non-condensing |
| <b>Power Supply</b>           | External Power Adapter, 9V/0.6A or 5V/1A                                                                                                                                               |

## MC100CM

The MC100CM media converter converts 100BASE-FX fiber to 100Base-TX copper media or vice versa. It is designed for use with 1310nm multi-mode fiber cable utilizing the SC-Type connector, transmitting data up to 2 kilometers. What's more, MC100CM can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis, and is equipped with Link Fault Pass Through which minimizes the loss caused by link failure.

### Features:

- Auto-negotiation of 10/100Mbps and Auto MDI/MDIX for TX port
- Provide switch configuration of Half-Duplex / Full-Duplex transfer mode for TX port
- Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
- Extend fiber distance up to 2km
- Easy-to-view LED indicators provide status to monitor network activity easily

### Specifications:

|                               |                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>              | IEEE 802.3u, IEEE 802.3x                                                                                                                                                                                                                                         |
| <b>Basic Function</b>         | Half/Full-Duplex transfer mode for TX port<br>Full Duplex Flow Control (IEEE 802.3x)<br>Half Duplex Flow Control (Backpressure)<br>Extends fiber distance up to 2km<br>Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely |
| <b>Interface</b>              | 1 100Mbps SC port<br>1 100Mbps RJ45 port (Auto MDI/MDIX)                                                                                                                                                                                                         |
| <b>Network Media</b>          | 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-T: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-FX: Multi-mode Fiber                                          |
| <b>LED Indicators</b>         | PWR, SPD, LFP, FDX/Col, Link/Act                                                                                                                                                                                                                                 |
| <b>Certifications</b>         | FCC, CE                                                                                                                                                                                                                                                          |
| <b>Dimensions (W x D x H)</b> | 3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)                                                                                                                                                                                                                      |
| <b>Environment</b>            | Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)<br>Operating Humidity: 10%~90% non-condensing<br>Storage Humidity: 5%~90% non-condensing                                                                           |
| <b>Power Supply</b>           | External Power Adapter, 9V/0.6A or 5V/1A                                                                                                                                                                                                                         |

## MC110CS

The MC110CS is a media converter designed to convert 100BASE-FX fiber to 100Base-TX copper media or vice versa. It's designed for use with single-mode fiber cable utilizing the SC-Type connector, transmitting data up to 20 kilometers. What's more, MC110CS can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis, and is equipped with Link Fault Pass Through which minimizes the loss caused by link failure.

### Features:

- Auto negotiation of 10/100Mbps and Auto MDI/MDIX for TX port
- Provide switch configuration of Half-Duplex / Full-Duplex transfer mode for TX port
- Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
- Extend fiber distance up to 20km
- Easy-to-view LED indicators provide status to monitor network activity easily

### Specifications:

|                               |                                                                                                                                                                                                                                                                   |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>              | IEEE 802.3u, IEEE 802.3x                                                                                                                                                                                                                                          |
| <b>Basic Function</b>         | Half/Full-Duplex transfer mode for TX port<br>Full Duplex Flow Control (IEEE 802.3x)<br>Half Duplex Flow Control (Backpressure)<br>Extends fiber distance up to 20km<br>Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely |
| <b>Interface</b>              | 1 100Mbps SC port<br>1 100Mbps RJ45 port (Auto MDI/MDIX)                                                                                                                                                                                                          |
| <b>Network Media</b>          | 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-T: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-FX: Single-mode Fiber                                          |
| <b>LED Indicators</b>         | PWR, SPD, LFP, FDX/Col, Link/Act                                                                                                                                                                                                                                  |
| <b>Certifications</b>         | FCC, CE                                                                                                                                                                                                                                                           |
| <b>Dimensions (W x D x H)</b> | 3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)                                                                                                                                                                                                                       |
| <b>Environment</b>            | Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)<br>Operating Humidity: 10%~90% non-condensing<br>Storage Humidity: 5%~90% non-condensing                                                                            |
| <b>Power Supply</b>           | External Power Adapter, 9V/0.6A or 5V/1A                                                                                                                                                                                                                          |

## MC111CS

The MC111CS is a media converter designed to convert 100BASE-FX fiber to 100Base-TX copper media or vice versa. It's designed for use with single-mode fiber cable utilizing the SC-Type connector. Adopting WDM technology, MC111CS takes only one fiber to transmit and receive data, which saves you half of the cabling cost. On this fiber, it works at 1550nm on transferring data and at 1310nm on receiving data. So the other end device cooperating with the MC111CS will work at 1310nm on transferring data and at 1550nm on receiving data. Another of TP-LINK's media converters, the MC112CS is just one example of potential devices with which to cooperate with the MC111CS. Moreover, MC111CS can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis, and is equipped with Link Fault Pass Through which minimizes the loss caused by link failure.

### Features:

- Auto negotiation of 10/100Mbps and Auto MDI/MDIX for TX port
- Provide switch configuration of Half-Duplex / Full-Duplex transfer mode for TX port
- Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
- Adopts WDM technology, transmitting and receiving data on one single fiber
- Extend fiber distance up to 20km
- Easy-to-view LED indicators provide status to monitor network activity easily

### Specifications:

|                               |                                                                                                                                                                                                                                                                   |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>              | IEEE 802.3u, IEEE 802.3x                                                                                                                                                                                                                                          |
| <b>Basic Function</b>         | Half/Full-Duplex transfer mode for TX port<br>Full Duplex Flow Control (IEEE 802.3x)<br>Half Duplex Flow Control (Backpressure)<br>Extends fiber distance up to 20km<br>Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely |
| <b>Interface</b>              | 1 100Mbps SC port<br>1 100Mbps RJ45 port (Auto MDI/MDIX)                                                                                                                                                                                                          |
| <b>Wave Length</b>            | TX: 1550nm<br>RX: 1310nm                                                                                                                                                                                                                                          |
| <b>Network Media</b>          | 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-T: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-FX: Single-mode Fiber                                          |
| <b>LED Indicators</b>         | PWR, SPD, LFP, FDX/Col, Link/Act                                                                                                                                                                                                                                  |
| <b>Certifications</b>         | FCC, CE                                                                                                                                                                                                                                                           |
| <b>Dimensions (W x D x H)</b> | 3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)                                                                                                                                                                                                                       |
| <b>Environment</b>            | Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)<br>Operating Humidity: 10%~90% non-condensing<br>Storage Humidity: 5%~90% non-condensing                                                                            |
| <b>Power Supply</b>           | External Power Adapter, 9V/0.6A or 5V/1A                                                                                                                                                                                                                          |

## MC112CS

The MC112CS is a media converter designed to convert 100BASE-FX fiber to 100Base-TX copper media or vice versa. It's designed for use with single-mode fiber cable utilizing the SC-Type connector. Adopting WDM technology, MC112CS takes only one fiber to transmit and receive data, which saves you half of the cabling cost. On this fiber, it works at 1310nm on transferring data and at 1550nm on receiving data. So the other end device cooperating with the MC112CS will work at 1550nm on transferring data and at 1310nm on receiving data. Another of TP-LINK's media converters, the MC111CS is just one example of potential devices with which to cooperate with the MC111CS. Moreover, MC112CS can work as a stand alone device (no chassis required) or with TP-LINK's 19" system chassis, and is equipped with Link Fault Pass Through which minimizes the loss caused by link failure.

### Features:

- Auto negotiation of 10/100Mbps and Auto MDI/MDIX for TX port
- Provide switch configuration of Half-Duplex / Full-Duplex transfer mode for TX port
- Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely
- Adopts WDM technology, transmitting and receiving data on one single fiber
- Extend fiber distance up to 20km
- Easy-to-view LED indicators provide status to monitor network activity easily

### Specifications:

|                               |                                                                                                                                                                                                                                                                   |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>              | IEEE 802.3u, IEEE 802.3x                                                                                                                                                                                                                                          |
| <b>Basic Function</b>         | Half/Full-Duplex transfer mode for TX port<br>Full Duplex Flow Control (IEEE 802.3x)<br>Half Duplex Flow Control (Backpressure)<br>Extends fiber distance up to 20km<br>Link Fault Pass Through and Far End Fault minimize the loss caused by link failure timely |
| <b>Interface</b>              | 1 100Mbps SC port<br>1 100Mbps RJ45 port (Auto MDI/MDIX)                                                                                                                                                                                                          |
| <b>Wave Length</b>            | TX: 1310nm<br>RX: 1550nm                                                                                                                                                                                                                                          |
| <b>Network Media</b>          | 10BASE-T: UTP category 3, 4, 5 cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-T: UTP category 5, 5e cable (maximum 100m)<br>EIA/TIA-568 100Ω STP (maximum 100m)<br>100BASE-FX: Single-mode Fiber                                          |
| <b>LED Indicators</b>         | PWR, SPD, LFP, FDX/Col, Link/Act                                                                                                                                                                                                                                  |
| <b>Certifications</b>         | FCC, CE                                                                                                                                                                                                                                                           |
| <b>Dimensions (W x D x H)</b> | 3.7 x 2.9 x 1.1 in. (94.5 x 73.0 x 27.0 mm)                                                                                                                                                                                                                       |
| <b>Environment</b>            | Operating Temperature: 0°C~40°C (32°F~104°F)<br>Storage Temperature: -40°C~70°C (-40°F~158°F)<br>Operating Humidity: 10%~90% non-condensing<br>Storage Humidity: 5%~90% non-condensing                                                                            |
| <b>Power Supply</b>           | External Power Adapter, 9V/0.6A or 5V/1A                                                                                                                                                                                                                          |

## More information of the 100Mbps series Media Converter

| Type    | Connector | Transmission Distance | Transmission Media   | Wave Length       |
|---------|-----------|-----------------------|----------------------|-------------------|
| MC100CM | RJ45--SC  | 2km                   | Multi-mode Fiber,TP  | 1310nm            |
| MC110CS | RJ45--SC  | 20km                  | Single-mode Fiber,TP | 1310nm            |
| MC111CS | RJ45--SC  | 20km                  | Single-mode Fiber,TP | 1550nmTX/1310nmRX |
| MC112CS | RJ45--SC  | 20km                  | Single-mode Fiber,TP | 1310nmTX/1550nmRX |

## More information of the 1000Mbps series Media Converter

| Model NO. | Interface | Transmission Distance                   | Transmission Media          | Wave Length               |
|-----------|-----------|-----------------------------------------|-----------------------------|---------------------------|
| MC200CM   | RJ45--SC  | 0.55km(50/125um),<br>0.22km(62.5/125um) | Multi-mode Fiber,TP         | 850nm                     |
| MC210CS   | RJ45--SC  | 15km                                    | Single-mode Fiber,TP        | 1310nm                    |
| MC220L    | RJ45--SFP | 0.55km /10km                            | Multi/Single-mode Fiber, TP | Depend on used SFP module |