

KVR533D2M4/512

512MB 64M x 72-Bit DDR2-533

CL4 Registered 244-Pin ECC MiniDIMM

DESCRIPTION:

This document describes ValueRAM's 64M x 72-bit (512MB) DDR2-533 CL4 SDRAM (Synchronous **DRAM**) registered ECC memory module. The components on this module include nine 64M x 8-bit (16M x 8-bit x 4 Bank) DDR2-533 SDRAM in FBGA packages. This 244-pin MiniDIMM uses gold contact fingers and requires +1.8V. The electrical and mechanical specifications are as follows:

FEATURES:

✓ Clock Cycle Time (tCK) CL=4	3.75ns (min.) / 8ns (max.)
✓ Row Cycle Time (tRC)	55ns (min.)
✓ Refresh to Active/Refresh Command Time (tRFC)	75ns
✓ Row Active Time (tRAS)	40ns (min.) / 70,000ns (max.)
✓ Single Power Supply of	+1.8V (+/- .1V)
✓ Power	2.556 W (operating)
✓ UL Rating	94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

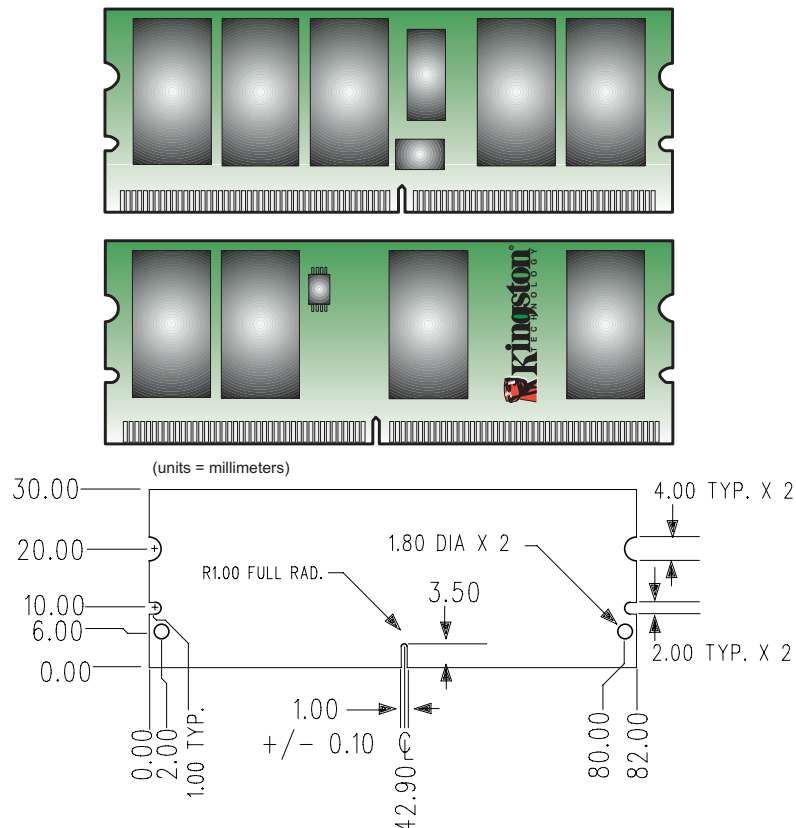


Figure 1: KVR533D2M4/512 244-Pin MiniDIMM