


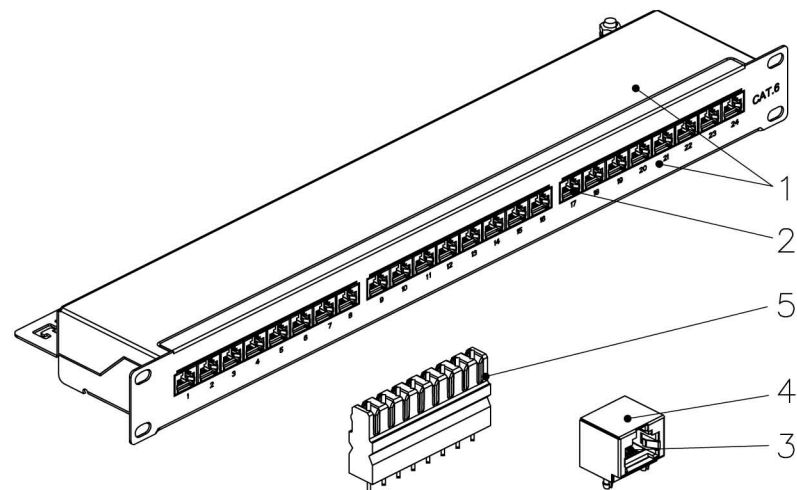

KRONE 45°-110 DUAL IDC

RJ45
RIGHT ANGLE JACK

SCALE 1/4


Specification :

Material :

1. Panel : SECC, 1.2 mm thickness with optional color painted.
2. RJ45 Jack :
 - 2-1. Housing : PBT+Glass Fiber, UL 94V-0.
 - 2-2. Contact Bracket : PBT+Glass Fiber, UL 94V-0.
3. RJ45 Jack Contact :
 - 3-1. Material : Phosphor Bronze with Nickel plated.
 - 3-2. Finish : 50 micro-inch Gold plated on Plug contact area.
4. RJ45 Jack Shield : Bronze With Nickel plated.
5. IDC :
 - 5-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 5-2. Terminal : Phosphor Bronze with Tin plated.
6. PCB : FR4, UL 94V-0.


Performance :

- a. T568A & T568B wiring printing on IDC.
- b. Insertion force : 30N max. (IEC 60603-7-5)
- c. Retention strength : 7.7 kg between Jack and Plug.
- d. Operating temperature : -10°C to 60°C. (ISO/IEC11801, ANSI/TIA/EIA568 B.2)
- e. Life(mating cycles) :
 - *Jack : 750 cycles min. (ISO/IEC 11801, IEC 60603-7-5)
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, Compatible with both 110 & Krone punch down tools.
- f. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.



440.0±0.5

109.0±0.5

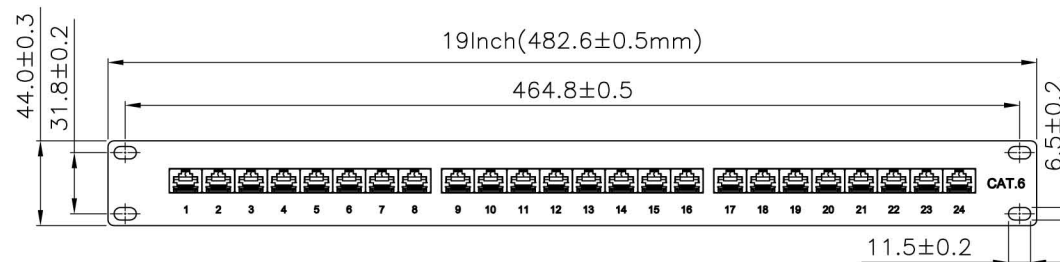

19Inch(482.6±0.5mm)

464.8±0.5

11.5±0.2

(1)XX : Patch Panel color
01=Black(RAL9005),

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		27.SEP.2010		WESLEY		PP1012					
	CHECK		27.SEP.2010		JANE							
	APPROVAL		27.SEP.2010		JAIMY							
			DATE		NAME							
	SCALE		1/4 (A4)		UNIT		mm		DES.: CAT.6 FULL SHIELDED PATCH PANEL			
			DRAWING NO.									
DRAWING CLASSIFICATION			S								SHEET	