

Liebert® PSI is a compact, line-interactive UPS system designed especially for IT applications such as network closets and small data centers. It provides reliable power protection for servers, critical nodes, network workstations, large network peripherals, network routers, bridges, and other electronic equipment

The flexible design of Liebert PSI allows the UPS to be configured as a self-standing tower or to be rack-mounted within a 2U space. It is available in five capacities, and both 120V or 230V models.

The UPS features an innovative line-interactive design incorporating buck/boost automatic voltage regulation technology. This protects against utility voltage fluctuation by raising and lowering utility power to the level needed by the connected equipment. It also allows the UPS to prolong battery life by maximizing its time on utility power before going to battery.

Flexibility:

- Eight battery-backed outlets
- Configurable input voltage window
- Rotatable Display Panel
- Automatic Frequency Sensing
- Rack Rail Kit
- Multiple Communications Options:
 - Contact Closure, USB and SNMP.

Higher availability:

- Data line surge protection
- Advance early warning of UPS system status
- Up to five minutes of battery backup time at full load when utility fails
- Full sequenced battery testing
- Surge protection
- Remote emergency power off
- Hot swappable batteries.

Lowest total cost of ownership:

- 0.9 Output Power Factor
- Wider input voltage window
- Reduced installation time and costs
- Warranty Protection.

Ideally suited for:

- PCs
- Network workstations
- Servers
- Network closets
- Large network peripherals
- VoIP.



Liebert PSI 2U Rack version


Liebert PSI 2U Tower version

Liebert® PSI Specifications

MODEL NUMBER	P5750RT3-230	PS1000RT3-230	PS1500RT3-230	PS2200RT3-230	PS3000RT3-230
Power Rating	750 VA/675 W	1.000 VA/900 W	1.500 VA/1.350 W	2.200 VA/1.980 W	3.000 VA/2.700 W
DIMENSIONS, W X D X H - MM					
Unit			440 x 412 x 88		440 x 657 x 88
Shipping			560 x 595 x 228		560 x 776 x 228
WEIGHT - KG					
Unit	15	19,4	20,9	33,8	37,2
Shipping	18,2	22,6	24,1	38,3	41,5
INPUT AC PARAMETERS					
Surge Protection			220J		
Voltage Range Without Battery Operation				165-300, Configurable	
Frequency Range				45-65 Hz, (±0,5 Hz)	
Input Socket		IEC-320-C14			IEC-320-C20
Output Receptacles		(8) IEC-320-C13			(8) IEC-320-C13 - (1) IEC-320-C19
Voltage, Normal Mode			220/230/240 VAC, Configurable, ±10%		
Voltage, Battery Mode			220/230/240 VAC, Configurable; ±5% Before Low Battery Warning		
Transfer Time			4-6 ms, Typical		
Waveform			Sinewave		
Overload Warning			> 100%		
BATTERY PARAMETERS					
Type			Valve-Regulated, Nonspillable, Lead Acid		
Quantity x Voltage x Ah	2 x 12 x 7,2	3 x 12 x 7,2	3 x 12 x 9	6 x 12 x 7,2	6 x 12 x 9
Backup Time			See Load Autonomy table below		
Recharge Time			5 hours to 90% of rated capacity, after full discharge into resistive load		
ENVIRONMENTAL					
Operating Temperature			0°C to 40°C (32°F to 104°F)		
Storage Temperature			-15°C to 40°C (5°F to 104°F)		
Relative Humidity			0% to 90%, non-condensing		
Operating Altitude			Up to 3000m (10,000 ft.) at 35°C (95°F) without derating		
Audible Noise			<45 dBA		
AGENCY					
Safety			IEC/EN/AS 62040-1-1		
Surge			IEC/EN/AS61000-4-2		
ESD			IEC/EN/AS61000-4-3		
Susceptibility			IEC/EN/AS61000-4-4		
Electrical Fast Transient			IEC/EN/AS 62040-2 2a Ed Classe A		
Emissions			IEC/EN/AS61000-4-6		
Conducted Immunity			IEC/EN/AS61000-3-2		
Harmonics			IEC/EN/AS61000-4-6		
Transportation			ISTA Procedure 1A Certification		
Environmental			ROHS compliant		
Warranty			2 years standard (+ 1 year warranty extension available)		
Packaging			Multi-Language User Manual on CD, Liebert MultiLink Software on CD, Contact Closure (ML9P9S) Cable USB Cable, Tower Stand, Mounting Hardware, Rack-Mount Handles, Fixed Mounting Rails, EPO Connector, Input Power Cord, 2200/3000 only: 2 - (1) Schuko to IEC-320-C19 and (1) UK plug to IEC-320- C19 input cord, IEC Output Cable, 750/1000/1500 only: 2 - (2) IEC-320-C13, IEC Output Cable, 2200/3000 only: 3 - (3) IEC-320-C13		

LOAD AUTONOMY - LIEBERT PSI 750VA-3000VA						
	Load %	750 VA	1.000 VA	1.500 VA	2.200 VA	3.000 VA
INTERNAL BATTERY	10	84	93	76	82	76
	20	45	47	32	44	32
	30	25	26	17	19	17
	40	15	15	12	14	12
	50	11	12	9	11	9
	60	9	9	7	9	7
	70	7	7	5	7	5
	80	5	6	4	5	4
	90	4	5	3	4	3
	100	4	4	3	3	3

Note: All run times are in minutes, assume fully charged batteries and are typical at 25°C (77°F) with resistive loads.

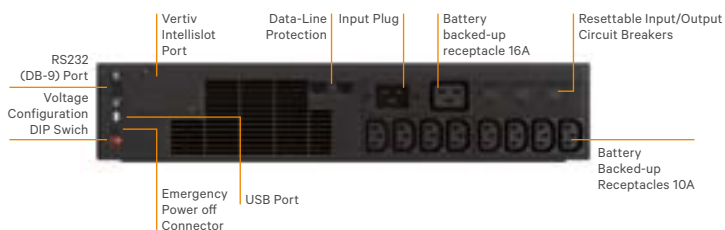

Tech Support

Always On! Our Commitment to your daily Business, provided by multi language Tech Support.

Toll-free 0080011554499

Toll +39 02 98250222

eoc@VertivCo.com

VertivCo.com | Vertiv Infrastructure Limited, George Curl Way, Southampton, SO18 2RY, VAT Number: GB188146827

© 2016 Vertiv Co. All rights reserved. Vertiv™, the Vertiv logo, Vertiv Intellislot® and Liebert® PSI are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.