

CE252

KVM Extender



CE252R (Remote)




CE252L (Local)


Console
PS/2

Computers
SPHD PS/2

Extension
300 meters

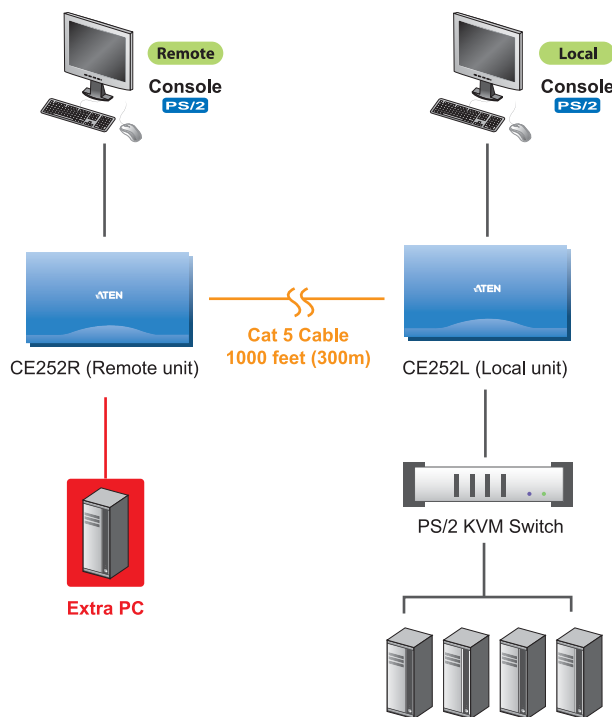

Non-Powered


NEW OS Support
Vista

2000V
Surge Protection

Features

- Uses Cat 5 cable to connect the local and remote units (up to 300m apart)
- Dual Console Operation - control your system from both the local and remote PS/2 keyboard, mouse and monitor consoles
- Additional PC connection allowed for the remote unit
- Built-in 8KV ESD protection and 2KV surge protection **New!**
- Local unit takes its power from the computer – external power is only required when the power from the local computer/computers in the KVM installation is insufficient **New!**
- Supports DDC2B for local monitor
- Built-in ASIC for greater reliability and compatibility
- PS/2 and Microsoft Intellimouse support
- Pushbutton selection - sequential selection between local and auto mode
- Hotkey operation – switching between PCs
- Two gain control modes provided for the sharpest video quality-adjustable or automatic
- Adjustable gain control - manually adjusts signal strength to compensate for distance
- Automatic Gain Control - automatically adjusts signal strength to compensate for distance
- High video resolution - up to 1600 x 1200@60Hz



Specifications

Function		CE252L	CE252R	
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN female (Purple)	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN female (Green)	1 x 6-pin Mini-DIN Female (Green)
	KVM Ports	Keyboard/ Video/ Mouse	1 x SPHD-15 Female (Yellow)	
	Unit to Unit		1 x RJ-45 Female	
	Power		1 x DC Jack	
LEDs (Local)	Local	1 (Green)	1 (Green)	
	Remote	1 (Green)	1 (Green)	
Switches	Selection Mode		1 x Pushbutton	N/A
	Manual Gain Control		N/A	1 x Knob
	Auto/Manual Gain Selection		N/A	1 x Slide
	Hotkey Selection		N/A	1 x Slide
Emulation	Keyboard/ Mouse		PS/2	
Video		1600 x 1200 @ 60Hz, 150m 1024 x 768 @ 60Hz, 300m		
Signal Range		300m (1000')		
Power Consumption		DC5.3V, 2.6W		
Environment	Operating Temp.		0-50°C	
	Storage Temp.		-20-60°C	
	Humidity		0-80% RH, Non-condensing	
Physical Properties	Housing		Metal	
	Weight		0.35 kg	0.35 kg
	Dimensions (L x W x H)		13.90x8.78x3.59cm	13.90x8.78x3.59cm

* The specifications and pictures are subject to change without notice.

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District, New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com

Printed 05/2014 V3.0



© Copyright 2014 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.