



8-Bay High Power PoE Chassis



POC-4000

H/W Version: 1


POC-4000 is a rugged and durable 8-Bay high-power PSE chassis that houses up to 8 POI-4000(-Z) PoE injectors. All injectors are securely fastened in the 19" 4U chassis for easy management and deployment.

POI-4000(-Z) is a high-power PoE injector suited for any IEEE 802.3af PoE device.

The maximum power output is 40W which is a significant boost to the 15.4W of standard PoE. This

provides an ideal solution for large PoE network devices like PTZ IP Cams, IP Cams that require power for built-in IR LEDs, or 802.11n WiFi APs.

Building a large PoE network from a single location has never been easier as POC-4000 supports centralized management for all PoE devices. Installation is simple and easy and you will the PoE network deployed faster than ever with this complete plug and play solution.

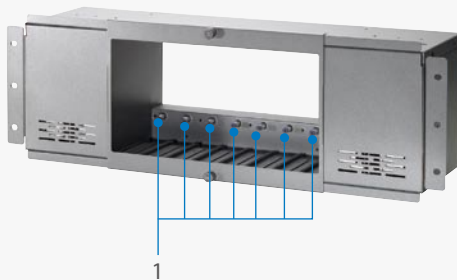

1. Power Jack
2. Power Cord Socket
3. Power On/Off Switch

Key Features

- Accommodates up to 8 bays for high-power PoE-PSE POI-4000(-Z)
- Standard 19" Chassis mountable for space-saving convenient installation
- Plug & play features for easy system expansions
- Two DC electric fans for thermal ventilation
- 250V 5A Fuse Protection

Works Well With



POI-4000
High-power PoE Injector



POI-4000-Z
High Power Injector has no external adapter

Technical Specification

Input Voltage

100-240VAC 50/60Hz

Plug Output

$$(24\text{VDC}/5.2\text{A}) \times 4$$

DC Fans

24VDC

Fuse

250V 5A socket embedded

Dimensions (L x H x D)


483mm x 153mm x 120mm

Weight

3.1 kg

7.5 kg with 8 x POI-4000(-Z)

Product Diagram

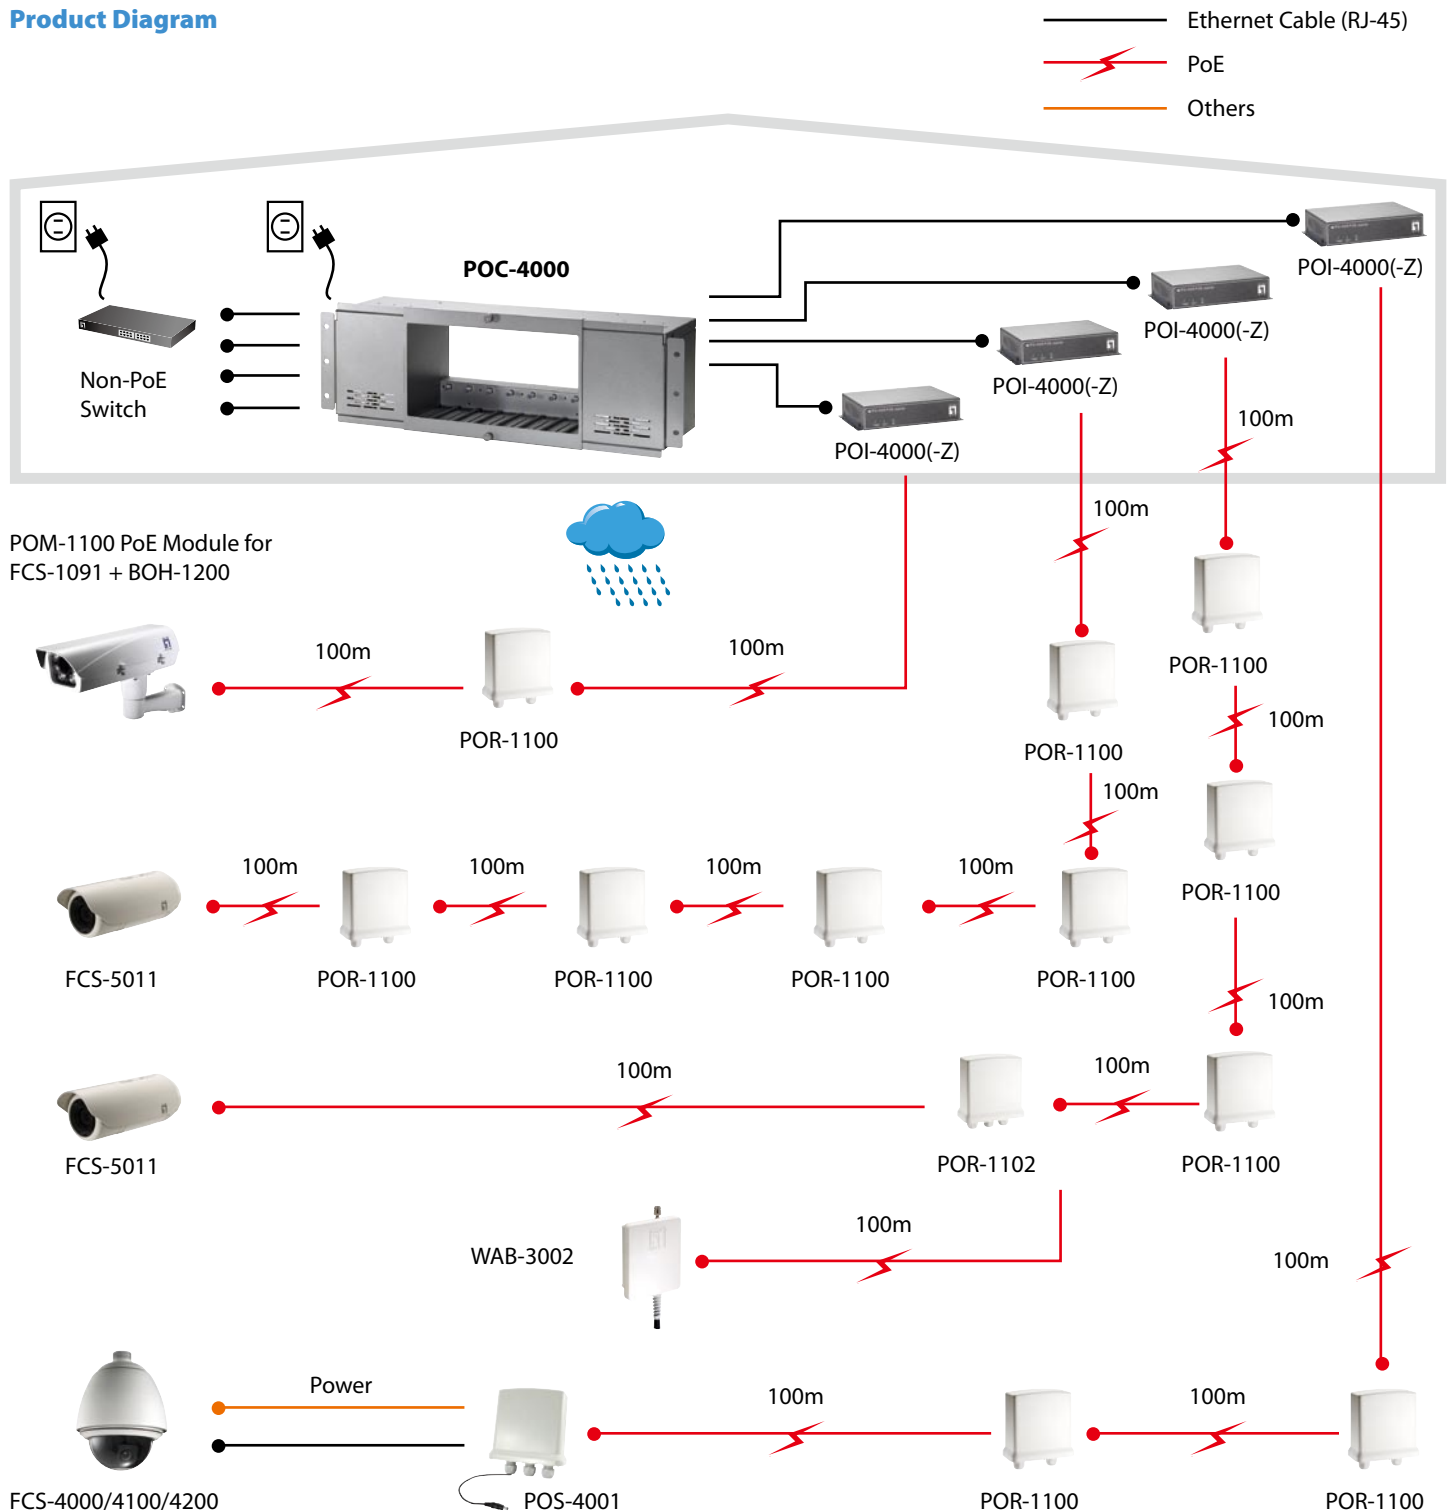

Note: These distances are typical results when used with 18~19Ω 24 AWG Cat.5 Cable

Order Information

Package Contents

POC-4000: 8-Bay High Power PoE Chassis

POC-4000 x1

AC Power Cord x1

User Manual x1