



ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT



CUSTOMER'S APPROVAL: _____ DATA: _____
FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☐ NO.

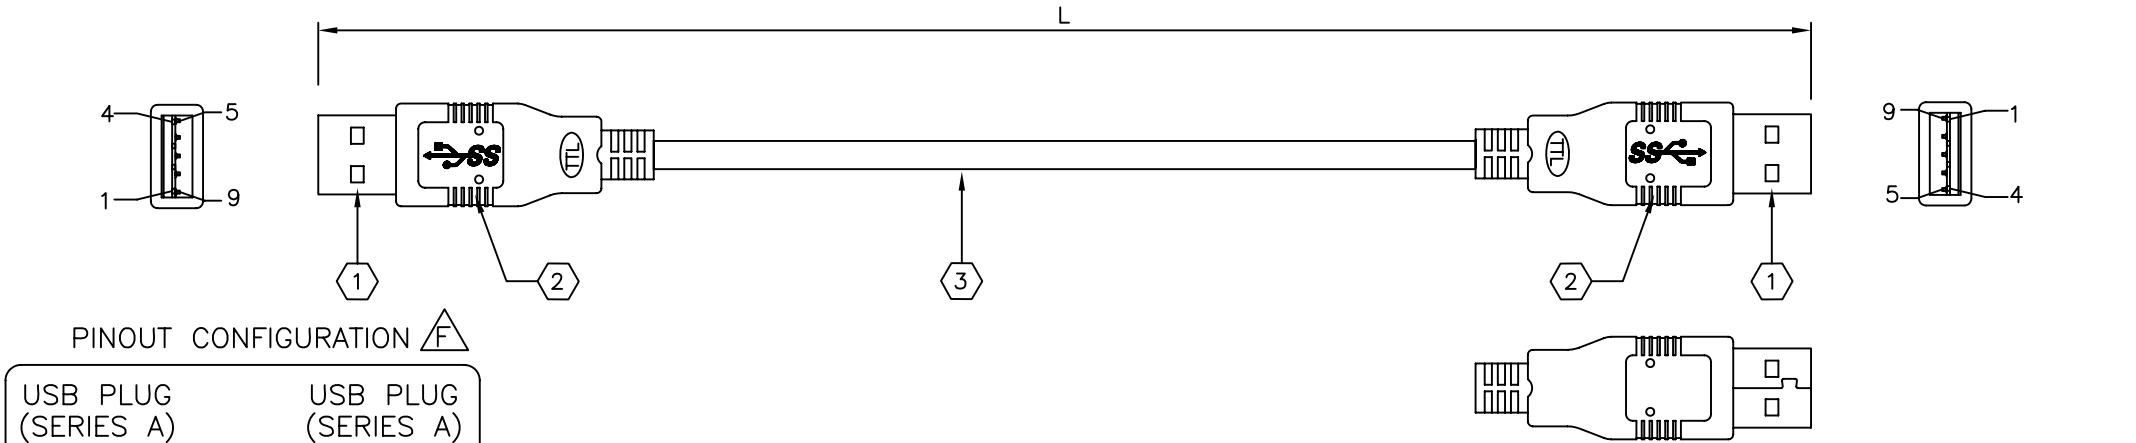

PINOUT CONFIGURATION

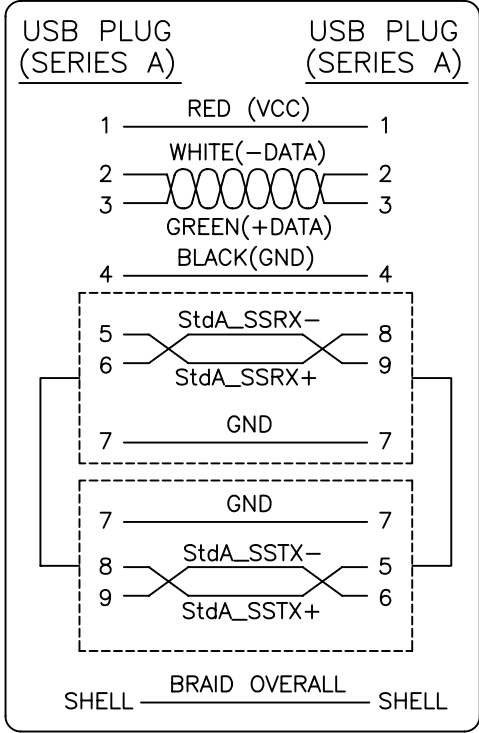

P/N	L(mm)
SB3002	2000±50
SB3003	3000±100

ITEM	DESCRIPTION	QTY.	UNIT
1	USB 3.0 PLUG SERIES	2	PCS.
2	USB TYPE A MOLDED BLACK PVC HOOD	2	PCS.
3	UL20276(28AWG*1P+AL-MYLAR+DRAIN)*2C+28AWG*1P+22AWG*2C+AL-MYLAR+BRAID OVERALL;BLACK PVC JACKET	SEE	DWG.


UNIT:m/m

REVISED DETAILS


REV.	DESCRIPTION	DATE	REVISED BY	Part number:	Revision:	
B	CHANGE COLOR	09.09.29	Z.Q.KANG	SB300X	F	
C	CHANGE TTL LOGO TO ACT LOGO	11.02.21	Z.Q.KANG	RFQ number:	Drawing #: 090420-1	
D	CHANGE WIRE SPEC & DELETE SIZE 5M	11.02.22	Z.Q.KANG	Drawn by: Q.ZHOU	Scale: None	
E	CHANGE WIRE SPEC	11.02.23	Z.Q.KANG	Checked by:	Date: 04/20/2009	
F	CHANGE PINOUT	12.02.13	Z.Q.KANG			



ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT



CUSTOMER'S APPROVAL: _____ DATE: _____
FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☐ NO.

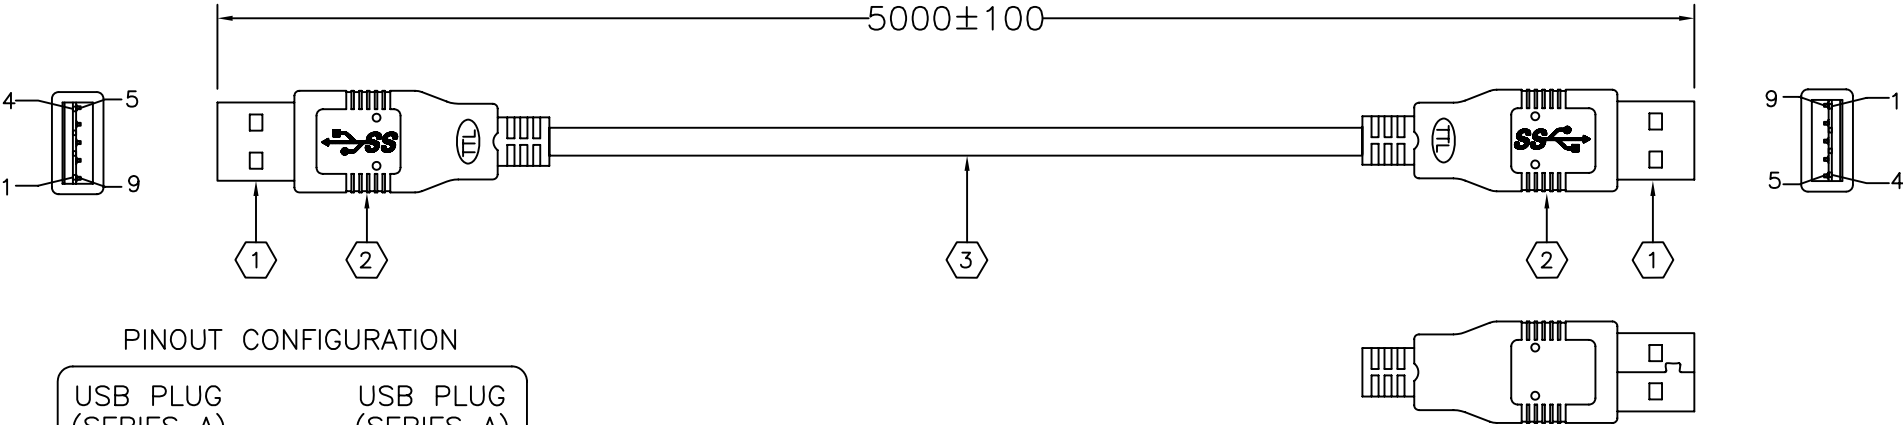

PINOUT CONFIGURATION

USB PLUG (SERIES A)		USB PLUG (SERIES A)	
1	RED (VCC)	1	
2	WHITE(-DATA)	2	
3	GREEN(+DATA)	3	
4	BLACK(GND)	4	
5	StdA_SSRX-	8	
6	StdA_SSRX+	9	
7	GND	7	
7	GND	7	
8	StdA_SSTX-	5	
9	StdA_SSTX+	6	
SHELL BRAID OVERALL SHELL			



UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	USB 3.0 PLUG SERIES	2	PCS.
2	USB TYPE A MOLDED BLACK PVC HOOD	2	PCS.
3	UL20276(28AWG*1P+AL-MYLAR+DRAIN)*2C+28AWG*1P+22AWG*2C+AL-MYLAR+BRAID OVERALL;BLACK PVC JACKET	SEE	DWG.

REVISED DETAILS			REVISED BY
REV.	DESCRIPTION	DATE	
A	CHANGE WIRE SPEC	2011.02.23	Z.Q.KANG
B	CHANGE PINOUT	2012.02.13	Z.Q.KANG
C	CHANGE WIRE SPEC	2013.08.09	Z.Q.KANG

Part number: SB3005	Revision: C
RFQ number:	Drawing#: 110222-4
Drawn by: Z.Q.KANG	Scale: None
Checked by:	Date: 02/22/2011

