

KVR1066D3D4R7SK2/8G

8GB (4GB 512M x 72-Bit x 2 pcs.) PC3-8500

CL7 Registered w/Parity 240-Pin DIMM Kit

DESCRIPTION

ValueRAM's KVR1066D3D4R7SK2/8G is a kit of two 512M x 72-bit 4GB (4096MB) DDR3-1066 CL7 SDRAM (Synchronous DRAM) registered w/parity, dual-rank memory modules, based on thirty-six 256M x 4-bit DDR3-1066 FBGA components per module. Total kit capacity is 8GB. The SPD is programmed to JEDEC standard latency 1066Mhz timing of 7-7-7 at 1.5V. This 240-pin DIMM uses gold contact fingers and requires +1.5V. The electrical and mechanical specifications are as follows:

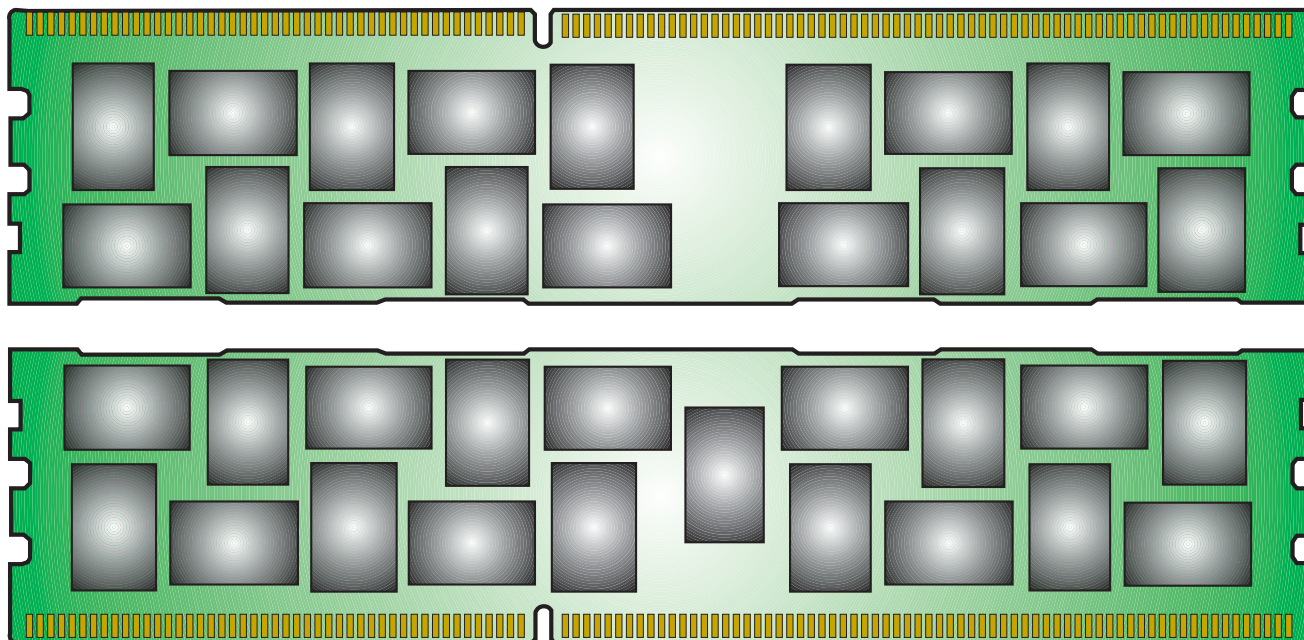
FEATURES

- JEDEC standard 1.5V $\pm$ 0.075V Power Supply
- VDDQ = 1.5V $\pm$ 0.075V
- 533MHz fCK for 1066Mb/sec/pin
- 8 independent internal bank
- Programmable CAS Latency: 6,7,8,9,10
- Programmable Additive Latency: 0, CL - 2, or CL - 1 clock
- Programmable CAS Write Latency(CWL) = 6(DDR3-1066)
- 8-bit pre-fetch
- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- Bi-directional Differential Data Strobe
- Internal(self) calibration : Internal self calibration through ZQ pin (RZQ : 240 ohm $\pm$ 1%)
- On Die Termination using ODT pin
- On-DIMM thermal sensor (Grade B)
- Average Refresh Period 7.8us at lower than TCASE 85°C, 3.9us at 85°C < TCASE $\leq$ 95°C
- Asynchronous Reset
- PCB : Height 1.180" (30.00mm), double sided component

SPECIFICATIONS

CL(IDD)	7 cycles
Row Cycle Time (tRCmin)	50.625ns (min.)
Refresh to Active/Refresh Command Time (tRFCmin)	110ns (min.)
Row Active Time (tRASmin)	37.5ns (min.)
Power	5.085 W (operating per module)
UL Rating	94 V - 0
Operating Temperature	0° C to 85° C
Storage Temperature	-55° C to +100° C

Continued >>

MODULE DIMENSIONS:

(Units = millimeters)

