
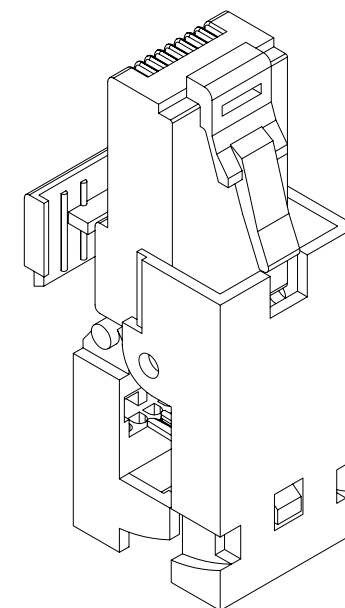
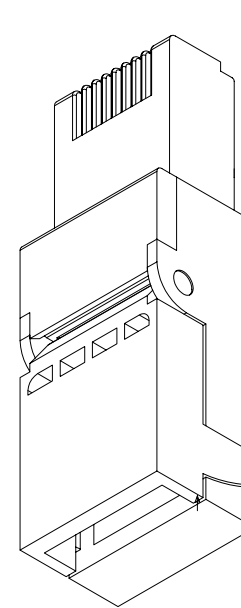
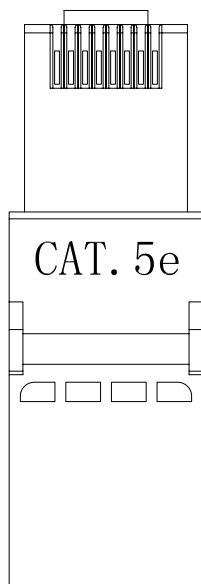
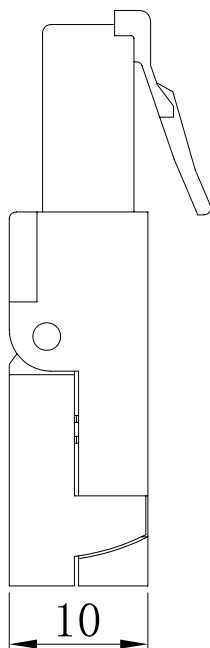
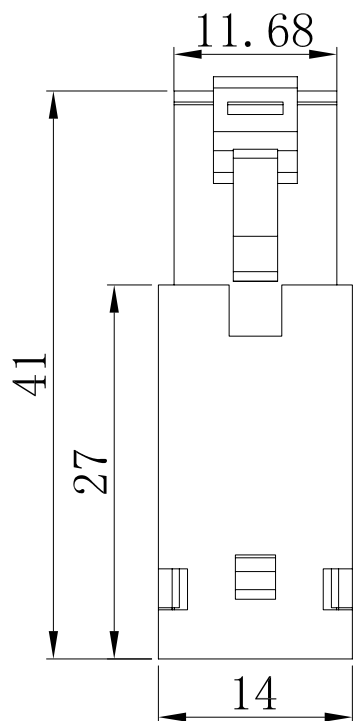





Color Colding Information

T568B

IDC terminal	color code
PIN. 5	WHITE/BLUE
PIN. 4	BLUE
PIN. 1	WHITE/ORANGE
PIN. 2	ORANGE
PIN. 3	WHITE/GREEN
PIN. 6	GREEN
PIN. 7	WHITE/BROWN
PIN. 8	BROWN

T568A

IDC terminal	color code
PIN. 5	WHITE/BLUE
PIN. 4	BLUE
PIN. 1	WHITE/GREEN
PIN. 2	GREEN
PIN. 3	WHITE/ORANGE
PIN. 6	ORANGE
PIN. 7	WHITE/BROWN
PIN. 8	BROWN

Specification

1. Plug: Tooless RJ45.
2. RJ45 Body: PC UL94V-0, Black color.
Contact: Phosphor Bronze, Nickel plated in contact area Tin-lead over nickle in solder area.
3. P.C. Board: FR4, 1.6mm.
4. Operation Temperature : -10°C to 60°C.

Unless specified on the drawing, tolerances are per the follows:

X.	±0.20	X°	±3
.X	±0.10	.X°	±0.3
.XX	±0.05		



DRAW. NO					
ITEM					
121163-v1(Cat.5e)					
DEPARTMENT		DRAW		DATE	
SCALE		APPROVED		DATE	
UNIT		SHEET		1 OF 1	

Material	See the drawing detail	Part Number
----------	------------------------	-------------

Note

3RD

